

0445110059 Injector CRI1-13 Technical File

SKU: G1W20445110059









0445110059 Injector CRI1-13 Technical File

0445	5110059 Inje	ctor CRI1	-13 Tech	nical File	ļ	o	a		ž	E	£	. 3
1. 04	145110059 1.1.044511	Injector's	Introdu	ction	0.355	1000	1000	4.000	1 1000 m	1	4.000	3
50	1.1.044511	.0059 Ini	ector's B	asic Infor	mation	9w	24.	24	84	84	84	3
	1.2.044511											
-63	1.3.044511	0059 Ini	ector's N	latching	Informat	ion	4.00	4.00	4.375	2000	2000	4
911	1.4.044511	0059 Inj	ector's P	arametei		-Self.	91.	30,	387	300	300	5
. 6.5	1.5.044511 1.6. 04451 1.7. 04451	10057 III)	ioctor's C	Juglity C	ontrol	Difficusio	JI 13	1. 18 ²²	4.50	0.000	. a. 10 ¹⁰	J
3877	1.0.04451	10059 III	jector's C	Luctomiza	od Comio	•		.387	-37	- 33400		د
	1.7. 04451.	10029 10	jector's C	ustomize	ea Servic	e						5
e. 0	1.8.044511	0059 inj	ector's P	acking Li	st and Pa	ckage Siz	e	المينية المناطقة الم المناطقة المناطقة ا	\		المراجعة ال المراجعة المراجعة ال	6
211	1.9.044511											
	1.10.04451	10059 Ir	njector's '	Warranty	/ Instruct	ions						7
	1.11.04451	10059 Ir	njector's	Manufac	turer			التوريدا د التوريد	\	التوريد التوريد	l	8
2.04	1.11.04451 45110059	njector T	echnical	Support.	- GT	400		- 1915 · · · · · · · · ·	. 1971	. 197	. 5	8
	2.1.044511	.0059 Inj	ector's Pa	art Numl	oer Locat	ion						8
- 4	2.2.044511	0059 Inj	ector's A	pplicatio	n Scenar	ios		التوريبين	` <u></u>			8
240	2.2.044511 2.3.044511	0059 Inj	ector's In	stallatio	n	50°	- 780	201			. 55	9
	2.4.0445110	0059 Inje	ctor 's Re	asons fo	r Not Wo	orking No	rmally					9
	2.5.044511 2.6.044511	.0059 Inj	ector 's C	auses of	Damage	S	1	i inggi			S	10
$\otimes_{B_{2,2}}$	2.6.044511	.0059 Inj	ector's Te	echnical s	Support (Obtaining	g Method	ls	St. 200.	S1	68 ⁷	10
3.04	45110059	niector's	Purchase	e and De	liverv							10
	45110059 3.1.044511 3.2.044511	0059 Ini	ector's P	urchase I	Payment	Terms	S. 1885		Same and S	S	S	10
$2 k_{f(t)}$	3 2 044511	0059 Ini	ector's M	lain Sale	s Market	C. 2/1	21/20	83,000	822/000	83000	37,000	11
	3 3 044511	0059 Inj 0059 Ini	ector's D	eclaratio	n Requir	ements	• • • • • • • • • • • • • • • • • • • •	••••••	••••••	••••••		11
	2 4 044511	.0037 IIIj .0050 Ini	octor's SI	ninning V	Mays	Cilicitis.	V	- 12 Page	2000	1	1000	11
$a_{h_{2}}$	3.3.044511 3.4.044511 3.5.044511	الله (1005) انما	octor's L	iippiiig v	vays	90	980	84	37	32,000	927	197
	3.6.044511	.0039 IIIJ .0050 In:	ector's L	au time	ima for F	Nostinoti		China's	 ^ roos	•••••	•••••	II 11
	3.0.044511	.0059 1113	ector's E	ogistics i	ime for L	estinatio	on Out of	Chinas	Areas	· · · · · · · · · · · · · · · · · · ·		0 TT
900	3.7.044511 45110059	.0059 inj	ectors P	acking							a.suri	†4
4.04	451100591	njector's	Storage	Standard	l			•••••	•••••	•••••	•••••	12
5. Co	mpany Info	rmation			(ξ	4	() 1880a	٠ الأوادي			ុ 13
SHI	5.1. Compa 5.2. Salesm	ny Introd	uction									13
6. Co	pyright Stat	ement		(i	i	(نام	Ç	Ç	<u>.</u> 14
49.0	24,000	37.500	24/12/10		SHARREY	Shipper.	Shipper.	Shipper.	Shipper.	Shright	27,200	\$8 ²
	NATURAL	SHRISTA	SHUTTER	SHELFER	SHAMM	SHORES	SPLEET	Shippy.	SHUTTH	r Sh ^{agar} i	SPECION T	ç
3/1/	- SANDOW.	38 300 ·	31 3m	SHEET .	Stallan	Algorithm.	April 1	Shipper.	Shipper.	Ships.	38,500	\$3 ⁵
	NET STATES	SHARRA	SHEEDS	SHRINK	SHAMM	SHIRKE	SPLIDE	SHIPPET	SHUDHT	SPANE.	SHEADHT	ç
$e^{ik^{2}}$	Section 1	Shipper.	Shippin.	Shippin.	Spanner.	Show.	Show.	Shipper.	25/10/201	Shippin.	38 ³⁵⁰⁰	98 ⁹
			_	_	_			-	-			
	Maria State of the Control of the Co	SPANIST SPANIST	SHERRIE	SHERRELL	SHIRING	SPANIS	SHUMST	Shipper	sh ^{gggst}	SPANE.	SPECIFIC	ş
40 P	- 100 p. 100 p. 1	A. 1979 .	10 pt 1000 r	100 m	400 Jane .	ent of the contract of	est specimen	est Stor.	400 July 1	A. 1500	10 m	$\mathbb{S}^{\frac{2}{3}}$
									5			
	Section of the sectio	SHERING.	SHAMMY.	SHARRAY	21 MARINET	SHEARING	SHAMMET SHAMMET	SHOWER	SHIPPET.	Shiring.	Physical Control	Ç
-9P-3	m. Apple.	Shipper.	Shipper.	States.	Shipper.	Stages.	Supplier.	STATISTICS.	Shipper.	Shipper.	Spine.	şiğ.
		200									10.0	
	95 ^{Cl} 95C	1		7.000m.	V	1	t	1	test	1	1	Ç
- 1	Mar. 1000.	1,409,5	-400,000	. 4000	- 200	1000	1000	1000	1000	1,000,00	1.4000	4

Mob/WhatsApp: +86 13410541523 Email: ruby@shumatt.com

© 2022 Shenzhen Shumatt Technology Co., Ltd

Tel: +8675523215133 Website: www.shumatt.com



0445110059 Injector CRI1-13 Technical File

1. 0445110059 Injector's Introduction

1.1.0445110059 Injector's Basic Information

Title	China made new high quality diesel injector 0445110059 fuel injector 51 10100 6127 0 986 435 149 OE 05066820AA
SKU	G1W20445110059

1.2.0445110059 Injector's Common Part Number

(1) Injector's Exchange Information

Injector Part Number	Re-manufactured Part Number				
0445110059	0 986 435 149				

(2) Injector's Application Information

Injector Part Number	CHRYSLER Car Number	JEEP Car Number	LDV GROUP LIMITED Car Number	VM Car Number
0445110059	05066820AA	05066820AA	510990024	15 06 2036F
0445110059	5066820AA	5066820AA	The Piles To	1 / min

(3) Injector's Part Number Common Writing

0445110059,0 445 110 059,0445 110 059,0445110 059,05066820AA,0 445 110059,5066820AA, 0 445110059,05066820AA,510990024,15062036F,5066820AA,05066 820AA,05066 820AA, 15 06 2036F,5066 820AA

Mob/WhatsApp: +86 13410541523 Tel: +8675523215133 Email: ruby@shumatt.com Website: www.shumatt.com



1.3.0445110059 Injector's Matching Information

Vehicle Brand	Series	Car Model	Engine Model	Production Date	Power (KW)	Horse Power	Emission Standards	Manufacturer	Emissions (L)	Cylinder	Power Source (V)
LDV GROUP LIMITED	Maxus 🦃	Maxus 2.5	VM39C	2005/01-2008/12	70-88	95-120	4	VM	2.5	4	12
LDV GROUP LIMITED	Maxus	Maxus 2.5	VM40C	2005/01-2008/12	70-88	95/120	stri Austri	VMA SHATT	2.5	4	12
CHRYSLER	Voyager [RG]	Voyager 2.5 CRD	ENC	09/2000 - 08/2001	105 kW	143 PS	1 ⁷⁷ / 100 P	C SPANT SPANT	2.5	4	12
CHRYSLER	Voyager [RG]	Voyager 2.5 CRD	ENJ	09/2001 - 08/2007 -	105 kW	143 PS	50 / Julius	C _2005C _2005C _2	2.5	4	12
CHRYSLER	Voyager [RG]	Voyager 2.5 CRD 4x4	ENC	09/2000 - 08/2001	105 kW	143 PS	50° / 10°		2.5	4	12
CHRYSLER	Voyager [RG]	Voyager 2.5 CRD 4x4	ENJ	09/2001 - 08/2007	105 kW	143 PS	**************************************		2.5	4	12
CHRYSLER	Voyager [RG]	Voyager 2.8 CRD	EÑR	08/2004 - 12/2007	110 kW	150 PS	* /	Shaper My hare	2.8	4	12
CHRYSLER	Voyager [RG]	Voyager 2.8 CRD 4x4	ENR	08/2004 - 12/2007	110 kW	150 PS	S. A.	C. Shippell Philipsell Sh	2.8	4	12
JEEP	Cherokee [KJ]	Cherokee 2.5 CRD 4x4	ĒNJ, ENO	03/2001 - 12/2004	105 kW	143 PS	17 / 18 / 18 / 18 / 18 / 18 / 18 / 18 /	VM (MOTORI/STABILIMENTI MEC.)	2.5	4	12
JEEP	Cherokee [KJ]	Cherokee 2.8 CRD 4x4	ENR STATE	03/2003 - 12/2007	112-120 kW	152-163 PS	50° / Jan ⁵⁰ 16	VM (MOTORI/STABILIMENTI MEC.)	2.8	4	12
JME	VM R2516	/	VM R2516_EU3	12/2006 -	156 kW	212 PS	55 / 55 / 55	(1 -0)(1 -0)(1	2.5	4	12

Mob/WhatsApp: +86 13410541523

Email: ruby@shumatt.com

© 2022 Shenzhen Shumatt Technology Co., Ltd

Tel: +8675523215133

Website: www.shumatt.com

100

18 B

1.4.0445110059 Injector's Parameter

Adaptation System: Common Rail System

Injector Series: 110 Series

Parameter Performance: CRI1-13

Matching Accessories: Gasket F 00V C17 503 (15.1*7.7*1.5cm Without Groove)

Injector Type: Electromagnetic Injector Support System Maximum Pressure: 1,350

Vehicle Configuration Information: CHRYSLER/JEEP/LDV GROUP LIMITED/VM

1.5.0445110059 Injector's Specifications and Dimensions

Injector Size: $21 \text{ cm}^* 7 \text{ cm}^* 6 \text{ cm} = 882 \text{cm}^3 (L^*W^*H=V)$

Injector Net Weight: 0.45kg

Gross Weight: 0.6kg

Injector Quality: China Made Brand New Injector
Package Size: 38000*7 **Package Size:** 28cm*7 cm *7 cm = 1372 cm³ Injector Type: Diesel Common Rail Injector

MOQ: 4 Pieces

1.6. 0445110059 Injector's Quality Control

(1) Injector Testing

All injector spare parts are tested for electrical characteristics, accuracy, high temperature, low temperature, withstand voltage, leakage, durability, and various working conditions.

(2) Injector Assembling

And the quality control of the injector production and installation process, our company strictly follows the standard product installation data and product installation steps to install, such as injector stroke test, injector solenoid valve tightening torque, injector nozzle tightening torque,

(3) Injector Inspection


The factory inspection of the injector is undergone full inspection, random inspection, and batch inspection three inspections. Different brands of test benches are used to test the same fuel injector for a total of no less than three times for factory inspection, and the fuel injector installation and test environment are progressed in dust-free workshop.

1.7. 0445110059 Injector's Customized Service

(1) Injector's Customized Service: Meet the customized needs of OEM manufacturers for shell lettering, logo engraving, injector internal packaging, injector external packaging and labels customized, etc.







Injector nozzle engraving

Injector solenoid valve engraving

(2) Injector's Customized Service Requirements:

The purchased of customized injector are not less than 10 pieces.

Customized injector packages no less than 1000 pieces.

Customized products involve the need of specify logo, the OEM manufacturer needs to provide trademark 311000 authorization and the sample of logo image file. 43000 all of the

▲ Once the customized fuel injector is sold, it cannot be returned or exchanged if there is no quality problems. The water with with with with with with

Mob/WhatsApp: +86 13410541523 Tel: +8675523215133 Email: ruby@shumatt.com Website: www.shumatt.com



1.8.0445110059 Injector's Packing List and Package Size

(1) Injector Spare Parts List

	or Spare raits List		
No.	1000 July 1000 July 1000		3000
lmage			DATT SHUDAT OF SHUDATT
Name	Fuel Injector	O-Ring	Gasket F 00V C17 503
Description	Fuel injector part number: 04451100!	Ensure to meet the standard of the sealing performance between the injector and the engine	Made of brass, used to ensure the tight fit between the injector cap end and the engine
No.	4	injector and the engine	eugine 6
Standard St	The second second second		MALL SERVICE SERVICES
Name	Nozzle Protective Cover Cap	Injector Inlet Hole Protective Cover	Injector Oil Return Hole Protective Cover
Description	Protect nozzle holes from being polluted and blocked	Protect the injector inlet hole from being polluted and blocked	Protect the injector oil return hole from being polluted and blocked
No.	7 3 S	31 31 8 31 31 ST	50° 50° 50° 50°
St Image	10 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	519.88 S19	DALL SH
and the second	I was not the	Si ali ali ali ali	the state of the state of
Name	VCI Anti-rust Bag	Bubble Bag	Injector Packing Box
Description	Prevent fuel injector from rusting	Prevent the injector from being damaged by external forces	Place injector and injector accessories
. a. 10000	TO 100 100 100 100 100 100 100 100 100 10	2,000 2,000 2,000	1770 - 17

A Minors are forbidden to use the fuel injector assembly, O-ring, gasket, nozzle protective cover, fuel injector house protective cover, solenoid valve protective cover, VCI anti-rust bag, and air bubble bag to avoid personal injury.

▲ O-ring and gasket are disposable installation accessories, and need to be replaced for re-installation.

▲ The nozzle protective cover, the injector house protective cover, and the solenoid valve protective cover are recyclable accessories that can be reused.

A VCI anti-rust bags and bubble bags are non-degradable materials, please dispose of them properly after using.

▲ The injector and the installation parts should be coated with appropriate sealing oil during installation.




Mob/WhatsApp: +86 13410541523 Email: ruby@shumatt.com

© 2022 Shenzhen Shumatt Technology Co., Ltd

Tel: +8675523215133 Website: www.shumatt.com



(2) Injector Box Size

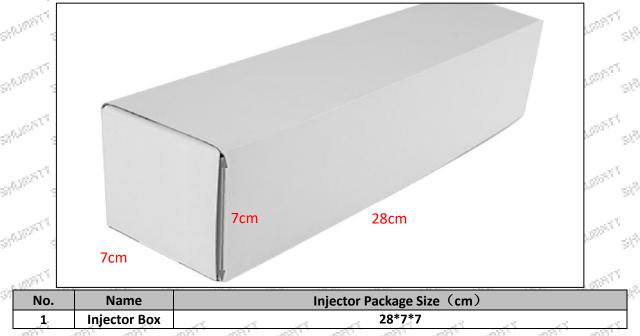

1.9.0445110059 Injector's Testing Standard and Certificate

We can provide the factory quality inspection test report of each injector to ensure that each injector delivered meets the engine performance indicators.



1.10.0445110059 Injector's Warranty Instructions

(1) . Product Warranty Conditions and Instructions

It is necessary to provide pictures, videos, or test reports detected by the injector inspection equipment when the injector is abnormal during use as evidence to feed back to the salesman.

Abnormal conditions are properly explained such as: 1.Smoke, 2. Engine shake, 3. Difficulty starting the engine, 4. Engine noise, 5. oil leakage etc.

(2) . Injector Warranty Coverage

Within 15 days after customer receives the **0445120219** injector, if there is a performance failure and the product has no appearance damage, customer can choose to replace it or repair it;

If the **0445120219** injector has performance problems during the warranty period (3 months), and it is confirmed that it is product's problems after testing, you can contact our salesmen to replace the same model or a reworked product with the same performance for free;

Mob/WhatsApp: +86 13410541523

Email: ruby@shumatt.com

© 2022 Shenzhen Shumatt Technology Co., Ltd

Website: www.shumatt.com

Tel: +8675523215133

If the injector house has obvious scratches, it can only be repaired and it will be returned as it is if the product is confirmed to be fault-free.

▲ Tips: For products not covered by warranty, our company can provide paid maintenance services. For products after paid repaired, the same performance problem will have a free warranty period within 3 months from the date of repairing.

(3) . Injector Out of Warranty Coverage

The warranty period has expired.

Injector failure caused by high temperature, high pressure, humidity, rain and snow, saline-alkali land, earthquake, and used in abnormal environment.

Customer disassembles or repairs the injector personally resulting in damage to the injector.

Injector damage caused by man-made reasons (throwing, strong magnetic field magnetization, set fire).

Injector failure or injector damage caused by non-injector design, technology, manufacturing, quality and other issues.

Injector failure due to system pressure exceeding system approved pressure.

Injector failure caused by system voltage exceeding approved voltage.

Injector failure caused by impurities (water, lead, aluminum powder, iron powder, sulfide) in the system fuel exceeding the standard requirements.

Injector failure caused by not installing according to the tightening torque specified in the vehicle engine maintenance manual (the tightening torque is too large or too small).

Injector failure caused by not following the installation angle specified in the vehicle engine maintenance manual.

Injector failure caused by not following the cleaning requirements specified in the vehicle engine maintenance manual.

Injector failure caused by failure to replace consumable parts as specified in the vehicle engine maintenance manual.

Injector failure caused by not complying with the intake system fit clearance and exhaust system fit clearance requirements specified in the vehicle engine maintenance manual.

Failure to replace the consumable parts and the fitting clearance of the oil inlet system pipeline and the fuel injector connection in accordance with the fuel intake system specified in the vehicle engine maintenance manual.

1.11.0445110059 Injector's Manufacturer

Injector's manufacturer: Shenzhen Shumatt Technology Co., Ltd

2.0445110059 Injector Technical Support

2.1.0445110059 Injector's Part Number Location

1) E.g.: The injector part number see as follows




	No.	Name				
ø	ST -45T	brand, logo, part number,				
	Silving Silving	series number				
	В	nozzle part number				
		2 2 2 2				

2.2.0445110059 Injector's Application Scenarios

Common rail system is an oil supply method refers to the diesel oil from the fuel tank sucked out by the gear pump through the oil-water separator and the gear pump to diesel fine filter, high-pressure pump, common rail pipe, and fuel injector, all together with the closed-loop fuel supply system composed of sensors and ECU that completely separates the generation of injection pressure and the injection process from each other.

Mob/WhatsApp: +86 13410541523 Tel: +8675523215133
Email: ruby@shumatt.com Website: www.shumatt.com



Pic No. 1

No.	Name	No.	Name	No.	Name	No.	Name
STATION	Tank	5	Common Rail Pressure Sensor	9	Engine Crankshaft Sensor	A	High Pressure Oil Circuit
2	Diesel Filter	6	Common Rail Pipe	10	Camshaft Sensor	B	Low Pressure Oil Circuit
313	High-Pressure Pump	7	Injector	11	ECU Electronic Control Unit	200°	200 St. 200
4	Fuel Gear Pump	8	Accelerator Pedal				
. Jagar	antiff and	417 mag	ATT STATE STATE	1000	1 100 May 1 100 May 1	1000 m	and and

2.3.0445110059 Injector's Installation

(1) .0445110059 Injector's Installation Precautions:

▲ The replacement of the fuel injector must strictly follow the electrical system, the approved pressure of the low-pressure fuel intake system, the approved pressure of the high-pressure fuel circuit system, and fuel system replacement consumables requirements (including the low-pressure fuel circuit system filter and the high-pressure fuel circuit) specified in the vehicle engine maintenance manual,

A Replacement of wearing parts of the fuel system, cleaning requirements for the connection between the fuel system and the injector, the fitting clearance of the fuel injector connection, the installation angle and tightening torque of the injector, the fitting clearance of the intake system, and the fitting clearance of the exhaust system to ensure the service life of the engine and the normal operation of the injector.

▲ When installing the fuel injector on the engine, it is necessary to clean the engine block, cylinder head and other parts connected to the fuel injector, and ensure that there is no dust, carbon deposits, water, rust spots, etc.

▲ Before installing, check whether the fuel injector nozzle gasket has been replaced and installed on the fuel injector.

▲ When installing the fuel injector, apply lubricant between the fuel injector, fuel nozzle sealing gasket and O-ring.

▲ Without replacing new gasket can lead to: deformation of the tight cap of nozzle, deformation of nozzle, deformation of nozzle orifice, oil leakage and air leakage, which will cause serious damage to the fuel injector and nozzle to break and cause damage to the engine.

⚠ When installing the injector on the engine, please carefully check the components related to the installation of the injector, such as the injector pressure plate, screw, injector rod and other accessories are not deformed, and install it in strict accordance with the operation steps of the engine maintenance manual.

A It is forbidden to operate the bare injector for a long time in an environment with serious dust pollution and corrosion to iron products.

A It is forbidden to operate the bare injector for a long time in a strong magnetic field environment.

2.4.0445110059 Injector 's Reasons for Not Working Normally

- (1) There is air in the oil circuit of the engine fuel system.
- (2) Vehicle oil pump oil supply system is not normal.
- (3) Engine common rail system oil leakage or pressure limiting valve damage.
- (4) There is a short circuit, cutting out and poor contact in the wiring harness connected to the fuel

Mob/WhatsApp: +86 13410541523 Tel: +8675523215133
Email: ruby@shumatt.com Website: www.shumatt.com



injector of the vehicle.

- (5) The long-term placement of the injector causes the anti-rust oil to solidify, and the internal components are stuck or the oil holes are blocked.
- Before installing, carefully check whether other components in the common rail system except the fuel injector is damaged so as to prevent the fuel injector from not working properly after being replaced.

-09300

2.5.0445110059 Injector 's Causes of Damage

- (1) Didn't operate properly according to engine maintenance manual during disassembly or installation, resulting in damage to the injector .
- (2) The fuel oil used for the vehicle does not meet the standard cause damage to the injector, such as: the water content in the fuel oil exceeds the standard, iron powder, aluminum powder, sulfide impurities exceed the standard, etc.
- (3) The engine is not regularly maintained according to the engine maintenance manual (please refer to the vehicle maintenance manual for the maintenance mileage). For example, failure to replace the lubricating oil of the engine system for a long time will cause abnormal wear of the engine, excessive exhaust gas volume or a large amount of carbon deposits inside the engine. The filter is not replaced during maintenance or the replaced filter cannot reach the original filter standard. all above reasons can cause damage to the injector.
- (4) The abrasion of the oil pump produces iron powder and aluminum powder enter the fuel injector and cause damage to the fuel injector.
- (5) The deformation and abrasion of fuel tank result in iron powder or aluminum powder entering the fuel injector and causing damage to the fuel injector.
- (6) The fuel injector is damaged due to replacement or adjustment of the relevant parts of the fuel injector. For example, the valve clearance does not meet the standard after the engine is repaired, the replacement or modification of the wiring harness connected to the injector fails to meet the original standard.
- (7) The engine is overheated and overloaded for a long time working results in damage to the fuel injector.
- (8) The injector will be damaged naturally at the end of its working life.
- (9) The injector is magnetized (injector parts' magnetic exceeded) causing the injector to not work properly.
- A Before replacing the fuel injector, please check the engine parts carefully according to the engine maintenance manual to avoid the fuel injector being damaged again after replacement.

2.6.0445110059 Injector's Technical Support Obtaining Methods

- (1) Injector Technical File, visit http://shumatt.com to get the technical File.
- (2) Injector Technical Videos

Facebook: Visit https://www.facebook.com/hison.li to get the technical videos, constantly follow can get more information.

YouTube: https://www.youtube.com/channel/UCByvYBx7VjV mAfxh Hu-aw to get the technical videos, constantly follow can get more information.

Shumatt: Visit http://shumatt.com to get the technical videos.

(3) Injector Information Query Software

TruckBook Parts EPC APP, Android/Apple App Store download and install, visit http://shumatt.com to get the download and installation tutorial

(4) Search The fuel injector test data through TruckBook Parts EPC APP.

3.0445110059 Injector's Purchase and Delivery

3.1.0445110059 Injector's Purchase Payment Terms

Payment Terms: T/T, PayPal, Alipay, WeChat

Please **c**ontact our salesmen for specific payment information.

Mob/WhatsApp: +86 13410541523 Tel: +8675523215133
Email: ruby@shumatt.com Website: www.shumatt.com

Shenzhen Shumatt Technology Co., Ltd

3.2.0445110059 Injector's Main Sales Markets

Injector main sales markets: Asia, Europe, North America, South America, Africa etc.

3.3.0445110059 Injector's Declaration Requirements

Shumatt can assist customers to provide the following documents for import customs clearance: contract, invoice, packing list, bill of lading, insurance policy, certificate of origin, etc.

3.4.0445110059 Injector's Shipping Ways

Destination in China areas: SF Express, Debon Express, the corresponding logistics company can be provided according to customer requirements in special cases.

Destinations out of China's areas: DHL, UPS, FedEx, TNT air, ocean or other shipping methods required by

3.5.0445110059 Injector's Lead time

Lead time: Send out within 3 – 7 working days after receiving payment (Except for special products and special cases).

3.6.0445110059 Injector's Logistics Time for Destination Out of China's Areas

DHL Logistics Time:

. 1000 m. 1000 m.

Country or Region of Departure	Hong Kong, China	Other Countries or Regions of Asia	Australia and New Zealand	Europe	America	Other Countries
China's Mainland	7 Days	7 Days	8 Days	8 Days	8-12 Days	7-10 Days

UPS Logistics Time: Country or Region of Departure: China's Mainland

Country of Destination	Estimated Arrival Time	Country of Destination	Estimated Arrival Time	Country of Destination	Estimated Arrival Time
Japan	3 Days	UK	5-7 Days	Egypt	5-7 Days
Turkey	5-7 Days	Singapore	3 Days	Switzerland	5-7 Days
Bahrain	5-7 Days	Latvia	7-10 Days	New Zealand	7-10 Days
Sri Lanka	5-7 Days	Thailand	3 Days	Austria	5-7 Days
Romania	5-7 Days	Vietnam	3-5 Days	Estonia	5-7 Days
Malaysia	3-5 Days	Israel	5-7 Days	Mexico	7-10 Days
France	5-7 Days	America	5-7 Days	United Arab Emirates	5-7 Days
Italy	5-7 Days	Netherlands	5-7 Days	Bengal	7-10 Days
Lebanon	5-7 Days	Philippine	3-5 Days	Greece	7-10 Days
South Korea	3 Days	Spain	5-7 Days	Myanmar	5-7 Days
Canada	5-7 Days	Germany	5-7 Days	Saudi Arabia	7-10 Days
Portugal	5-7 Days	Australia	5-7 Days	South Africa	7-10 Days
Denmark	5-7 Days	Belgium	5-7 Days	Ukraine	7-10 Days
Show India Show	7-10 Days	Qatar	7-10 Days	Poland	5-7 Days
Indonesia	3-5 Days	Morocco	7-10 Days	Pakistan	7-10 Days
Kuwait	7-10 Days				

The logistics time is for reference only, subjects are according to the actual arrival.

3.7.0445110059 Injector's Packing **Domestic express packaging:** Usually wrapped in waterproof scotch tape, such as picture No.2.

International express packaging: Wrapped with waterproof yellow tape After wrapping the black protective film, such as picture No. 3.

Mob/WhatsApp: +86 13410541523 Tel: +8675523215133 Email: ruby@shumatt.com Website: www.shumatt.com

Pallet Shipping: Use fumigation free and recycling trays that meet export requirements, and use white wrapping protective film to wrap and bind with cable ties for the outside, such as picture No. 4, Also, the products can be packaged according to customers' requirements.

The packing tray is made of plastic and can be recycled.

Transparent tape, yellow tape, black wrapping protective film, white wrapping protective film are non SHIP degradable materials, please dispose of them properly.

Minors are prohibited from using transparent tape, yellow tape, black wrapping protective film, and white wrapping protective film to avoid personal injury.



Pic No. 2 Domestic express packaging: Wrapped by Transparent tape black protective film



Pic No. 3 International express packaging: Wrapped with yellow tape after wrapping



Pic No. 4

Pallet Shipping: Use pallet that meet export requirements, and use white wrapping protective film to wrap and bind with cable ties

4.0445110059 Injector's Storage Standard

(1) Choose a suitable storage place

 $\mu \beta^{(2)}$

and the later

The warehouse and cargo yard where the fuel injector is stored should be kept clean and dry, and away from the factory buildings that generate harmful gases and dust; do not mix with acids, alkalis, salts and other substances; the storage place should have a good drainage system; the cargo yard should be flattened with gravel or furnace ash etc. to enhance the water permeability of the surface layer to keep the reservoir area dry.

(2) Strict requirements of warehousing

Strict inspections should be carried out when the fuel injectors are put into storage, the surface

Mob/WhatsApp: +86 13410541523 Tel: +8675523215133 Website: www.shumatt.com

Email: ruby@shumatt.com

cleaning work should be done well to remove water traces, oil stains, ash and other dirt, remove the rust and do anti-rust treatment in time. Packaged injectors must be protected from damage.

(3) Keep the warehouse dry and preventing moisture

The relative humidity is usually below 70% for the fuel injectors placed in the room, and the corrosion of the fuel injectors is significantly reduced.

Injectors must be stored in the warehouse, and they are forbidden to store in the same warehouse with commodities with high water content.

(4) Stack Properly

After the injector is exposed to rain, the corrosion rate will increase significantly. The purpose of sealing is to isolate the injector from rainwater and humid air, so the warehouse window should be checked in time to avoid rainwater entering the warehouse

If the fuel injector package is damaged, it should be repaired or replaced; when the package is damp, the packaging material should be dried; if the original anti-corrosion and oil applied at the factory is found to be damaged or dried up, it should be cleaned and re-applied oil in time.

- It is forbidden to leave the injector exposed in the air for a long time.
- ▲ It is forbidden to store acids, alkalis, salts and other substances together with the injector.
- ▲ The unpacked fuel injector must be rust-proof during secondary storage.

5. Company Information



5.1. Company Introduction

Chinese Name: 深圳市舒马特科技有限公司 English Name: Shenzhen Shumatt Technology Co., Ltd

Mob Phone/WeChat: +86-13410541523

HK Telephone: +852-67653519

Telephone: +86-755-23215133

Email: ruby@shumatt.com

Website: www.shumatt.net

Shenzhen Office: 11-12, Floor 14, Building 13, Qinchengda Building, Exit A, Honglang North Subway Station, Bao'an District, Shenzhen, China's Mainland

Shenzhen Office: Room 428-430, Building B, Huafeng Zhigu Technology Industrial Park, Exit B, Fuyong

Mob/WhatsApp: +86 13410541523 Email: ruby@shumatt.com

© 2022 Shenzhen Shumatt Technology Co., Ltd

13 / 14

Tel: +8675523215133

Website: www.shumatt.com



Metro Station, Bao'an District, Shenzhen, China's Mainland

Hong Kong Office: Jianfa Street Industrial Zone, Tuen Mun, New Territories, Hong Kong, China

After-sales Service Address: Please contact our salesmen to obtain and provide the corresponding product maintenance reasons (Reference: 1.10. 0445110059 Injector Warranty Instructions)

5.2. Salesmen's Contact Information

No.	Name	WeChat/ WhatsApp	Email	Facebook	YouTube				
1	Ruby	+86-13410541523	ruby@shumatt.com	Hison Li	Hison Li				
2	lvy	+86-18025309821	sales@shumatt.com	Ivy Shumatt	Shumatt IVY				
3	Rebecca	+86-18025349821	sales01@shumatt.com	Rebecca SHUMATT	SHUMATT Rebecca				
4	Janny	+86-18028749821	sales02@shumatt.com	Janny shumatt	Janny Shumatt				
5.7	Sam	+86-13316859821	Sales8@shumatt.com	Shumatt Sam	Sam Shumatt				
6	Natalie	+86- 18938945856	sales15@shumatt.com	Shumatt Natalie	Lin Natalie				
7	Ada	+86-1342286353	sales5@shumatt.com	Shumatt Ada	Ada Shumatt				
8	Hison Li	+86-18318811871	web@shumatt.com	Hison Li	Hison Li				
9	Mecca	+86-18938948618	sales11@shumatt.com	Shumatt Mecca	Shumatt Mecca				
10	Eric	+86 18319033618	sales3@shumatt.com						
11 . v. vii	Wayne (Joaquín en español)	+86-13316959821	wayne@shumatt.com	shumattwayne	Wayne Shumatt				
12	Sylvia	+86 18312499884	sales6@shumatt.com	24. 24.	\$1. \$1.				
	Visit http://shumatt.com to obtain the latest information of salesmen								
	ati ati ati	PS: Shumatt's salesmen's en	mails are all end with @shumatt.com	d with	. The The				

6. Copyright Statement

The copyright of any contents (including but not limited to parameters, data, text, charts, images, sounds or videos, etc.) provided in "0445120219 Injector CRIN2-16 Technical File" belong to Shenzhen Shumatt Technology Co., Ltd. Without the prior written permission of Shenzhen Shumatt Technology Co., Ltd., you are not allowed to modify any contents in "0445120219 Injector CRIN2-16 Technical File" in any way. At the same time, any conditions to spread, repost, display the contents of "0445120219 Injector CRIN2-16 Technical File" should indicate that the cited article is from Shenzhen Shumatt Technology Co., Ltd., Any actions failure to follow above conditions to use "0445120219 Injector CRIN2-16 Technical File" will violate the "Copyright Law of the People's Republic of China" and other laws and regulations and the provisions of relevant international conventions.



Mob/WhatsApp: +86 13410541523 Tel: +8675523215133
Email: ruby@shumatt.com Website: www.shumatt.com