









SHUMATI

SHIDAT

0445110111 Injector CRI1-MI Technical File

Stand
1.0445110111 Injector's Introduction
1.1. 0445110111 Injector's Basic Information
1.2. 0445110111 Injector's Common Part Number
1.3.0445110111 Injector's Matching Information
1.4.0445110111 Injector's Parameter
1.5.0445110111 Injector's Specifications and Dimensions
1.6. 0445110111 Injector's Quality Control
1.6. 0445110111 Injector's Quality Control
1.8.0445110111 Injector's Packing List and Package Size
1.9.0445110111 Injector's Testing Standard and Certificate
1 10 0445110111 Injector's Warranty Instructions
1.10.0445110111 Injector's Manufacturer
2.0445110111 Injector Technical Support
2.1.0445110111 Injector's Part Number Location
2.2.0445110111 Injector's Application Scenarios
2.3.0445110111 Injector's Installation
2.4. 0445110111 Injector 's Reasons for Not Working Normally
2.3.0445110111 Injector's Installation 10 2.4. 0445110111 Injector 's Reasons for Not Working Normally 11 2.5. 0445110111 Injector 's Causes of Damage 11
2.6.0445110111 Injector's Technical Support Obtaining Methods
3.0445110111 Injector's Purchase and Delivery12
3.1.0445110111 Injector's Purchase Payment Term12
3.2.0445110111 Injector's Main Sales Markets12
3.1.0445110111 Injector's Purchase Payment Term 12 3.2.0445110111 Injector's Main Sales Markets 12 3.3.0445110111 Injector's Declaration Requirements 12
3.4.0445110111 Injector's Shipping-Ways
3.5.0445110111 Injector's Lead time
3.6.0445110111 Injector's Logistics Time for Destination Out of China's Areas
3.7.0445110111 Injector's Packing
4.0445110111 Injector's Storage Standard14
5. Company Information:
5.1. Company Introduction
5.2. Sales-men's Contact Information
. 24 24 24 24 24 24 24 24 24 24 24 24.
SHARAL SHERAL SH
SAVERAL, SA

Mob/WhatsApp: +86 13410541523 Email : <u>ruby@shumatt.com</u> © 2022 Shenzhen Shumatt Technology Co., Ltd

The The The Arts and The Arts

. and

Tel: +8675523215133 Website : www.shumatt.com

Then Then Street .

SHUMFITT Shenzhen Shumatt Technology Co., Ltd

0445110111 Injector CRI1-MI Technical File

SHIPE

1.0445110111 Injector's Introduction

Street Street Street -de^{ga} 1.1. 0445110111 Injector's Basic Information

and Titles of an	China made new high quality diesel injector 0445110111 fuel injector CRI1-MI
SKU 1	G1W20445110111
SKU 2	and a start a
Ster St. St.	- 92° 92° 92° 92° 92° 92° 93° 92° 92° 92° 92°

1.2. 0445110111 Injector's Common Part Number

(1) Injector's Exc	change Information	and a state of the	18 ^{47, 1} -19.918
20 20	Injector Part Number	Re-manufactured Part Number	280.1
at at	0445110111	0 986 435 081	
		. <u>861 - 861 - 861 - 861 -</u>	

(2) Injector's Application Information

ALFA ROMEO Car Model	FIAT	LANCIA	
55193808	73503097	55192534	31° - 31°
73503097	55192534	73503097	
55192534	55192489	55193808	Street St
~ ~ ~	55190808		~ ~
200 - 512-00 - 512- 512- 512	55193808	all all al	and all all
	0000073503097		
55192534	55192489	55192534	and all all
55193808	55193808	73503097	20 20
73503097	73503097	55193808	and water is
	0000073503097	347 SYL SYL SYL	\$1° \$1
and a state of the state of the state	71791264	The The second	The Trees
etter stor sto	55192534	ston ston ste	an an
10 m m	71793564	in in i	in the
	55193808 73503097 55192534 55192534 55192534 55193808 73503097	55193808 73503097 73503097 55192534 55192534 55192489 55192534 55190808 55193808 55193808 55192534 55193808 0000073503097 0000073503097 55192534 55192489 55192534 55192489 55193808 55193808 73503097 73503097 0000073503097 0000073503097 71791264 55192534 55192534 55192534	55193808 73503097 55192534 73503097 55192534 73503097 55192534 55192489 55193808 55192534 55190808 55192534 55193808 55192534 55193808 55192534 55193808 0000073503097 55192534 55192489 55192534 55192534 55192489 55192534 55193808 55193808 73503097 73503097 73503097 55193808 73503097 73503097 55193808 60000073503097 55193808 73503097 73503097 73503097 55193808 60000073503097 55193808 6 71791264 55192534 55192534

(3) Injector's Part Number Common Writing

0445110111, 0986435081, 0445 110 111, 0986 435 081, 0445 110111, 0986 435081, 2,519 0 445110111, 0 986435081, 0445 110 111, 0986 435 081, 0445110 111, 0986435 081, 0445 110111, 0986 435081, 55192489, 55193808, 73503097, 55192534, 55190808, 71791264, 71793564 $\mathbb{R}^{\mathbb{N}^{2^{N}}}$ -3^{3} $\mathbb{S}^{[0]}$

1.3.0445110111 Injector's Matching Information

_	1.3.	0445110)111 Inj	ector's	Matching I	nforma	tion	19 ⁵⁷ - 13	art . art	- 515 ⁻⁵	all in a	. 115 ⁵⁵
	vehicle brand	Series	Car Model	Engine Model	Production date	Power (KW)	emission standard	Horse power	Manufacturer	Emission	Cylinder	Power Source (V)
	241	241	24.1	24.4	2010	20	200	24.6	201 3	51 - 24		20

Mob/WhatsApp: +86 13410541523 Email : ruby@shumatt.com © 2022 Shenzhen Shumatt Technology Co., Ltd

and Ch

- 10⁹⁷⁵

			-								
ALFA ROM EO	147 [937]	147 1.9 JTD M 16V	937 A.40 00	06/2003 - 09/2006	93 kW	126 PS	/	/	/	4	12
ALFA ROM EO	147 [937]	147 1.9 JTD M 16V	192 B1.0 00	02/2004 - 12/2005	100 kW	136 PS	/	/	1	4	12
ALFA ROM EO	147 [937]	147 1.9 JTD M 16V	192A 5000	10/2002 - 09/2003	103 Kw	140 PS	/	/	1	4	12
ALFA ROM EO	147 [937]	147 1.9 JTD M 16V	937 A5.0 00	10/2004 - 02/2006	110 kW	150 PS	/	/	1	4	12
ALFA ROM EO	156 [932] Berli na	156 1.9 JTD 16V	937 A4.0 00	06/2003 - 10/2005	93 kW	126 PS	/	/	/	4	12
ALFA ROM EO	156 [932] Berli na	156 1.9 JTD 16V	192 B1.0 00	10/2004 - 10/2005	100 kW	136 PS	/	/	/	4	12
ALFA ROM EO	156 [932] Berli na	156 1.9 JTD 16V	192 A5.0 00	10/2002 - 10/2005	103 kW	140 PS	/	/	/	4	12
ALFA ROM EO	156 [932] Spor twag on	156 1.9 JTD Spor twag on	937 A4.0 00	06/2003 - 10/2005	93 kW	126 PS	/	/	1	4	12
ALFA ROM EO	156 [932] Spor twag on	156 1.9 JTD Spor twag on	192 B1.0 00	10/2004 - 10/2005	100 kW	136 PS	/	/	1	4	12
ALFA ROM EO	156 [932] Spor twag on	156 1.9 JTD Spor twag on	192 A5.0 00	10/2002 - 12/2005	103 kW	140 PS	/	/	1	4	12

Mob/WhatsApp: +86 13410541523 Email : <u>ruby@shumatt.com</u> © 2022 Shenzhen Shumatt Technology Co., Ltd

5	<u>HUII</u>		S ł	nenzher	۱ Shur	natt Te	chnol	ogy Co., Li	td		
ALFA ROM EO	156 [932] Spor twag on	156 1.9 JTD Spor twag on Q4	937 A5.0 00	07/2004 - 12/2005	110 kW	150 PS	/	/	/	4	12
ALFA ROM EO	156 [932] Berli na	156 2.4 JTD	841 G.00 0	06/2003 - 10/2005	129 kW	175 PS	/	/	/	5	12
ALFA ROM EO	156 [932] Berli na	156 2.4 JTD 20V	841 M.00 0	10/2004 - 10/2005	120 kW	163 PS	/	/	/	5	12
ALFA ROM EO	156 [932] Spor twag on	156 2.4 JTD Spor twag on	841 M.00 0	10/2004 - 10/2005	120 kW	163 PS	/	/	/	5	12
ALFA ROM EO	156 [932] Spor twag on	156 2.4 JTD Spor twag on	841 G.00 0	06/2003 - 12/2005	129 kW	175 PS	1	/	1	5	12
ALFA ROM EO	166 [936]	166 2.4 JTD 20V	841 M.00 0	10/2004 - 10/2007	120 kW	163 PS	/	/	/	5	12
ALFA ROM EO	166 [936]	166 2.4 JTD 20V	841 N.00 0	10/2004 - 10/2007	128 kW	175 PS	/	/	/	5	12
ALFA ROM EO	166 [936]	166 2.4 JTD 20V	841 G.00 0/84 1 H.00 0	06/2003 - 10/2007	129 kW	175 PS	/	/	/	5	12
ALFA ROM EO	GT [937]	GT 1.9 JTD 16V	937 A5.0 00	10/2003 - 12/2010	110 kW	150 PS	/	/	/	4	12
FIAT	Stilo '04 [192]	Stilo 1.9 JTD 16V	937 A4.0 00	01/2004 - 12/2007	93 kW	126 PS	/	1	1	4	12
- 15	197 ⁵ - 1			. at ^{ist} . a	68 ^{63 4}	de ^{r s} a	19 ⁵¹ . 1	mar mart			all in the second se

Mob/WhatsApp: +86 13410541523 Email : <u>ruby@shumatt.com</u> © 2022 Shenzhen Shumatt Technology Co., Ltd

								067 CO., L			
FIAT	Stilo '04 [192]	Stilo 1.9 JTD 16V	192 B1.0 00	01/2004 - 12/2007	100 kW	136 PS	/	/	/	4	12
FIAT	Stilo '04 [192]	Stilo 1.9 JTD 16V	192 A5.0 00	01/2004 - 12/2007	103 kW	140 PS	/	/	/	4	12
FIAT	Stilo Mult i Wag on [192]	Stilo 1.9 JTD 16V S.W.	937 A4.0 00	09/2004 - 12/2007	93 kW	126 PS	/	/	1	4	12
FIAT	Stilo Mult i Wag on [192]	Stilo 1.9 JTD 16V S.W.	192 B1.0 00	09/2004 - 12/2007	100 kW	136 PS	/	/	/	4	12
FIAT	Stilo Mult i Wag on [192]	Stilo 1.9 JTD 16V S.W.	192 A5.0 00	01/2004 - 12/2007	103 kW	140 PS	/	/	/	4	12
LANC IA	Thesi s	Thesi s 2.4 JTD 20V	841 M.00 0	06/2003 - 02/2006	120 kW	163 PS	/	/	/	5	12
LANC IA	Thesi s	Thesi s 2.4 JTD 20V	841N .000	06/2003 - 02/2006	120 kW	163 PS	/	/	/	5	12
LANC IA	Thesi s	Thesi s 2.4 JTD 20V	841G .000	06/2003 - 02/2006	129 kW	175 PS	/	/	/	5	12
LANC IA	Thesi s	Thesi s 2.4 JTD 20V	841H .000	06/2003 - 02/2006	129 kW	175 PS	/	/	/	5	12

1.4.0445110111 Injector's Parameter

Adaptation System: Common Rail System

SPRINGER

Parameter Performance: CRI1-MI

Matching Accessories: /

Injector Type: Electromagnetic Injector

Mob/WhatsApp: +86 13410541523 Email : <u>ruby@shumatt.com</u> © 2022 Shenzhen Shumatt Technology Co., Ltd

Support System Maximum Pressure: 1400 Vehicle Configuration Information: ALFA ROMEO/FIAT/LANCIA

55 15 C at 1 18 C -18 C -1.5.0445110111 Injector's Specifications and Dimensions

Injector Size: 21.5cm*4 cm *4 cm = 344cm³ (L*W*H=V) Injector Net Weight: 0.55kg Gross Weight: 0.6kg Injector Quality: China Made Brand New Package Size: 28cm*7 cm *7 cm = 1372 cm³ Injector Type: Diesel Common Rail Injector MOQ: 4 Pieces

1.6. 0445110111 Injector's Quality Control

(1) Injector Testing

d Gara

All injector spare parts are tested for electrical characteristics, accuracy, high temperature, low temperature, withstand voltage, leakage, durability, and various working conditions.

(2) Injector Assembling

And the quality control of the injector production and installation process, our company strictly follows the standard product installation data and product installation steps to install, such as injector stroke test, injector solenoid valve tightening torque, injector nozzle tightening torque,

(3) Injector Inspection

Strates -

The factory inspection of the injector is undergone full inspection, random inspection, and batch inspection three inspections. Different brands of test benches are used to test the same fuel injector for a total of no less than three times for factory inspection, and the fuel injector installation testing environment are progressed in dust-free workshop.

1998 - Car 1.7. 0445110111 Injector's Customized Service

(1) Injector's Customized Service: Meet the customized needs of OEM manufacturers for shell lettering, logo engraving, injector internal packaging, injector external packaging and labels customized, etc.

ai^{sta}

30.1					241	26.1	201	200
SHUMPET	and here	1201	1	ar a				1997 T 5192
	18 C	100		and the second se			188 140 (H.1H 1 (H.H.H 1 (H.H.H.) 100 (H.H.) 100 (H.H.)	
SHUDEL	si ⁿⁱ	50 °		0.0				st ^a
	Injector nozzle engraving	15	Injector hous and QR		Injector	box and I	abel	15 ⁵

(2) Injector's Customized Service Requirements:

The purchased of customized injector are not less than 10 pieces.

Customized injector packages no less than 1000 pieces.

Customized products involve the need of specify logo, the OEM manufacturer needs to provide trademark authorization and the sample of logo image file.

A Once the customized fuel injector is sold, it cannot be returned or exchanged if there is no quality problems.

Titter, Titter, Titter, Titter, Titter, Titter, Titter, Titter,

Mob/WhatsApp: +86 13410541523 Email : ruby@shumatt.com © 2022 Shenzhen Shumatt Technology Co., Ltd

1.8.044511011	1 Injector's Packing List and Pa	ckage Size			
(1) Injector	Spare Parts List	and and and	all all all as		
No.	1	2	3		
Silver Imager Martin		art and articlet	sa ¹⁰ O ¹ ati		
and and	5	Tomo and the			
Name	Fuel Injector	O-Ring	Gasket F 00V C17 503		
Description	Fuel injector part number: 0445110111	Ensure to meet the standard of the sealing performance between the injector and the engine	Made of brass, used to ensure the tight fit between the injector cap end and the engine		
No.	4	5	6		
SALIDAT SALID Image					
Name	Nozzle Protective Cover Cap	Injector House Protective Cover Cap	Solenoid Valve Protective Cap		
Description	Protect nozzle holes from being polluted and blocked	Protect oil inlet from being polluted and blocked	Protect the solenoid valve body and terminals from being damaged by external forces		
No.	7	8	9		
SAUDATT SAUDA Image SAUDATT SAUDA					
Name	VCI Anti-rust Bag	Bubble Bag	Injector Packing Box		
Description	Prevent fuel injector from rusting	Prevent the injector from being damaged by external forces	Place injector and injector accessories		

A Minors are forbidden to use the fuel injector assembly, O-ring, gasket, nozzle protective cover, fuel injector house protective cover, solenoid valve protective cover, VCI anti-rust bag, and air bubble bag to - 32,200 avoid personal injury.

• O-ring and gasket are disposable installation accessories, and need to be replaced for AND THE

re-installation, and a series and

200


A The nozzle protective cover, the injector house protective cover, and the solenoid valve protective cover are recyclable accessories that can be reused. and in 1 Ban 18 C.

VCI anti-rust bags and bubble bags are non-degradable materials, please dispose of them properly after using.

▲ The injector and the installation parts should be coated with appropriate sealing oil during installation.

(2) Injector Box Size

Mob/WhatsApp: +86 13410541523 Email:ruby@shumatt.com © 2022 Shenzhen Shumatt Technology Co., Ltd

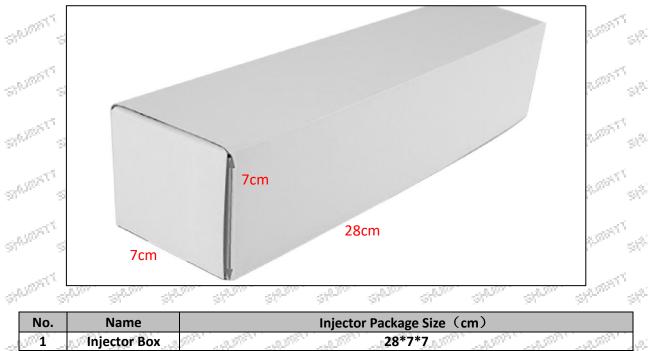

1.9.0445110111 Injector's Testing Standard and Certificate

We can provide the factory quality inspection test report of each injector to ensure that each injector delivered meets the engine performance indicators.

		un Maria	T SHERAT SHERAT SHERAT SHERAT SHERAT SHERAT SHERAT SHERAT
BOTEN	测试报告	4.05.2019 10:42:09	T SHARATT SHARATT SHARATT SHARATT SHARATT SHARATT SHARATT SHARATT
录伸企业:			
电话:	地址: 松湖人:		States States States States States States States States States
900 B10:			Stream stores, stores, stores, stores, stores, stores, stores,
518. 9 4 .	送检单位。 客户姓名:		
996: (時間))(注:			A A A A A A A A
2011名标: @###			STATIST STATIST STATIST' STATIST' STATIST' STATIST' STATIST' STATIST'
2号-零件号:			84. 34. 34. 34. 34. 34. 34. 24. 27. 27.
ila:			
152118-1579 - C060403-6511	检测结果		STREAM STREAM STREAM STREAM STREAM STREAM STREAM STREAMS
ND K (SCH M) LEAK TEST: 32	1930628 REEKORD	0 809⊼608 302±14 ✓	Strand, Strand, Strand, Strand, Strand, Strand, Strand, Strand,
Bade: 3.0 WRFM: 3.0	+ 757 147.5±145 C5	4884298 V	
Maar 2015 Tu: 284	218.5±144 03 350±85 03	·····z···· V	STREAM STREAM STREAM STREAM STREAM STREAM STREAM STREAM STREAM
NG NG NG AP	11.0±48 03 43±18 03	¥	SPRINT SPRINT SPRINT SPRINT SPRINT SPRINT SPRINT
0033			SHARATT SHARATT SHARATT SHARATT SHARATT SHARATT SHARATT SHARATT
11	:d;		i an ar ar ar ai ai ai an
100	1		
anti .	55 - C	and a con	T a man

1.10.0445110111 Injector's Warranty Instructions

(1) . Product Warranty Conditions and Instructions

It is necessary to provide pictures, videos, or test reports detected by the injector inspection equipment when the injector is abnormal during use as evidence to feed back to the salesman.

di.

Abnormal conditions are properly explained such as: 1.Smoke, 2. Engine shake, 3. Difficulty starting the engine, 4. Engine noise, 5. oil leakage etc.

The The Area and

(2) . Injector Warranty Coverage

Mob/WhatsApp: +86 13410541523 Email : <u>ruby@shumatt.com</u> © 2022 Shenzhen Shumatt Technology Co., Ltd

Tel: +8675523215133 Website : www.shumatt.com

ant and anti-

Within 15 days after customer receives the 0445110111 injector, if there is a performance failure and the product has no appearance damage, customer can choose to replace it or repair it;

If the 0445110111 injector has performance problems during the warranty period (3 months), and it is confirmed that it is product's problems after testing, you can contact our salesmen to replace the same model or a reworked product with the same performance for free;

If the injector house has obvious scratches, it can only be repaired and it will be returned as it is if the Store. product is confirmed to be fault-free.

▲ Tips: For products not covered by warranty, our company can provide paid maintenance services. For products after paid repaired, the same performance problem will have a free warranty period within 3 $\leq 1^{2}$ months from the date of repairing.

(3) . Injector Out of Warranty Coverage

The warranty period has expired.

Stam. Injector failure caused by high temperature, high pressure, humidity, rain and snow, saline-alkali land, WERE'S WART'S earthquake, and used in abnormal environment.

Customer disassembles or repairs the injector personally resulting in damage to the injector.

Injector damage caused by man-made reasons (throwing, strong magnetic field magnetization, set fire). Injector failure or injector damage caused by non-injector design, technology, manufacturing, quality and other issues.

Injector failure due to system pressure exceeding system approved pressure.

Injector failure caused by system voltage exceeding approved voltage.

Injector failure caused by impurities (water, lead, aluminum powder, iron powder, sulfide) in the system SHARE fuel exceeding the standard requirements. 37.50

Injector failure caused by not installing according to the tightening torque specified in the vehicle engine and the maintenance manual (the tightening torque is too large or too small).

Injector failure caused by not following the installation angle specified in the vehicle engine maintenance manual. 43. - C

Injector failure caused by not following the cleaning requirements specified in the vehicle engine maintenance manual.

Injector failure caused by failure to replace consumable parts as specified in the vehicle engine maintenance manual.

Injector failure caused by not complying with the intake system fit clearance and exhaust system fit clearance requirements specified in the vehicle engine maintenance manual.

Failure to replace the consumable parts and the fitting clearance of the oil inlet system pipeline and the fuel injector connection in accordance with the fuel intake system specified in the vehicle engine maintenance manual.

1.11.0445110111 Injector's Manufacturer

Injector's manufacturer: Shenzhen Shumatt Technology Co., Ltd

2.0445110111 Injector Technical Support

STATE . 199¹⁷ and C ast C 100 2.1.0445110111 Injector's Part Number Location


1) E.g.: The injector part number see as follows . 1997 -

Mob/WhatsApp: +86 13410541523 Email:ruby@shumatt.com © 2022 Shenzhen Shumatt Technology Co., Ltd

Shenzhen Shumatt Technology Co., Ltd No. Name A brand, logo, part number, series number B nozzle part number

2.2.0445110111 Injector's Application Scenarios

Common rail system is an oil supply method refers to the diesel oil from the fuel tank sucked out by the gear pump through the oil-water separator and the gear pump to diesel fine filter, high-pressure pump, common rail pipe, and fuel injector, all together with the closed-loop fuel supply system composed of sensors and ECU that completely separates the generation of injection pressure and the injection process from each other.

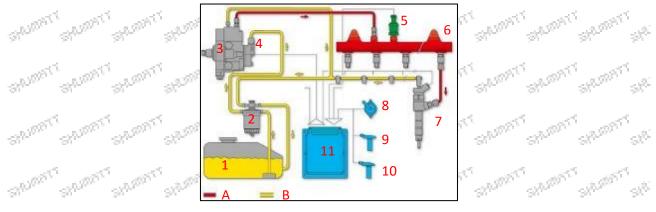

	5 25 2	6	Pic Pic	: No. 1		15	15 N.
No.	Name	No.	Name	No.	Name	No.	Name
1	Tank	c ⁵ _	Common Rail Pressure Sensor	9	Engine Crankshaft Sensor	A	High Pressure Oil Circuit
2	Diesel Filter	6	Common Rail Pipe	10	Camshaft Sensor	B	Low Pressure Oil Circuit
3	High-Pressure Pump	ر ۲	Injector	11	ECU Electronic Control Unit	1700	The The
4	Fuel Gear Pump	- 8	Accelerator Pedal	all and a second	all all all	e de	l'all'all

2.3.0445110111 Injector's Installation

(1) .0445110111 Injector's Installation Precautions:

▲ The replacement of the fuel injector must strictly follow the electrical system, the approved pressure of the low-pressure fuel intake system, the approved pressure of the high-pressure fuel circuit system, and fuel system replacement consumables requirements (including the low-pressure fuel circuit system filter and the high-pressure fuel circuit) specified in the vehicle engine maintenance manual,

5²⁰

A Replacement of wearing parts of the fuel system, cleaning requirements for the connection between the fuel system and the injector, the fitting clearance of the fuel injector connection, the installation angle and tightening torque of the injector, the fitting clearance of the intake system, and the fitting clearance of the exhaust system to ensure the service life of the engine and the normal operation of the injector.

▲ When installing the fuel injector on the engine, it is necessary to clean the engine block, cylinder head and other parts connected to the fuel injector, and ensure that there is no dust, carbon deposits, water, rust spots, etc.

Mob/WhatsApp: +86 13410541523 Email : <u>ruby@shumatt.com</u> © 2022 Shenzhen Shumatt Technology Co., Ltd

▲ Before installing, check whether the fuel injector nozzle gasket has been replaced and installed on the fuel injector.

When installing the fuel injector, apply lubricant between the fuel injector, fuel nozzle sealing gasket and O-ring.

▲ Without replacing new gasket can lead to: deformation of the tight cap of nozzle, deformation of nozzle, deformation of nozzle, oil leakage and air leakage, which will cause serious damage to the fuel injector and nozzle to break and cause damage to the engine.

▲ When installing the injector on the engine, please carefully check the components related to the installation of the injector, such as the injector pressure plate, screw, injector rod and other accessories are not deformed, and install it in strict accordance with the operation steps of the engine maintenance manual.

▲ It is forbidden to operate the bare injector for a long time in an environment with serious dust pollution and corrosion to iron products.

▲ It is forbidden to operate the bare injector for a long time in a strong magnetic field environment.

2.4. 0445110111 Injector 's Reasons for Not Working Normally

(1) There is air in the oil circuit of the engine fuel system.

(2) Vehicle oil pump oil supply system is not normal.

(3) Engine common rail system oil leakage or pressure limiting valve damage.

(4) There is a short circuit, cutting out and poor contact in the wiring harness connected to the fuel injector of the vehicle.

(5) The long-term placement of the injector causes the anti-rust oil to solidify, and the internal components are stuck or the oil holes are blocked.

Before installing, carefully check whether other components in the common rail system except the fuel injector are damaged so as to prevent the fuel injector from not working properly after being replaced.

2.5. 0445110111 Injector 's Causes of Damage

(1) Didn't operate properly according to engine maintenance manual during disassembly or installation, resulting in damage to the injector .

(2) The fuel oil used for the vehicle does not meet the standard cause damage to the injector, such as: the water content in the fuel oil exceeds the standard, iron powder, aluminum powder, sulfide impurities exceed the standard, etc.

(3) The engine is not regularly maintained according to the engine maintenance manual (please refer to the vehicle maintenance manual for the maintenance mileage). For example, failure to replace the lubricating oil of the engine system for a long time will cause abnormal wear of the engine, excessive exhaust gas volume or a large amount of carbon deposits inside the engine. The filter is not replaced during maintenance or the replaced filter cannot reach the original filter standard. all above reasons can cause damage to the injector.

(4) The abrasion of the oil pump produces iron powder and aluminum powder enter the fuel injector and cause damage to the fuel injector.

(5) The deformation and abrasion of fuel tank result in iron powder or aluminum powder entering the fuel injector and causing damage to the fuel injector.

(6) The fuel injector is damaged due to replacement or adjustment of the relevant parts of the fuel injector. For example, the valve clearance does not meet the standard after the engine is repaired, the replacement or modification of the wiring harness connected to the injector fails to meet the original standard.

(7) The engine is overheated and overloaded for a long time working results in damage to the fuel injector.

(8) The injector will be damaged naturally at the end of its working life.

(9) The injector is magnetized (injector parts' magnetic exceeded) causing the injector to not work properly. A Before replacing the fuel injector, please check the engine parts carefully according to the engine maintenance manual to avoid the fuel injector being damaged again after replacement. $S^{(r)}$

2.6.0445110111 Injector's Technical Support Obtaining Methods

(1) Injector Technical File, visit http://shumatt.com to get the technical file.

(2) Injector Technical Videos

18⁵ 1200 de Sta 18 C -Facebook: Visit https://www.facebook.com/hison.li to get the technical videos, constantly follow can get more information.

YouTube: https://www.youtube.com/channel/UCByvYBx7VjV_mAfxh_Hu-aw_to get the technical videos, constantly follow can get more information.

Shumatt: Visit <u>http://shumatt.com</u> to get the technical videos.

(3) Injector Information Query Software

TruckBook Parts EPC APP, Android/Apple App Store download and install, visit http://shumatt.com to get REPRESE A.F.F.T. the download and installation tutorial

(4) Search The fuel injector test data through TruckBook Parts EPC APP.

3.0445110111 Injector's Purchase and Delivery

01575 ast. 18⁵⁵ 19 C -150 **3.1.**0445110111 Injector's Purchase Payment Term

Payment Terms: T/T, PayPal, Alipay, WeChat

Please contact our salesmen for specific payment information.

3.2.0445110111 Injector's Main Sales Markets

120 Injector main sales markets: Asia, Europe, North America, South America, Africa etc.

3.3.0445110111 Injector's Declaration Requirements

an^{rth} and water Shumatt can assist customers to provide the following documents for import customs clearance: contract, invoice, packing list, bill of lading, insurance policy, certificate of origin, etc.

and and and 3.4.0445110111 Injector's Shipping Ways

Destination in China areas: SF Express, Debon Express, the corresponding logistics company can be provided 31⁰⁰⁰¹ according to customer requirements in special cases.

Destinations out of China's areas: DHL, UPS, FedEx, TNT air, ocean or other shipping methods required by customers.

3.5.0445110111 Injector's Lead time

Lead time: Send out within 3 – 7 working days after receiving payment (Except for special products and special cases).

Themes Themes Themes Themes Themes

The The The The The The 18 C. 18 C -3.6.0445110111 Injector's Logistics Time for Destination Out of China's Areas

DHL Logistics Time :

Mob/WhatsApp: +86 13410541523 Email : ruby@shumatt.com © 2022 Shenzhen Shumatt Technology Co., Ltd

Shenzhen Shumatt Technology Co., Ltd										
Country or Region of Departure		Hong Kong, China		Other Countries or Australia and Regions of Asia Zealand		New	Europe	America	Other Countries	
China's Mainland		7 Days		7 Days	8 Days		8 Days	8-12 Days	7-10 Days	
UPS Logistics Tin	ne:	Country	or R	egion of Departur	e:	China's Ma	inland	e na	6 ¹⁵ - 18	r an .
Country of Destination	•		Country of Destination			Estimated Arrival Time	Country of Decti		nation	Estimated Arrival Time
Japan	3 [Days	65	UK ST		5-7Days	ч. 	Egypt	55	5-7 Days
Turkey	5-7	Days		Singapore	0	3 Days	Sher	Switzerland	a Star	5-7 Days
Bahrain	5-7 Days		Latvia			7-10 Days	New Zealand		7-10 Days	
Sri Lanka	5-7	Days	, ¹⁹	Thailand	ę.J	3 Days	ST 150	Austria	3.1°	5-7 Days
Romania	5-7 Days		Vietnam			3-5 Days	Estonia		-	5-7 Days
Malaysia	3-5 Days		Israel		23	5-7 Days	Mexico		7-10 Days	
France	5-7	Days		America	1	5-7 Days	Uni	ted Arab Em	irates	5-7 Days
Italy	5-7	Days		Netherlands	. 1	5-7 Days	1 2	Bengal	s ^{ri} . di	7-10 Days
Lebanon	5-7	Days		Philippine	1	3-5 Days	55	Greece	Sec.	7-10 Days
South Korea	3 [Days	5	Spain		5-7 Days	ť	Myanmar	-5	5-7 Days
Canada	5-7	Days		Germany	ę.	5-7 Days	3100	Saudi Arabi	a 🛪 🔊	7-10 Days
Portugal	5-7 Days		Australia			5-7 Days	South Africa		a	7-10 Days
Denmark	5-7	Days	9 ⁶	Belgium	e)	5-7 Days	all all	Ukraine	3.9	7-10 Days
India	7-10 Days		Qatar			7-10 Days	Poland			5-7 Days
Indonesia Kuwait	200	Days) Days	and a	Morocco	e.	7-10 Days		Pakistan	er and	7-10 Days

The logistics time is for reference only, subjects are according to the actual arrival.

3.7.0445110111 Injector's Packing

Domestic express packaging: Usually wrapped in waterproof scotch tape, such as picture No.2. **International express packaging:** Wrapped with waterproof yellow tape After wrapping the black protective film, such as picture No. 3.

Pallet Shipping: Use fumigation free and recycling trays that meet export requirements, and use white wrapping protective film to wrap and bind with cable ties for the outside, such as picture No. 4,

also, the products can be packaged according to customers' requirements.
 The packing tray is made of plastic and can be recycled.

A Transparent tape, yellow tape, black wrapping protective film, white wrapping protective film are non-degradable materials, please dispose of them properly.

Minors are prohibited from using transparent tape, yellow tape, black wrapping protective film, and white wrapping protective film to avoid personal injury.



Mob/WhatsApp: +86 13410541523 Email : <u>ruby@shumatt.com</u> © 2022 Shenzhen Shumatt Technology Co., Ltd Tel: +8675523215133 Website : www.shumatt.com

SPREASE

 $\mathcal{G}^{(i)}$



Pallet Shipping: Use pallet that meet export requirements, and use white wrapping protective film to wrap and bind with cable ties and and a start and the

4.0445110111 Injector's Storage Standard

(1) Choose a suitable storage place

1795 The warehouse and cargo yard where the fuel injector is stored should be kept clean and dry, and away from the factory buildings that generate harmful gases and dust; do not mix with acid, alkali, salt and other substances; the storage place should have a good drainage system; the cargo yard should be flattened with gravel or furnace ash etc. to enhance the water permeability of the surface layer to keep the reservoir area dry. $\otimes^{\mathbb{N}^{|\mathcal{G}|}}$ States.

(2) Strict requirements of warehousing

Strict inspections should be carried out when the fuel injectors are put into storage, the surface cleaning work should be done well to remove water traces, oil stains, ash and other dirt, remove the rust and do antirust treatment in time. Packaged injectors must be protected from damage.

(3) Keep the warehouse dry and preventing moisture

Mob/WhatsApp: +86 13410541523 Email:ruby@shumatt.com © 2022 Shenzhen Shumatt Technology Co., Ltd

Tel: +8675523215133 Website : www.shumatt.com 1.000 C

The relative humidity is usually below 70% for the fuel injectors placed in the room, and the corrosion of the fuel injectors is significantly reduced.

Injectors must be stored in the warehouse, and they are forbidden to store in the same warehouse with commodities with high water content.

(4) Stack Properly

After the injector is exposed to rain, the corrosion rate will increase significantly. The purpose of sealing is to isolate the injector from rainwater and humid air, so the warehouse window should be checked in time to avoid rainwater entering the warehouse

If the fuel injector package is damaged, it should be repaired or replaced; when the package is damp, the packaging material should be dried; if the original anti-corrosion and oil applied at the factory is found to be damaged or dried up, it should be cleaned and re-applied oil in time.

- **A** It is forbidden to leave the injector exposed in the air for a long time.
 - It is forbidden to store acid, alkali, salt and other substances together with the injector.
 - A The unpacked fuel injector must be rust-proof during secondary storage.

5. Company Information



Mob/WhatsApp: +86 13410541523 Email : <u>ruby@shumatt.com</u> © 2022 Shenzhen Shumatt Technology Co., Ltd

Email: ruby@shumatt.com

Website: www.shumatt.net

Shenzhen Office: 11-12, Floor 14, Building 13, Qinchengda Building, Exit A, Honglang North Subway Station, Bao'an District, Shenzhen, China's Mainland

Shenzhen Office: Room 428-430, Building B, Huafeng Zhigu Technology Industrial Park, Exit B, Fuyong Metro Station, Bao'an District, Shenzhen, China's Mainland

♥ Hong Kong Office: Jianfa Street Industrial Zone, Tuen Mun, New Territories, Hong Kong, China

• After-sales Service Address: Please contact our salesmen to obtain and provide the corresponding product maintenance reasons (Reference: <u>1.10.0445110111</u> Injector Warranty Instructions)

No.	Name	WeChat/WhatsApp	Email	Facebook	YouTube
1	Ruby	+86-13410541523	ruby@shumatt.com	Hison Li	Hison Li
2	lvy	+86-18025299821	sales@shumatt.com	Ivy Shumatt	Shumatt IVY
3.	Rebecca S	+86-18025349821	sales01@shumatt.com	Rebecca SHUMATT	SHUMATT Rebecca
4	Janny	+86-18028749821	sales02@shumatt.com	Janny shumatt	Janny Shumatt
5	Sam	+86-13316859821	Sales8@shumatt.com	Shumatt Sam	Sam Shumatt
6	Natalie	+86- 18938945856	sales15@shumatt.com	Shumatt Natalie	Lin Natalie
7	Ada	+86-1342286353	sales5@shumatt.com	Shumatt Ada	Ada Shumatt
8	Hison Li	+86-18318811871	web@shumatt.com	Hison Li	Hison Li
9.00	Mecca	+86-18938948618	sales11@shumatt.com	Shumatt Mecca	Shumatt Mecca
10	ST Eric St	+86 18319033618	sales3@shumatt.com	Star Star	20°
11	Wayne (Joaquín en español)	+86-13316959821	wayne@shumatt.com	shumattwayne	Wayne Shumatt
12	Sylvia	+86 18312499884	sales6@shumatt.com	1. 19 19 19 19	a the second
-91	- SU SU SU	Visit <u>http://shumatt.com</u> to ob	tain the latest information of sales-m	en	- 90° - 178
		PS: Shumatt's sales-men's e	mails are all end with @shumatt.com		

5.2. Sales-men's Contact Information

6. Copyright Statement

The copyright of any contents (including but not limited to parameters, data, text, charts, images, sounds or videos, etc.) provided in "0445110111 *Injector* CRI1-MI *Technical File*" belong to Shenzhen Shumatt Technology Co., Ltd. Without the prior written permission of Shenzhen Shumatt Technology Co., Ltd., you are not allowed to modify any contents in "0445110111 *Injector* CRI1-MI *Technical File*" in any way. At the same time, any conditions to spread, re-post, display the contents of "0445110111 *InjectorCRI1-MITechnical File*" should indicate that the cited article is from Shenzhen Shumatt Technology Co., Ltd., Any actions failure to follow above conditions to use "0445110111 *Injector* CRI1-MI *Technical File*" will violate the "*Copyright Law of the People's Republic of China*" and other laws and regulations and the provisions of relevant international parametians.

States.

SP STR

519320

SPRENS .

519.39505

conventions. $a^{\mu \prime}$

Mob/WhatsApp: +86 13410541523 Email : <u>ruby@shumatt.com</u> © 2022 Shenzhen Shumatt Technology Co., Ltd