

SAUMATT

SHUMAT

SHUMAT

SHUMAT

AJMAT

SAUMAT

m

SHIME

0445120064 Injector CRIN2-16 Technical File SAUMATT SHUMATT SHUMATT

3h

3h

SHIMAT

SHUMAT

当机加市下

SHIMA

Trim

SHUMAT

SHUMAT

mint

Зh

3h

SHUMAT

mAT

SHUMAT

SHUMATT Content

MATT	1.0445120064 Injector's Introduction	Trime
show s	1.1. 0445120064 Injector's Basic Information	Dur
	1.2. 0445120064 Injector's Common Part Number 3	
TIM	1.3.0445120064 Injector's Matching Information	The
SAU	1.4.0445120064 Injector's Parameter	UIII.
	1.5.0445120064 Injector's Specifications and Dimensions	
TT	1.6. 0445120064 Injector's Quality Control	
shum.	1.7. 0445120064 Injector's Customized Service7	Mun.
	1.8.0445120064 Injector's Packing List and Package Size	
17	1.9.0445120064 Injector's Testing Standard and Certificate	-5
and mining	1.10.0445120064 Injector's Warranty Instructions	Mur.
	1.11.0445120064 Injector's Manufacturer10	
1	2.0445120064 Injector Technical Support	1
shumin'	2.1.0445120064 Injector's Part Number Location 10	nuu.
21 :	2.2.0445120064 Injector's Application Scenarios10	
	2.3.0445120064 Injector's Installation	1
- AJMAN	2.4. 0445120064 Injector 's Reasons of Not Working Normally	nuu,
31. 3	2.5. 0445120064 Injector 's Causes to Damage 12	
1	2.6.0445120064 Injector's Technical Support Obtaining Methods	
- AJMAIL	3.0445120064 Injector's Purchase and Delivery	Umin'
21.	3.1.0445120064 Injector's Purchase Payment Term	
1	3.2.0445120064 Injector's Main Sales Markets	
	3.3.0445120064 Injector's Declaration Requirements	
3/1- 3	3.4.0445120064 Injector's Shipping Ways	her.
A	3.5.0445120064 Injector's Lead time13	
a Infit '	3.6.0445120064 Injector's Logistics Time for Destination Out of China's Areas	Innu
311- 3	3.7.0445120064 Injector's Packing14	
	4.0445120064 Injector's Storage Standard15	
o IMATA	5. Company Information16	a IMAT
311-	5.1. Company Introduction	
	5.2. Sales-men's Contact Information17	
o Infinit	6. Copyright Statement	o IMAT
	ער ייעאר ייעאר ייעאר ייעאר ייעאר ייעאר ייעאר ייעאר איעאר	A

SHUMAT Mob/WhatsApp: +86 13410541523 Email : ruby@shumatt.com © 2022 Shenzhen Shumatt Technology Co., Ltd

当代山田市

当代山田市

- initi

SHUMA

SHUMA

Tel: +8675523215133 Website : www.shumatt.com

ITTIM.

SHUMA

SHUMAT

SHUMF

SHUMA

0445120064 Injector CRIN2-16 Technical File

1.0445120064 Injector's Introduction

1.1. 0445120064 Injector's Basic Information

Title	China made new high quality CRIN2-16 0445120064 fuel injector
SKU 1	G1W20445120064
SKU 2	W2000B2B120064
a Imril a Imril	
1.2.0445120064	njector's Common Part Number

1.2. 0445120064 Injector's Common Part Number

(1) Injector's Exchange Information

	Injector Part Number			Universa	al Part Num	nber	Re-manufactured Part Number		
SHOW.	0445120064	SHU	lun.	SHUM	SHU	SHOW	0986435529	3	

(2) Injector's Application Information

(PP			
Injector part	KHD	MAGIRUS-DEUTZ	RVI (RENAULT	VOLVO
Number	Car Number	Car Number	VEHICULES IND.)	Car Number
Number	Car Number		Car Number	
SHUMIN SHUM	490 2255	490 2825	74 21 006 086	HUMIT SHUMIT SH
0445120064	04902825		74 21 006 085	
0445120064	04902255		74 20 806 011	TT DAT
Sturm Sturm	490 2825	stum stum	SHUIII SHUIII	Hum shum sh
	4902255	490 2825	74 20 806 011	21006085
0986435529	04902825		74 21 006 086	authint authint
0986435529	04902255	show show	SHOW SHOW	HU. SHU. SH
4	490 2825	A A A		4
	AT ALMAT ALMA	Trampin - Human	-HUMATI -HUMATI	HUMAT' HUMAT'

(3) Injector's Part Number Common Writing

0445120064, 0986435529, 490 2255, 4902255, 0 445 120 064, 0 986 435 529, 490 2825, 4902825, 0445 120 064, 0986 435 529, 74 21 006 086, 7421006086, 0445120 064, 0986435 529, 74 21 006 085, 7421006085, 0 445 120064, 0 986 435529, 74 20 806 011, 7420806011, 0 445120064, 0 986435529, 21006085, 0445 120064, 0986 435529, 04902825, 04902255

a lille. A lille.	a 11111	0 III 122	0 III 11-
1.3.0445120064	Injector's M	atching Ir	formation
TIDIOTTO IZUUUT	Infector 5 M	attining II	normation

					matio			21	21	21	21		23
7	Vehicle brand	Series	Car Model	Engine Model	Production date	Power KW	Horse power	Emission Standards	Manufacturer	Emissions (L)	Cylinder	Power Source V	2
7	RENAUL T	Midlum II	180 Midlum II	DXi 5 180	2009/04- 2014/12	132	180	JMATT	UMATT	4.8	4	24	2
K	RENAUL T	Midlum II	220 Midlum II	DXi 5 220	2009/04- 2014/12	162	220	SMATT	LUMIFITT SHU	4.8	4	24	1.

SHUM Mob/WhatsApp: +86 13410541523 Email : ruby@shumatt.com

Tel: +8675523215133 Website : www.shumatt.com

Shenzhen Shumatt Technology Co., Ltd

3h

3hu

SHU

RENAUL T	Midlum II	300 Midlum II	DXi 7 300	2009/04- 2014/12	221	300		TT	7.2	6
RENAUL T	Premium II	240 Premium II Distributio n	DXi 7 240	2006/06- 2009/03	177	240	31	Ann Ehr	7.2	6
RENAUL T	Premium II	270 Premium II Distributio n	DXi 7 270	2009/04- 2014/12	199	270	STRATT.	Umar . shu	7.2	6
RENAUL T	Premium II	270 Premium II Lander	DXi 7 270	2009/04- 2014/12	199	270	Juura.	NWW. EHN	7.2	6 51
RENAUL T	Premium II	280 Premium II Distributio n	DXi 7 280	2006/06- 2009/03	206	280	IMALA	UMATA	7.2	6 51
RENAUL T	Premium II	280 Premium II Distributio n	DXi 7 280	2007/03- 2009/03	206	280	UMATT	UNATT	7.2 5 4	6 5
RENAUL T	Premium II	280 Premium II Lander	DXi 7 280	2007/03- 2009/03	206	280	UMATT	UMATT	7.2	
RENAUL T	Premium II	310 Premium II Distributio n	DXi 7 310	2009/04- 2014/12	228	310	UMATT	UMATT	7.2	m ⁶
RENAUL	Premium	310 Premium II Distributio n Hybrid	DXi 7 310	2012/06- 2014/12	228	310	UMATT	UMATT	n 7.2	6
RENAUL T	Premium II	310 Premium II Lander	DXi 7 310	2009/04- 2014/12	228	310	UMATT	UMATT	7.2	5
RENAUL T	Premium II	320 Premium II Distributio n	DXi 7 320	2006/05- 2009/03	235	320	UMATT	UMATT	7.2	6
RENAUL T	Premium II	320 Premium II Distributio n	DXi 7 320	2007/03- 2009/03	235	320	IMATT		7.2	6
RENAUL T	Premium II	340 Premium II Distributio n	DXi 7 340	2009/04- 2014/12	250	340		SAL	7.2	6
RENAUL T	Premium II	340 Premium II Lander	DXi 7 340	2009/04- 2014/12	250	340	STT	UNA SHU	7.2	6
VOLVO	FE	FE 240	D7F240	2009/05	311 177	240	Jun - St	Unn shu	7.1	6

SHUMAT Mob/WhatsApp: +86 13410541523 Email : ruby@shumatt.com

SHUMATT

mi

Tel: +8675523215133 Website : <u>www.shumatt.com</u>

- INFITT

SHUMATT

matt

SH

SHUMATT

© 2022 Shenzhen Shumatt Technology Co., Ltd

SHUMF

16	31.	31.	31.	31	31.	31.	31	21.	31.	31	
VOLVO	FE	FE 260	D7F260	2009/05	191	260			7.1	6	
a unitit			Think		7	mT ^T	INFIT	INTERNE	mm	mini	10
	SHE	SHE	SHE	3HL.	SHL	31	51	EL SHE	3h	51	
VOLVO	FE	FE 300	D7F300	2009/05	221	300	4	1	7.1	6	
A MAIL	1 AUTIMAT	Tranta	- AJIMAT		TLA.		JINATI	Unin' I	naT'	mati	5
VOLVO	FE	FE 340	D7F340	2009/05	250	340	31	Er. Shr	7.1	6	
		K	<	,	K		1	1		1	
-AJMAI	- AJMAN	- Almeri	- AUMA	Almin	اللهار	1	JULI		nri'	mm	V
RENAUL T	Midlum II	180 Midlum II	DXi 5 180	2009/04- 2014/12	132	180	31	31.	4.8	4	ľ
	6				~						L
RENAUL	התנאדי	220	mm	2009/04-	ILP-	MI.	JULIA		nri · ·	min	U
T	Midlum II	Midlum II	DXi 5 220	2014/12	162	220	5	31.	4.8	4 51	
1			1	1	<						┝
RENAUL	Midlum II	270	DXi 7 270	2009/04-	199	270	JMAT		7.2	6 51	U
Т	210.00	Midlum II		2014/12			21	21		2 21	
5		1	1	1	ĸ	1	177	T	177	17	F
RENAUL T	Midlum II	300 Midlum II	DXi 7 300	2009/04- 2014/12	221	300	JULY .	nuur. Ehr	7.2	6	V
		27				The V					
	1	1	1	7	K	11	TT	T	17	17	
VOLVO	FEILIN	FE 240	D7E240	2006/05-	117	241	July	Umr. SHU	7.1	6	V
											╞
VOLVO	FE	FE 240	D7F240	2009/05-	117	240	TT	TT	7.1	6	
AJUN.	SHIM	3Hum.	SHUM	SHIM	ZHUN	in sh			The sta	Sun - St	N
											Γ
VOLVO	FE	FE 260	D7F260	2009/05-	191	260	TIM	ummit	7.1	6	
ALM.	SHUM	FE 200	D/F260	2009/05-	SHUN	- sh	51	Lun att	III SH	51	Ρ
VOLVO	FE	FE 280	D7E280	2006/05-	206	200			74	6	
VOLVO			Drezeo	2000/03-	200	280	IMPITI	Infinite al	7.1	6	1
40.	SHE	SHE	SHE	SHE	540.	54	54	SHP	SHI	51	
VOLVO	FE	FE 300	D7F300	2009/05-	221	300	4	1	7.1	6	
amin			in min		n.	ITT'	IMPL'	umfit '	nn ^T	mm ^T	
Al ac	31.	FE 300	31.	311	34-	31	31	3/1-	31.	31	
VOLVO	FE	Hybrid	D7F300	2011/04-	221	301	1		7.2	6	
HUME!		יאטאי	-Humin			11.			11H	mn''	U
VOLVO	FE	FE 320	D7E320	2006/05-	235	320	31	Er. Shr	7.1	6	ſ
VOLTO		12020	571320	x _	K	520	1				
HUMM	-HUMIA	THUMA	-HUMIT	SHIMM	SHUM		JAN	Unit	Mire SHA	min	V
VOLVO	FE	FE 340	D7F340	2009/05-	250	340	21	21	7.1	6	
HUMAN	SHUMAT	SHUMAT	SHUMM	SHUMAT	THIN	1		UMATT	MAIT	IMPITT	

3M

Mob/WhatsApp: +86 13410541523 Email : <u>ruby@shumatt.com</u>

SHUMATT

-min

Tel: +8675523215133 Website : <u>www.shumatt.com</u>

ITIAM

SHUMATT

matt

SHUMATT

© 2022 Shenzhen Shumatt Technology Co., Ltd

SHUMF

17	ЗH	JMFI	T Sh	ienzher	n Shuma	itt Teo	chnolo	ogy Co.	, Ltd	MAIT	INATT	UMATT	· ^ '
17	VOLVO	FE	FE 340 Hybrid	D7F340	2011/04-	250	340			7.2	6	12	her.
4	VOLVO	FL	FL 240	D7E240	2006/05-	177	241	31	Du. Shr	5HL 7.1	6	24	h
17	VOLVO	FL	FL 240	D7F240	2009/04-	177	240	JANTT	UMATT	7.1	6	24	R
17	VOLVO	「 まれ」 所有す FL	FL 260	D7F260	2009/04-	191	260	JMATT	UMMAT	7.1	6 = H	24	h
זה	VOLVO	SHUMAT	FL 280	D7E280	2006/05-	206	280	JMATT	UMATT	7.151	6 54	24	M
17	VOLVO	SHEL	FL 290	D7F290	2009/04-	213	290	JMATT	UMATT	7.15H	6	24	M
177	VOLVO	SHELMAT	FL 320	D7E320	2006/05-	236	320	JMATT	UMATT	7.1		24	HA.

1.4.0445120064 Injector's Parameter

Adaptation System: Common Rail System

Injector Series: 120 Series

SHUM

Parameter Performance: CRIN2-16

Injector Type: Electromagnetic Injector

Support System Maximum Pressure: 1,600

Vehicle Configuration Information: KHD/MAGIRUS-DEUTZ/RVI (RENAULT VEHICULES IND.) /VOLVO

1.5.0445120064 Injector's Specifications and Dimensions

Injector Size: 21.5cm*4 cm *4 cm = 344cm³ (L*W*H=V) Injector Net Weight: 0.55kg Gross Weight: 0.6kg Injector Quality: China Made Brand New Package Size: 28cm*7 cm *7 cm = 1372 cm³ Injector Type: Diesel Common Rail Injector

MOQ: 4 Pieces

1.6. 0445120064 Injector's Quality Control

(1) Injector Testing

All injector spare parts are tested for electrical characteristics, accuracy, high temperature, low temperature, withstand voltage, leakage, durability, and various working conditions.

(2) Injector Assembling

And the quality control of the injector production and installation process, our company strictly follows the standard product installation data and product installation steps to install, such as injector stroke test,

Mob/WhatsApp: +86 13410541523 Email : <u>ruby@shumatt.com</u> Tel: +8675523215133 Website : <u>www.shumatt.com</u>

injector solenoid valve tightening torque, injector nozzle tightening torque,

(3) Injector Inspection

The factory inspection of the injector is undergone full inspection, random inspection, and batch inspection three inspections. Different brands of test benches are used to test the same fuel injector for a total of no less than three times for factory inspection, and the fuel injector installation testing environment are progressed in dust-free workshop.

1.7. 0445120064 Injector's Customized Service

(1) Injector's Customized Service: Meet the customized needs of OEM manufacturers for shell lettering, logo engraving, injector internal packaging, injector external packaging and labels customized, etc.



(2) Injector's Customized Service Requirements:

The purchased of customized injector are not less than 10 pieces.

Customized injector packages no less than 1000 pieces.

Customized products involve the need of specify logo, the OEM manufacturer needs to provide trademark authorization and the sample of logo image file.

▲ Once the customized fuel injector is sold, it cannot be returned or exchanged if there is no quality problems.

1.8.0445120064 Injector's Packing List and Package Size

		Spare Parts List		
1	No.			
1. I.				
	Name	Fuel Injector	O-Ring	Gasket F 00R J02 175
1	Description	Part number: 0445120064	Ensure to meet the standard of the sealing performance between the injector and the engine	Made of brass, used to ensure the tight fit between the injector cap end and the engine
,	No.	4	5	6
	image		IT IN	DIAT.
٢	AUMATT AU	INT	IT - AN	DAT T
1 AL	Name	Nozzle Protective Cover Cap	Injector House Protective Cover Cap	Solenoid Valve Protective Cap
٢	Description	Protect nozzle holes from being polluted and blocked	Protect oil inlet from being polluted and blocked	Protect the solenoid valve body and terminals from being damaged by external forces
1	31- 31-	str str str	str she she	str she str

(1) Injector Spare Parts List

Mob/WhatsApp: +86 13410541523 Email : <u>ruby@shumatt.com</u> Tel: +8675523215133 Website : <u>www.shumatt.com</u>

SF	nenzher	Shum	att Te	chnology	Co., Lt	dri aminiti	a IMATT
311-	7	31.5	31.0	8	314	9 9	1- 31
AN A	NA DA	JUL	11		HUM		=HA
		SHUM		Bubble Bag	i -	Injector Packir Place injector and inject	ng Box
		7 VCI Anti-rust Bag Prevent fuel injector from	7	7	7 8 VCI Anti-rust Bag UCI Anti-rust Bag	7 8 VCI Anti-rust Bag VCI Anti-rust Bag	7 8 9 VCI Anti-rust Bag Bubble Bag Injector Packir

A Minors are forbidden to use the fuel injector assembly, O-ring, gasket, nozzle protective cover, fuel injector house protective cover, solenoid valve protective cover, VCI anti-rust bag, and air bubble bag to avoid personal injury.

• O-ring and gasket are disposable installation accessories, and need to be replaced for

re-installation.


▲ The nozzle protective cover, the injector house protective cover, and the solenoid valve protective cover are recyclable accessories that can be reused.

▲ VCI anti-rust bags and bubble bags are non-degradable materials, please dispose of them properly after using.

▲ The injector and the installation parts should be coated with appropriate sealing oil during installation.

(2) Injector Box Size

No. 1

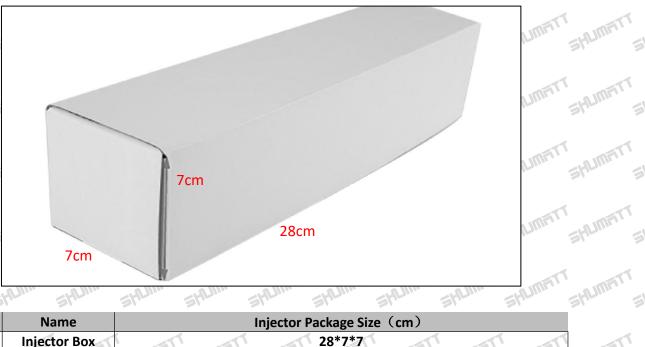

			- W.			21	21	
-	1.9	04451	20064	Injector's	Testing	Standard	and Certif	ficate

We can provide the factory quality inspection test report of each injector to ensure that each injector delivered meets the engine performance indicators.

Mob/WhatsApp: +86 13410541523 Email : <u>ruby@shumatt.com</u> © 2022 Shenzhen Shumatt Technology Co., Ltd Tel: +8675523215133 Website : <u>www.shumatt.com</u>

BOTEN		测试	报告	4.05.2019	10:42:05
承伸企业:					
电话:		201	t:		
倚真:		403	8人:		
WARE:					
tið:		328	8单位.		
倚真:		WF	9姓名:		
秋時1981年:	00000				
急冲名称:	80:003X				
型号·零件号:					
REA:					
4534274322	oso anazare.	检测	結果		
101181010:0	00000-6511				
LEAR TEST:	喻和研測值	948638	EBSK OF B	10.0 × 108	
EsAR TEST:	32	····	*5	3084.48	~
WZEM	38	147 3 #10 5	357	411221	-
Har.	2013	218 5±14.4	0		2
TL:	384	34.6 285	0		4
10.2	14.1	10.7248			2
VE:	42	41218	0		~

1.10.0445120064 Injector's Warranty Instructions

(1) . Product Warranty Conditions and Instructions

It is necessary to provide pictures, videos, or test reports detected by the injector inspection equipment when the injector is abnormal during use as evidence to feed back to the salesman. Abnormal conditions are properly explained such as : 1.Smoke, 2. Engine shake, 3. Difficulty starting the engine, 4. Engine noise, 5. oil leakage etc.

(2) . Injector Warranty Coverage

Within 15 days after customer receives the **0445120064** injector, if there is a performance failure and the product has no appearance damage, customer can choose to replace it or repair it;

If the **0445120064** injector has performance problems during the warranty period (6-12 months), and it is confirmed that it is product's problems after testing, you can contact our salesmen to replace the same model or a reworked product with the same performance for free;

If the injector house has obvious scratches, it can only be repaired and it will be returned as it is if the product is confirmed to be fault-free.

Tips: For products not covered by warranty, our company can provide paid maintenance services. For products after paid repaired, the same performance problem will have a free warranty period within 3 months from the date of repairing.

(3) . Injector Out of Warranty Coverage

The warranty period has expired.

Injector failure caused by high temperature, high pressure, humidity, rain and snow, saline-alkali land, earthquake, and used in abnormal environment.

Customer disassembles or repairs the injector personally resulting in damage to the injector.

Injector damage caused by man-made reasons (throwing, strong magnetic field magnetization, set fire). Injector failure or injector damage caused by non-injector design, technology, manufacturing, quality

and other issues.

Injector failure due to system pressure exceeding system approved pressure.

Injector failure caused by system voltage exceeding approved voltage.

Injector failure caused by impurities (water, lead, aluminum powder, iron powder, sulfide) in the

Mob/WhatsApp: +86 13410541523 Email : <u>ruby@shumatt.com</u> Tel: +8675523215133 Website : <u>www.shumatt.com</u>

system fuel exceeding the standard requirements.

Injector failure caused by not installing according to the tightening torque specified in the vehicle engine maintenance manual (the tightening torque is too large or too small).

Injector failure caused by not following the installation angle specified in the vehicle engine maintenance manual.

Injector failure caused by not following the cleaning requirements specified in the vehicle engine maintenance manual.

Injector failure caused by failure to replace consumable parts as specified in the vehicle engine maintenance manual.

Injector failure caused by not complying with the intake system fit clearance and exhaust system fit clearance requirements specified in the vehicle engine maintenance manual.

Failure to replace the consumable parts and the fitting clearance of the oil inlet system pipeline and the fuel injector connection in accordance with the fuel intake system specified in the vehicle engine maintenance manual.

1.11.0445120064 Injector's Manufacturer

Injector's manufacturer: Shenzhen Shumatt Technology Co., Ltd

2.0445120064 Injector Technical Support

2.1.0445120064 Injector's Part Number Location

1) E.g.: The injector part number see as follows




No.	Name			
	brand, logo, part number,			
SHOIM	series number			
В	nozzle part number			

SHIMF

SHIME

2.2.0445120064 Injector's Application Scenarios

Common rail system is an oil supply method refers to the diesel oil from the fuel tank sucked out by the gear pump through the oil-water separator and the gear pump to diesel fine filter, high-pressure pump, common rail pipe, and fuel injector, all together with the closed-loop fuel supply system composed of sensors and ECU that completely separates the generation of injection pressure and the injection process from each other.



Mob/WhatsApp: +86 13410541523 Email : <u>ruby@shumatt.com</u> © 2022 Shenzhen Shumatt Technology Co., Ltd

Tel: +8675523215133 Website : <u>www.shumatt.com</u>

	SH	<u>UM</u> TT.	Shenzhen Shumatt Technology Co., Ltd						
Charles .	No.	Name	No.	Name	No.	Name	No.	Name	
5	1	Tank	5	Common Rail Pressure Sensor	9	Engine Crankshaft Sensor	A	High Pressure Oil Circuit	
144	2	Diesel Filter	6	Common Rail Pipe	10	Camshaft Sensor	В	Low Pressure Oil Circuit	
ç	3	High-Pressure Pump	7	Injector	11	ECU Electronic Control Unit	~	1 1	
	4	Fuel Gear Pump	8	Accelerator Pedal	inter		11.		

2.3.0445120064 Injector's Installation

(1) .0445120064 Injector's Installation Precautions:

The replacement of the fuel injector must strictly follow the electrical system, the approved pressure of the low-pressure fuel intake system, the approved pressure of the high-pressure fuel circuit system, and fuel system replacement consumables requirements (including the low-pressure fuel circuit system filter and the high-pressure fuel circuit) specified in the vehicle engine maintenance manual,

A Replacement of wearing parts of the fuel system, cleaning requirements for the connection between the fuel system and the injector, the fitting clearance of the fuel injector connection, the installation angle and tightening torque of the injector, the fitting clearance of the intake system, and the fitting clearance of the exhaust system to ensure the service life of the engine and the normal operation of the injector.

▲ When installing the fuel injector on the engine, it is necessary to clean the engine block, cylinder head and other parts connected to the fuel injector, and ensure that there is no dust, carbon deposits, water, rust spots, etc.

Before installing, check whether the fuel injector nozzle gasket has been replaced and installed on the fuel injector.

A When installing the fuel injector, apply lubricant between the fuel injector, fuel nozzle sealing gasket and O-ring.

Without replacing new gasket can lead to: deformation of the tight cap of nozzle, deformation of nozzle, deformation of nozzle orifice, oil leakage and air leakage, which will cause serious damage to the fuel injector and nozzle to break and cause damage to the engine.

When installing the injector on the engine, please carefully check the components related to the installation of the injector, such as the injector pressure plate, screw, injector rod and other accessories are not deformed, and install it in strict accordance with the operation steps of the engine maintenance manual.
It is forbidden to operate the bare injector for a long time in an environment with serious dust pollution and corrosion to iron products.

A It is forbidden to operate the bare injector for a long time in a strong magnetic field environment.

2.4. 0445120064 Injector 's Reasons of Not Working Normally

(1) There is air in the oil circuit of the engine fuel system.

(2) Vehicle oil pump oil supply system is not normal.

(3) Engine common rail system oil leakage or pressure limiting valve damage.

(4) There is a short circuit, cutting out and poor contact in the wiring harness connected to the fuel injector of the vehicle.

(5) The long-term placement of the injector causes the anti-rust oil to solidify, and the internal components are stuck or the oil holes are blocked.

Before installing, carefully check whether other components in the common rail system except the fuel injector are damaged so as to prevent the fuel injector from not working properly after being replaced.

Mob/WhatsApp: +86 13410541523 Email : <u>ruby@shumatt.com</u> Tel: +8675523215133 Website : <u>www.shumatt.com</u>

2.5. 0445120064 Injector 's Causes to Damage

(1) Didn't operate properly according to engine maintenance manual during disassembly or installation, resulting in damage to the injector .

(2) The fuel oil used for the vehicle does not meet the standard cause damage to the injector, such as: the water content in the fuel oil exceeds the standard, iron powder, aluminum powder, sulfide impurities exceed the standard, etc.

(3) The engine is not regularly maintained according to the engine maintenance manual (please refer to the vehicle maintenance manual for the maintenance mileage). For example, failure to replace the lubricating oil of the engine system for a long time will cause abnormal wear of the engine, excessive exhaust gas volume or a large amount of carbon deposits inside the engine. The filter is not replaced during maintenance or the replaced filter cannot reach the original filter standard. all above reasons can cause damage to the injector.

(4) The abrasion of the oil pump produces iron powder and aluminum powder enter the fuel injector and cause damage to the fuel injector.

(5) The deformation and abrasion of fuel tank result in iron powder or aluminum powder entering the fuel injector and causing damage to the fuel injector.

(6) The fuel injector is damaged due to replacement or adjustment of the relevant parts of the fuel injector. For example, the valve clearance does not meet the standard after the engine is repaired, the replacement or modification of the wiring harness connected to the injector fails to meet the original standard.

(7) The engine is overheated and overloaded for a long time working results in damage to the fuel injector.

(8) The injector will be damaged naturally at the end of its working life.

(9) The injector is magnetized (injector parts' magnetic exceeded) causing the injector to not work properly.

A Before replacing the fuel injector, please check the engine parts carefully according to the engine maintenance manual to avoid the fuel injector being damaged again after replacement.

2.6.0445120064 Injector's Technical Support Obtaining Methods

(1) Injector Technical File, visit <u>http://shumatt.com</u> to get the technical file.

(2) Injector Technical Videos

Facebook: Visit <u>https://www.facebook.com/hison.li</u> to get the technical videos, constantly follow can get more information.

YouTube: <u>https://www.youtube.com/channel/UCByvYBx7VjV_mAfxh_Hu-aw</u> to get the technical videos, constantly follow can get more information.

Shumatt: Visit http://shumatt.com to get the technical videos.

(3) Injector Information Query Software

TruckBook Parts EPC APP, Android/Apple App Store download and install, visit <u>http://shumatt.com</u> to get the download and installation tutorial

(4) Search The fuel injector test data through TruckBook Parts EPC APP.

Mob/WhatsApp: +86 13410541523 Email : ruby@shumatt.com Tel: +8675523215133 Website : <u>www.shumatt.com</u>

SHUMFITT Shenzhen Shumatt Technology Co., Ltd

3.0445120064 Injector's Purchase and Delivery

3.1.0445120064 Injector's Purchase Payment Term

Payment Terms:T/T, PayPal, Alipay, WeChatPlease contact our salesmen for specific payment information.

3.2.0445120064 Injector's Main Sales Markets

Injector main sales markets: Asia, Europe, North America, South America, Africa etc.

3.3.0445120064 Injector's Declaration Requirements

Shumatt can assist customers to provide the following documents for import customs clearance: contract, invoice, packing list, bill of lading, insurance policy, certificate of origin, etc.

3.4.0445120064 Injector's Shipping Ways

Destination in China areas: SF Express, Debon Express, the corresponding logistics company can be provided according to customer requirements in special cases.

Destinations out of China's areas: DHL, UPS, FedEx, TNT air, ocean or other shipping methods required by customers.

3.5.0445120064 Injector's Lead time

Lead time: Send out within 3 – 7 working days after receiving payment (Except for special products and special cases).

3.6.0445120064 Injector's Logistics Time for Destination Out of China's Areas

DHL Logistics Time :

Country or Region of Departure	Hong Kong, China	Other Countries or Regions of Asia	Australia and New Zealand	Europe	America	Other Countries
China's Mainland	7 Days	7 Days	8 Days	8 Days	8-12 Days	7-10 Days
LIDE Logistics Time	Country or	Pogion of Departure	China's Mainlan	4	1	The second

UPS Logistics Time: Country or Region of Departure: China's Mainland

Country of Destination	Estimated Arrival Time	Country of Destination	Estimated Arrival Time	Country of Destination	Estimated Arrival Time
Japan	3 Days	UK	5-7Days	Egypt	5-7 Days
Turkey	5-7 Days	Singapore	3 Days	Switzerland	5-7 Days
Bahrain	5-7 Days	Latvia	7-10 Days	New Zealand	7-10 Days
Sri Lanka	5-7 Days	Thailand	3 Days	Austria	5-7 Days
Romania	5-7 Days	Vietnam	3-5 Days	Estonia	5-7 Days
Malaysia	3-5 Days	Israel	5-7 Days	Mexico	7-10 Days
France	5-7 Days	America	5-7 Days	United Arab Emirates	5-7 Days
Italy Show	5-7 Days	Netherlands	5-7 Days	Bengal	7-10 Days
Lebanon	5-7 Days	Philippine	3-5 Days	Greece	7-10 Days
South Korea	3 Days	Spain	5-7 Days	Myanmar	5-7 Days
Canada	5-7 Days	Germany	5-7 Days	Saudi Arabia	7-10 Days
Portugal	5-7 Days	Australia	5-7 Days	South Africa	7-10 Days
Denmark	5-7 Days	Belgium	5-7 Days	Ukraine	7-10 Days
1. 21.	31	31. 31. 3	31. 31.	31. 31.	31.

Mob/WhatsApp: +86 13410541523 Email : <u>ruby@shumatt.com</u> Tel: +8675523215133 Website : <u>www.shumatt.com</u>

		Qui. Qui.	CHINE CON		
India	7-10 Days	Qatar	7-10 Days	Poland	5-7 Days
Indonesia	3-5 Days	Morocco	7-10 Days	Pakistan	7-10 Days
Kuwait	7-10 Days	-HUMFIL -HUMFIL	Almin	יישואר אישוראי	A HUMAN

The logistics time is for reference only , subjects are according to the actual arrival.

3.7.0445120064 Injector's Packing

SHUMAI

SHUMAT

AJMAT.

Domestic express packaging: Usually wrapped in waterproof scotch tape, such as picture No.2. **International express packaging :** Wrapped with waterproof yellow tape After wrapping the black protective film, such as picture No. 3.

Pallet Shipping : Use fumigation free and recycling trays that meet export requirements, and use white wrapping protective film to wrap and bind with cable ties for the outside, such as picture No. 4, also, the products can be packaged according to customers' requirements.

A The packing tray is made of plastic and can be recycled.

A Transparent tape, yellow tape, black wrapping protective film, white wrapping protective film are non-degradable materials, please dispose of them properly.

Minors are prohibited from using transparent tape, yellow tape, black wrapping protective film, and white wrapping protective film to avoid personal injury.



SHUMAT



Pic No. 2 Domestic express packaging: Wrapped with Transparent tape

International express packaging: Wrapped with yellow tape after wrapping black protective film

SHUMAT

Mob/WhatsApp: +86 13410541523 Email : <u>ruby@shumatt.com</u> © 2022 Shenzhen Shumatt Technology Co., Ltd

Tel: +8675523215133 Website : <u>www.shumatt.com</u>



Pic No. 4

SHUMAT

Pallet Shipping: Use pallet that meet export requirements, and use white wrapping protective film to wrap and bind with cable ties

4.0445120064 Injector's Storage Standard

(1) Choose a suitable storage place

The warehouse and cargo yard where the fuel injector is stored should be kept clean and dry, and away from the factory buildings that generate harmful gases and dust; do not mix with acid, alkali, salt and other substances; the storage place should have a good drainage system; the cargo yard should be flattened with gravel or furnace ash etc. to enhance the water permeability of the surface layer to keep the reservoir area dry.

(2) Strict requirements of warehousing

Strict inspections should be carried out when the fuel injectors are put into storage, the surface cleaning work should be done well to remove water traces, oil stains, ash and other dirt, remove the rust and do anti-rust treatment in time. Packaged injectors must be protected from damage.

(3) Keep the warehouse dry and preventing moisture

The relative humidity is usually below 70% for the fuel injectors placed in the room, and the corrosion of the fuel injectors is significantly reduced.

Injectors must be stored in the warehouse, and they are forbidden to store in the same warehouse with commodities with high water content.

(4) Stack Properly

After the injector is exposed to rain, the corrosion rate will increase significantly. The purpose of sealing is to isolate the injector from rainwater and humid air, so the warehouse window should be checked in time to avoid rainwater entering the warehouse

If the fuel injector package is damaged, it should be repaired or replaced; when the package is damp, the packaging material should be dried; if the original anti-corrosion and oil applied at the factory is found to be damaged or dried up, it should be cleaned and re-applied oil in time.

A It is forbidden to leave the injector exposed in the air for a long time.

A It is forbidden to store acid, alkali, salt and other substances together with the injector.

Mob/WhatsApp: +86 13410541523 Email : <u>ruby@shumatt.com</u> Tel: +8675523215133 Website : <u>www.shumatt.com</u>

HUMFITT Shenzhen Shumatt Technology Co., Ltd

▲ The unpacked fuel injector must be rust-proof during secondary storage.

5. Company Information

Office Locations

Global Exhibitions

5.1. Company Introduction Chinese Name: 深圳市舒马特科技有限公司 English Name: Shenzhen Shumatt Technology Co., Ltd Mob Phone/WeChat: +86-13410541523

HK Telephone: +852-67653519

Telephone: +86-755-23215133

Email: ruby@shumatt.com

AJMA'

Website: www.shumatt.net

Shenzhen Office: 11-12, Floor 14, Building 13, Qinchengda Building, Exit A, Honglang North Subway Station, Bao'an District, Shenzhen, China's Mainland

mini

IMAI

Shenzhen Office: Room 428-430, Building B, Huafeng Zhigu Technology Industrial Park, Exit B, Fuyong Metro Station, Bao'an District, Shenzhen, China's Mainland

Hong Kong Office: Jianfa Street Industrial Zone, Tuen Mun, New Territories, Hong Kong, China

After-sales Service Address : Please contact our salesmen to obtain and provide the corresponding

Mob/WhatsApp: +86 13410541523 Email : <u>ruby@shumatt.com</u> Tel: +8675523215133 Website : <u>www.shumatt.com</u>

IMAT

mini

product maintenance reasons (Reference: 1.10. 0445120064 Injector Warranty Instructions)

No.	Name	WeChat/WhatsApp	Email	Facebook	YouTube
1	Ruby	+86-13410541523	ruby@shumatt.com	Hison Li	Hison Li
2	lvy	+86-18025299821	sales@shumatt.com	Ivy Shumatt	Shumatt IVY
3	Rebecca	+86-18025349821	sales01@shumatt.com	Rebecca SHUMATT	SHUMATT Rebecca
4	Janny Street	+86-18028749821	sales02@shumatt.com	Janny shumatt	Janny Shumatt
5	Sam	+86-13316859821	Sales8@shumatt.com	Shumatt Sam	Sam Shumatt
6	Natalie	+86- 18938945856	sales15@shumatt.com	Shumatt Natalie	Lin Natalie
7	Ada	+86-1342286353	sales5@shumatt.com	Shumatt Ada	Ada Shumatt
8 1111	Hison Li	+86-18318811871	web@shumatt.com	Hison Li	Hison Li
9	Mecca	+86-18938948618	sales11@shumatt.com	Shumatt Mecca	Shumatt Mecca
10	Eric	+86 18319033618	sales3@shumatt.com		
11	Wayne (Joaquín en español)	+86-13316959821	wayne@shumatt.com	shumattwayne	Wayne Shumatt
12	Sylvia	+86 18312499884	sales6@shumatt.com	Unin HUm	-HUIM
21	21 21	Visit http://shumatt.com.to.ok	tain the latest information of salesmo	en	21 2

5.2. Sales-men's Contact Information

Shumatt's sales-men's emails are all end with @shumatt.com

6. Copyright Statement

SHIME

SHIME

The copyright of any contents (including but not limited to parameters, data, text, charts, images, sounds or videos, etc.) provided in "0445120064 Injector CRIN2-16 Technical File" belong to Shenzhen Shumatt Technology Co., Ltd. Without the prior written permission of Shenzhen Shumatt Technology Co., Ltd., you are not allowed to modify any contents in "0445120064 Injector CRIN2-16 Technical File" in any way. At the same time, any conditions to spread, re-post, display the contents of "0445120064 Injector CRIN2-16 Technical File" should indicate that the cited article is from Shenzhen Shumatt Technology Co., Ltd., Any actions failure to follow above conditions to use "0445120064 Injector CRIN2-16 Technical File" will violate the "Copyright Law of the People's Republic of China" and other laws and regulations and the provisions of relevant international conventions.

SHIM Mob/WhatsApp: +86 13410541523 Email : ruby@shumatt.com © 2022 Shenzhen Shumatt Technology Co., Ltd

Tel: +8675523215133 Website : www.shumatt.com

17/17