









SHUDDER

SPANIST

0445110011 Injector CRI1-13 Technical File

SPREAT

Standing	د جو <sup>روز</sup>
1.0445110011 Injector's Introduction	2
1.1. 0445110011 Injector's Basic Information	2
1.2. 0445110011 Injector's Common Part Number	2
1.3.0445110011 Injector's Matching Information	
1.4.0445110011 Injector's Parameter	4
1.5.0445110011 Injector's Specifications and Dimensions	4
1.6. 0445110011 Injector's Quality Control 1.7. 0445110011 Injector's Customized Service	4
1.7. 0445110011 Injector's Customized Service	
1.8.0445110011 Injector's Packing List and Package Size	<u></u> 5
1.9.0445110011 Injector's Testing Standard and Certificate	6
1 10 0445110011 Injector's Warranty Instructions	7
1.11.0445110011 Injector's Manufacturer	8
1.10.0445110011 Injector's Manufacturer	8
2.1.0445110011 Injector's Part Number Location	8
2.2.0445110011 Injector's Application Scenarios	8
2 3 0445110011 Injector's Installation	9
2.4. 0445110011 Injector 's Reasons for Not Working Normally	. 10
2.4. 0445110011 Injector 's Reasons for Not Working Normally2.5. 0445110011 Injector 's Causes of Damage	10
2.6.0445110011 Injector's Technical Support Obtaining Methods	. 10
3.0445110011 Injector's Purchase and Delivery	11
3.1.0445110011 Injector's Purchase Payment Term	11
3.2.0445110011 Injector's Main Sales Markets	. 11
3.1.0445110011 Injector's Purchase Payment Term3.2.0445110011 Injector's Main Sales Markets3.3.0445110011 Injector's Declaration Requirements	11
3.4.0445110011 Injector's Shipping Ways	11
3.5.0445110011 Injector's Lead time	11
3.6.0445110011 Injector's Logistics Time for Destination Out of China's Areas	11
3.7.0445110011 Injector's Packing	12
4.0445110011 Injector's Storage Standard	13
5. Company Information:	<u>.</u> 14
5.1. Company Introduction	14
5.2. Sales-men's Contact Information	15
5.2. Sales-men's Contact Information 6. Copyright Statement	15
. 21 21	847
SAVERAL, SA	s. S
SHARALL SHERALL	ر چرې

Mob/WhatsApp: +86 13410541523 Email : <u>ruby@shumatt.com</u> © 2022 Shenzhen Shumatt Technology Co., Ltd

The The The Tree The

. and

Tel: +8675523215133 Website : www.shumatt.com

. all the

and a strength and the strength and the

#### SPANNET 0445110011 Injector CRI1-13 Technical File

SPERMAN

SPARAL

SPARAT

51450F

SPLEER

 $\otimes l^{0,2} \overset{\otimes}{\longrightarrow}$ 

 $\varphi_{i}^{(0)}$ 

#### 1.0445110011 Injector's Introduction

STRUMENT

#### A. Street, Street, Street, Street, 1.1. 0445110011 Injector's Basic Information

and Title of an	China made new high quality diesel injector 0445110011 fuel injector CRI1-13
SKU 1	G1W20445110011
SKU 2	NALL STRING S

#### 1.2. 0445110011 Injector's Common Part Number

## (1) Injector's Exchange Information

2010 - 20	injector s common r art Number	A A A A A A
(1) Injector's Excl	hange Information	and a state of the state of the state of the state
20 20.	Injector Part Number	Re-manufactured Part Number
Allow Allow	0445110009	0 986 435 004
Store Store	0 445 110 010	and the state and a state at
	0 445 110 011	
AND A ADDAY	0 445 110 012	and a start water and the start of the
(2) Injector's App	lication Information	n pu, pu, pu, pu, pu, by, by,
Injector Part	MERCEDES-BENZ Car	

injector Part	WILINCLULS-DLINZ Cal
Number	Model

0445110009	611 070 04 87	the state at the	The state of	and a start of
Bu. 0442410002 Bu	A 611 070 04 87	30 30	1961 - 1961 - 1961 -	341 341
0 445 110 010	611 070 04 87	at start	i The Star	at 1
310-443 110-010 St	A 611 070 04 87	Store Store		n 99 an 96
The sta	611 070 05 87	ton the ton	The The I	The The
aterne aterne at	A 611 070 05 87	Store Store	at the state	en alter alt
A 41	A 611 070 05 87 38		1. J. J.	
0 445 110 011	A 611 070 04 87	N. States States	and a start of	na stan st
0 443 110 011	611 070 05 87 38			
and a state and a	611 070 03 87	THE CONTRACT OF STREET	AL PORTS STREET	and and and
or or or	611 070 04 87	2	5	21 21
ANDALS ADDALS	A 611 070 03 87	and a contraction	Trans. Trans.	and all a
str - Str - St	611 070 05 87	-97° - 97°		\$7° \$7°
0 445 110 012	A 611 070 05 87	San San To	The The r	and and
310-443 TT0-012 31	611 070 04 87	310 - 310 -	31 - 31 - 31	1 - 3 - 3 - 3 - 3 - 3 - 3 - 3 - 3 - 3 -
San San	A 611 070 04 87	the star star	The Star I	the liter
anter anter at	611070 05 87	Story Straw	and an	9 <sup>00</sup> 9 <sup>00</sup> 90
0 986 435 004	611 070 05 87 0080	at at a	5	
0 960 455 004	611 070 04 87	and a state of the	and and all	and all all all
	611 070 04 87 0080			
. all . all .	and and and a state	de de de	· The Star	and and the second

Mob/WhatsApp: +86 13410541523 Email : ruby@shumatt.com © 2022 Shenzhen Shumatt Technology Co., Ltd

SHUMAT	Shenzhen Shur	natt Technolog	gy Co., Ltd	
1.1	A 611 070 05 87 0080		1 - 1 - 1	5 5
Straw Straw St	A 611 070 04 87 0080		and and a	en stan st
~ ~	611 070 05 8738	1	e se se	
Strand Strand St	A 611 070 05 87		all all all all	and all all all all
	611 070 05 87 80			_
and the all the as	A 611 070 05 87 38	The second second	and a state of the second	the staffer with
30. 30. 30	A 611 070 04 87	20. 20.	30. 30. 30.	.341, .341,
anter anter	A 611 070 05 87 80	the state and	· The The	and a state of
(3) Injector's Part	Number Common Writing	Stor Stor	- 51°° - 51°° - 51°	n daa daa

#### (3) Injector's Part Number Common Writing

0445110009, 0445110010, 0445110011, 0986435004, 0445 110 009, 0445 110 010, 0445 110 011, 0 986 435 004, 0 445 110009, 0 445 110010, 0 445 110011, 0 986 435004, 0 445110009, 0 445110010, 0 445110011, 0 986435004, 0445 110 009, 0445 110 010, 0445 110 011, 0986 435 004, 0445110 009, 0445110 010, 0445110 011, 0986435 004, 0445 110009, 0445 110010, 0445 110011, 0986 435004, 611070 05 87, 611 070 04 87 0080, 61107004870080, A 611 070 05 87 0080, A61107005870080, A 611 070 05 87, A6110700587, A 611 070 05 87 38, A611070058738, A 611 070 04 87, A6110700487, 611 070 04 87, 6110700487, 611 070 03 87, 6110700387, A 611 070 03 87, A6110700387, 611 070 05 87 0080, 61107005870080, A 611 070 04 87 0080, A61107004870080, 611 070 05 8738, 611070058738, 611 070 05 87 80, 611070058780, A 611 070 05 87 80, A611070058780, 611 070 05 87, 611 070 05 87 80, 611070058780, A 611 070 05 87 80, A611070058780, 611 070 05 87, 611 070 05 87 80, 611070058780, A 611 070 05 87 80, A611070058780, 611 070 05 87, 611 070 05 87 80, 611070058780, A 611 070 05 87 80, A611070058780, 611 070 05 87, 6110700587, 611 070 05 87 38

1.3.01	4311001	1 mjece	or s match	ing inform	ation	all and	all and	S	and the second	1977 - Level -	
Vehicle brand	Series	Car Model	Engine Model	Production date	Power (KW)	Horse power	Emission Standards	Manufacturer	Emissions (L)	Cylinder	Power Source (V)
MERCE DES- BENZ	V [638]	V 200 CDI	OM 611.980	1999/06 - 2003/09	75	102			2.2	4	12
MERCE DES- BENZ	V [638]	V 220 CDI	OM 611.980	1999/06 - 2003/09	90	122			2.2	4	12
MERCE DES- BENZ	Vito [638]	108 CDI Vito	OM 611.980	1999/04 - 2003/09	60	82			2.2	4	12
MERCE DES- BENZ	Vito [638]	110 CDI Vito	OM 611.980	1999/04 - 2003/09	75	102			2.2	4	12
MERCEDE S-BENZ	Vito [638]	112 CDI Vito	OM 611.98 0	1999/0 4- 2003/0 9	90	122		21 2	2. 2	4	12

1.3.0445110011 Injector's Matching Information

Mob/WhatsApp: +86 13410541523 Email : <u>ruby@shumatt.com</u> © 2022 Shenzhen Shumatt Technology Co., Ltd

							01	-			
MERCE DES- BENZ	V [638]	V 200 CDI	OM 611.980	1999/06 - 2003/09	75	102			2.2	4	12
MERCE DES- BENZ	V [638]	V 220 CDI	OM 611.980	1999/06 - 2003/09	90	122			2.2	4	12
MERCE DES- BENZ	Vito [638]	108 CDI Vito	OM 611.980	1999/04 - 2003/09	60	82			2.2	4	12
MERCE DES- BENZ	Vito [638]	110 CDI Vito	OM 611.980	1999/04 - 2003/09	75	102			2.2	4	12
MERCE DES- BENZ	Vito [638]	112 CDI Vito	OM 611.980	1999/04 - 2003/09	90	122			2.2	4	12

#### 1.4.0445110011 Injector's Parameter

Adaptation System: Common Rail System Injector Series: 120 Series Parameter Performance: CRI1-13 Matching Accessories: Gasket F 00R J01 086 (7.73\*14.36\*1.49) Injector Type: Electromagnetic Injector Support System Maximum Pressure: 1350 Vehicle Configuration Information: MERCEDES-BENZ

#### 1.5.0445110011 Injector's Specifications and Dimensions

Injector Size: 21.5cm\*4 cm \*4 cm = 344cm<sup>3</sup> (L\*W\*H=V Injector Net Weight: 0.55kg Gross Weight: 0.6kg Injector Quality: China Made Brand New Package Size: 28cm\*7 cm \*7 cm = 1372 cm<sup>3</sup> Injector Type: Diesel Common Rail Injector MOQ: 4 Pieces

#### 1.6. 0445110011 Injector's Quality Control

#### (1) Injector Testing

All injector spare parts are tested for electrical characteristics, accuracy, high temperature, low temperature, withstand voltage, leakage, durability, and various working conditions.

#### (2) Injector Assembling

And the quality control of the injector production and installation process, our company strictly follows the standard product installation data and product installation steps to install, such as injector stroke test, injector solenoid valve tightening torque, injector nozzle tightening torque,

#### (3) Injector Inspection

The factory inspection of the injector is undergone full inspection, random inspection, and batch

Mob/WhatsApp: +86 13410541523 Email : <u>ruby@shumatt.com</u> © 2022 Shenzhen Shumatt Technology Co., Ltd

inspection three inspections. Different brands of test benches are used to test the same fuel injector for a total of no less than three times for factory inspection, and the fuel injector installation testing environment are progressed in dust-free workshop.

# 1.7. 0445110011 Injector's Customized Service

(1) Injector's Customized Service: Meet the customized needs of OEM manufacturers for shell lettering, logo engraving, injector internal packaging, injector external packaging and labels customized, etc.

-987°	20		1					30.	30.1		-90%
SHURRE	STA		10 CT				ø			184	19 <sup>4,975</sup> 51 <sup>96</sup>
SPAINT	SHRU	and the second	1 MART	5	9.		ø		24	A BE DO DE A B BER HE MAN	ant i ath
	Injector	nozzle engraving	1.18 A.	Inje	ctor house lettering and QR code	g girt	an <sup>a</sup> l <sup>1</sup>	Injector b	ox and	label	1997

## (2) Injector's Customized Service Requirements:

The purchased of customized injector are not less than 10 pieces.

Customized injector packages no less than 1000 pieces.

Customized products involve the need of specify logo, the OEM manufacturer needs to provide trademark authorization and the sample of logo image file.

 $\mathcal{A}^{(0)}$ 


▲ Once the customized fuel injector is sold, it cannot be returned or exchanged if there is no quality problems.

## 1.8.0445110011 Injector's Packing List and Package Size

#### No. $\sigma^{\mu \lambda}$ Image **Fuel Injector** O-Ring Gasket F 00V C17 503 Name Ensure to meet the Made of brass, used to ensure the standard of the sealing Fuel injector part number: 0445110011 Description tight fit between the injector cap end performance between the injector and the engine and the engine No. 6 Image Nozzle Protective Cover Cap Injector House Protective Cover Cap Solenoid Valve Protective Cap Name Protect the solenoid valve body and Protect nozzle holes from Protect oil inlet from Description terminals from being damaged by being polluted and blocked being polluted and blocked external forces No. Image VCI Anti-rust Bag Injector Packing Box Name **Bubble Bag**

(1) Injector Spare Parts List

Mob/WhatsApp: +86 13410541523 Email : <u>ruby@shumatt.com</u> © 2022 Shenzhen Shumatt Technology Co., Ltd

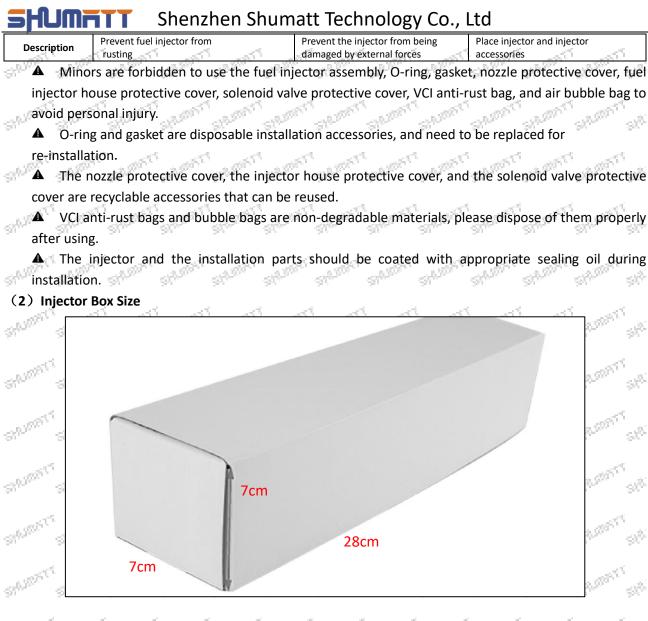

1	No.	Name			Injec	tor Package Size	e (cm)				<u>s</u> .
30	1	Injector Box	1201	24	10.1	28*7*7	301	10	101	20	Ľ

## 1.9.0445110011 Injector's Testing Standard and Certificate

We can provide the factory quality inspection test report of each injector to ensure that each injector delivered meets the engine performance indicators.



Mob/WhatsApp: +86 13410541523 Email : <u>ruby@shumatt.com</u> © 2022 Shenzhen Shumatt Technology Co., Ltd

		测试	报告	4.05.2019	10:42:01
录伸企业:					
电波:		284	t;		
侍真:		403	8人:		
WORE:					
tið:		224	8单位:		
倚真:		WF	<sup>9</sup> 姓名:		
於時期(注:					
2)什么称:	ND HE (K)				
型号-零件号:					
kilen:					
			结里		
Kila:	00000-6511	检测	结果	1982.05	
KikA: Istatra: (	0000-6511 \$166581		REEKOED	est a feb	
Ellaria: Ionianya: ( Ioni test:	00:000-6511 10:000-6511 10:000-6511	检测 940048	8528.083 43	30.8 ± * ± 8	~
EELA: EENAITA: ESACTIST: Fad:	2012002-6511 助年65米的 32 33	检测 *******	R588.003 63 757	****** *****	* *
EREA: CONTIST: For: WARM	(9500)-6511 略成時間 32 33 33	检测 94%组 	8688.08% 65 757 65	884295 884295	
ERBART ERBERTET: ESACTEST: Back: WARM: Has:	(9500)-6511 申収(2後前 34 35 35 315	检测 94%组 	REAKORD 65 55 65 65 65	814716 814726	5 <b>-</b> 5
ESTARA: ESTABLICAT: ESAKTEST: Rade: WARAN: Maar: TL:	295002-6511 申年63時前 34 35 35 315 36-	检测 940%38 - 4   	8688.08% 65 757 65	884295 884295	4
ERBART ERBERTET: ESACTEST: Back: WARM: Has:	(9500)-6511 申収(2後前 34 35 35 315	检测 94%组 	REAKORD 65 55 65 65 65	814716 814726	

SHUMATT

## 1.10.0445110011 Injector's Warranty Instructions

#### (1) . Product Warranty Conditions and Instructions

It is necessary to provide pictures, videos, or test reports detected by the injector inspection equipment when the injector is abnormal during use as evidence to feed back to the salesman. Abnormal conditions are properly explained such as: 1.Smoke, 2. Engine shake, 3. Difficulty starting the engine, 4. Engine noise, 5. oil leakage etc.

#### (2) . Injector Warranty Coverage

Within 15 days after customer receives the 0445110011 injector, if there is a performance failure and the product has no appearance damage, customer can choose to replace it or repair it;

If the 0445110011 injector has performance problems during the warranty period (3 months), and it is confirmed that it is product's problems after testing, you can contact our salesmen to replace the same model or a reworked product with the same performance for free;

If the injector house has obvious scratches, it can only be repaired and it will be returned as it is if the product is confirmed to be fault-free.

# ▲ Tips: For products not covered by warranty, our company can provide paid maintenance services. For products after paid repaired, the same performance problem will have a free warranty period within 3 months from the date of repairing.

#### (3) . Injector Out of Warranty Coverage

The warranty period has expired.

Injector failure caused by high temperature, high pressure, humidity, rain and snow, saline-alkali land, earthquake, and used in abnormal environment.

Customer disassembles or repairs the injector personally resulting in damage to the injector.

Injector damage caused by man-made reasons (throwing, strong magnetic field magnetization, set fire). Injector failure or injector damage caused by non-injector design, technology, manufacturing, quality and other issues.

Injector failure due to system pressure exceeding system approved pressure.

Injector failure caused by system voltage exceeding approved voltage.

Injector failure caused by impurities (water, lead, aluminum powder, iron powder, sulfide) in the system

Mob/WhatsApp: +86 13410541523 Email : <u>ruby@shumatt.com</u> © 2022 Shenzhen Shumatt Technology Co., Ltd

#### fuel exceeding the standard requirements.

Injector failure caused by not installing according to the tightening torque specified in the vehicle engine maintenance manual (the tightening torque is too large or too small).

Injector failure caused by not following the installation angle specified in the vehicle engine maintenance manual.

Injector failure caused by not following the cleaning requirements specified in the vehicle engine maintenance manual.

Injector failure caused by failure to replace consumable parts as specified in the vehicle engine maintenance manual.

Injector failure caused by not complying with the intake system fit clearance and exhaust system fit clearance requirements specified in the vehicle engine maintenance manual.

Failure to replace the consumable parts and the fitting clearance of the oil inlet system pipeline and the fuel injector connection in accordance with the fuel intake system specified in the vehicle engine maintenance manual.

#### 1.11.0445110011 Injector's Manufacturer

Injector's manufacturer: Shenzhen Shumatt Technology Co., Ltd

# 2.0445110011 Injector Technical Support

#### 2.1.0445110011 Injector's Part Number Location






No.	Name
The second second	brand, logo, part number,
Sur. + Su.	series number
B	nozzle part number
the state of	P AP AP AP A

## 2.2.0445110011 Injector's Application Scenarios

Common rail system is an oil supply method refers to the diesel oil from the fuel tank sucked out by the gear pump through the oil-water separator and the gear pump to diesel fine filter, high-pressure pump, common rail pipe, and fuel injector, all together with the closed-loop fuel supply system composed of sensors and ECU that completely separates the generation of injection pressure and the injection process from each other.



Mob/WhatsApp: +86 13410541523 Email : <u>ruby@shumatt.com</u> © 2022 Shenzhen Shumatt Technology Co., Ltd

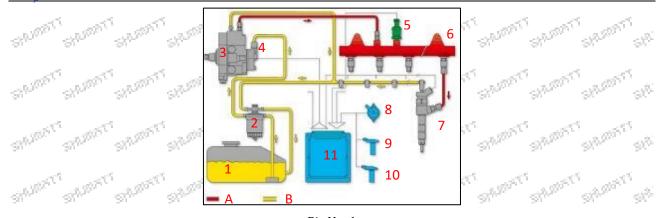

		1	Pic	: No. 1	in the later	1	. A A.
No.	Name	No.	Name	No.	Name	No.	Name
1	Tank	5	Common Rail Pressure Sensor	9	Engine Crankshaft Sensor	A	High Pressure Oil Circuit
\$ <sup>10</sup> 2	Diesel Filter	6	Common Rail Pipe	10	Camshaft Sensor	B	Low Pressure Oil Circuit
3	High-Pressure Pump	് 7	Injector	11	ECU Electronic Control Unit	100	The The
4	Fuel Gear Pump	8	Accelerator Pedal	all the second	all all all	er der	al al

#### 2.3.0445110011 Injector's Installation

SHUMAT

#### (1) .0445110011 Injector's Installation Precautions:

▲ The replacement of the fuel injector must strictly follow the electrical system, the approved pressure of the low-pressure fuel intake system, the approved pressure of the high-pressure fuel circuit system, and fuel system replacement consumables requirements (including the low-pressure fuel circuit system filter and the high-pressure fuel circuit) specified in the vehicle engine maintenance manual,

A Replacement of wearing parts of the fuel system, cleaning requirements for the connection between the fuel system and the injector, the fitting clearance of the fuel injector connection, the installation angle and tightening torque of the injector, the fitting clearance of the intake system, and the fitting clearance of the exhaust system to ensure the service life of the engine and the normal operation of the injector.

▲ When installing the fuel injector on the engine, it is necessary to clean the engine block, cylinder head and other parts connected to the fuel injector, and ensure that there is no dust, carbon deposits, water, rust spots, etc.

Before installing, check whether the fuel injector nozzle gasket has been replaced and installed on the fuel injector.

When installing the fuel injector, apply lubricant between the fuel injector, fuel nozzle sealing gasket and O-ring.

▲ Without replacing new gasket can lead to: deformation of the tight cap of nozzle, deformation of nozzle, deformation of nozzle orifice, oil leakage and air leakage, which will cause serious damage to the fuel injector and nozzle to break and cause damage to the engine.

When installing the injector on the engine, please carefully check the components related to the installation of the injector, such as the injector pressure plate, screw, injector rod and other accessories are not deformed, and install it in strict accordance with the operation steps of the engine maintenance manual.
It is forbidden to operate the bare injector for a long time in an environment with serious dust pollution and corrosion to iron products.

It is forbidden to operate the bare injector for a long time in a strong magnetic field environment.

#### 2.4. 0445110011 Injector 's Reasons for Not Working Normally

(1) There is air in the oil circuit of the engine fuel system.

(2) Vehicle oil pump oil supply system is not normal.

(3) Engine common rail system oil leakage or pressure limiting valve damage.

(4) There is a short circuit, cutting out and poor contact in the wiring harness connected to the fuel injector of the vehicle.

(5) The long-term placement of the injector causes the anti-rust oil to solidify, and the internal components are stuck or the oil holes are blocked.

• Before installing, carefully check whether other components in the common rail system except the fuel injector are damaged so as to prevent the fuel injector from not working properly after being replaced.

## 2.5. 0445110011 Injector 's Causes of Damage

(1) Didn't operate properly according to engine maintenance manual during disassembly or installation, resulting in damage to the injector .

(2) The fuel oil used for the vehicle does not meet the standard cause damage to the injector, such as: the water content in the fuel oil exceeds the standard, iron powder, aluminum powder, sulfide impurities exceed the standard, etc.

(3) The engine is not regularly maintained according to the engine maintenance manual (please refer to the vehicle maintenance manual for the maintenance mileage). For example, failure to replace the lubricating oil of the engine system for a long time will cause abnormal wear of the engine, excessive exhaust gas volume or a large amount of carbon deposits inside the engine. The filter is not replaced during maintenance or the replaced filter cannot reach the original filter standard. all above reasons can cause damage to the injector.

(4) The abrasion of the oil pump produces iron powder and aluminum powder enter the fuel injector and cause damage to the fuel injector.

(5) The deformation and abrasion of fuel tank result in iron powder or aluminum powder entering the fuel injector and causing damage to the fuel injector.

(6) The fuel injector is damaged due to replacement or adjustment of the relevant parts of the fuel injector. For example, the valve clearance does not meet the standard after the engine is repaired, the replacement or modification of the wiring harness connected to the injector fails to meet the original standard.

(7) The engine is overheated and overloaded for a long time working results in damage to the fuel injector.
(8) The injector will be damaged naturally at the end of its working life.

(9) The injector is magnetized (injector parts' magnetic exceeded) causing the injector to not work properly.
A Before replacing the fuel injector, please check the engine parts carefully according to the engine maintenance manual to avoid the fuel injector being damaged again after replacement.

## 2.6.0445110011 Injector's Technical Support Obtaining Methods

(1) Injector Technical File, visit <u>http://shumatt.com</u> to get the technical file.

(2) Injector Technical Videos

**Facebook:** Visit <u>https://www.facebook.com/hison.li</u> to get the technical videos, constantly follow can get more information.

**YouTube:** <u>https://www.youtube.com/channel/UCByvYBx7VjV\_mAfxh\_Hu-aw</u> to get the technical videos, constantly follow can get more information.

**Shumatt:** Visit <u>http://shumatt.com</u> to get the technical videos.

Mob/WhatsApp: +86 13410541523 Email : <u>ruby@shumatt.com</u> © 2022 Shenzhen Shumatt Technology Co., Ltd Tel: +8675523215133 Website : www.shumatt.com

d De

#### (3) Injector Information Query Software

TruckBook Parts EPC APP, Android/Apple App Store download and install, visit http://shumatt.com to get the download and installation tutorial

(4) Search The fuel injector test data through TruckBook Parts EPC APP.  $\mathbb{R}^{\mathbb{N}}$ 

#### 3.0445110011 Injector's Purchase and Delivery

#### 3.1.0445110011 Injector's Purchase Payment Term

Payment Terms: T/T, PayPal, Alipay, WeChat

Please contact our salesmen for specific payment information. 1000

#### . Then The and water 3.2.0445110011 Injector's Main Sales Markets

Injector main sales markets: Asia, Europe, North America, South America, Africa etc.

#### $e^{i\beta \tilde{h}^{(1)}}$ a di <sup>fan</sup> **3.3.**0445110011 Injector's Declaration Requirements

Shumatt can assist customers to provide the following documents for import customs clearance: - All contract, invoice, packing list, bill of lading, insurance policy, certificate of origin, etc.

#### **3.4.0445110011 Injector's Shipping Ways**

173 Destination in China areas: SF Express, Debon Express, the corresponding logistics company can be provided according to customer requirements in special cases.

Destinations out of China's areas: DHL, UPS, FedEx, TNT air, ocean or other shipping methods required by customers.

#### de la 3.5.0445110011 Injector's Lead time

Lead time: Send out within 3 – 7 working days after receiving payment (Except for special products and special cases).

#### 3.6.0445110011 Injector's Logistics Time for Destination Out of China's Areas

DHL Logistics Time :

Country or Region of Departure	Hong Kong, China	Other Countries or Regions of Asia	Australia and New Zealand	Europe	America	Other Countries
China's Mainland	7 Days	7 Days	8 Days	8 Days	8-12 Days	7-10 Days

#### UPS Logistics Time: Country or Region of Departure: China's Mainland

Country of Destination	Estimated Arrival Time	Country of Destination	Estimated Arrival Time	Country of Destination	Estimated Arrival Time
Japan	3 Days	UK	5-7Days	Egypt	5-7 Days
Turkey	5-7 Days	Singapore	3 Days	Switzerland	5-7 Days
Bahrain	5-7 Days	Latvia	7-10 Days	New Zealand	7-10 Days
Sri Lanka	5-7 Days	Thailand	3 Days	Austria	5-7 Days
Romania	5-7 Days	Vietnam	3-5 Days	Estonia	5-7 Days
Malaysia	3-5 Days	Israel	5-7 Days	Mexico	7-10 Days
France	5-7 Days	America	5-7 Days	United Arab Emirates	5-7 Days
Italy	5-7 Days	Netherlands	5-7 Days	Bengal	7-10 Days

Mob/WhatsApp: +86 13410541523 Email:ruby@shumatt.com © 2022 Shenzhen Shumatt Technology Co., Ltd

<u> </u>		enznen Snumatt	Technolog	gy Co., Lta	
Lebanon	5-7 Days	Philippine	3-5 Days	Greece	7-10 Days
South Korea	3 Days	Spain	5-7 Days	Stor Myanmar	5-7 Days
Canada	5-7 Days	Germany	5-7 Days	Saudi Arabia	7-10 Days
Portugal	5-7 Days	Australia	5-7 Days	South Africa	7-10 Days
Denmark	5-7 Days	Belgium	5-7 Days	Ukraine	7-10 Days
India	7-10 Days	Qatar	7-10 Days	Poland	5-7 Days
Indonesia	3-5 Days	Morocco	7-10 Days	Pakistan	7-10 Days
Kuwait	7-10 Days	The The The	al 12	1 at at .	Dr. Dr.
The logistics tim	e is for referer	nce only, subjects are ac	cording to the	actual arrival.	31 <sup>490</sup> 51

#### 3.7.0445110011 Injector's Packing

Domestic express packaging: Usually wrapped in waterproof scotch tape, such as picture No.2. International express packaging: Wrapped with waterproof yellow tape After wrapping the black protective film, such as picture No. 3.

Pallet Shipping: Use fumigation free and recycling trays that meet export requirements, and use white wrapping protective film to wrap and bind with cable ties for the outside, such as picture No. 4, also, the products can be packaged according to customers' requirements.

The packing tray is made of plastic and can be recycled.

Transparent tape, yellow tape, black wrapping protective film, white wrapping protective film are non-degradable materials, please dispose of them properly.

Minors are prohibited from using transparent tape, yellow tape, black wrapping protective film, and white wrapping protective film to avoid personal injury.





Mob/WhatsApp: +86 13410541523 Email:ruby@shumatt.com © 2022 Shenzhen Shumatt Technology Co., Ltd



SP. FR Pic No. 4 Pallet Shipping: Use pallet that meet export requirements, and use white wrapping protective film to wrap and bind with cable ties

#### 4.0445110011 Injector's Storage Standard

#### (1) Choose a suitable storage place

The warehouse and cargo yard where the fuel injector is stored should be kept clean and dry, and away from the factory buildings that generate harmful gases and dust; do not mix with acid, alkali, salt and other substances; the storage place should have a good drainage system; the cargo yard should be flattened with gravel or furnace ash etc. to enhance the water permeability of the surface layer to keep the reservoir area dry.

#### (2) Strict requirements of warehousing

Strict inspections should be carried out when the fuel injectors are put into storage, the surface cleaning work should be done well to remove water traces, oil stains, ash and other dirt, remove the rust and do antirust treatment in time. Packaged injectors must be protected from damage.

#### (3) Keep the warehouse dry and preventing moisture

The relative humidity is usually below 70% for the fuel injectors placed in the room, and the corrosion and h 1895 T of the fuel injectors is significantly reduced. 1000 all's 95<sup>5</sup>

Injectors must be stored in the warehouse, and they are forbidden to store in the same warehouse with commodities with high water content. SPRING SPREAT

## (4) Stack Properly

After the injector is exposed to rain, the corrosion rate will increase significantly. The purpose of sealing is to isolate the injector from rainwater and humid air, so the warehouse window should be checked in time to avoid rainwater entering the warehouse - Sharr

If the fuel injector package is damaged, it should be repaired or replaced; when the package is damp, the packaging material should be dried; if the original anti-corrosion and oil applied at the factory is found to be damaged or dried up, it should be cleaned and re-applied oil in time.

It is forbidden to leave the injector exposed in the air for a long time. - 100<sup>0475</sup>

Mob/WhatsApp: +86 13410541523 Email:ruby@shumatt.com © 2022 Shenzhen Shumatt Technology Co., Ltd

4 19 <sup>6 6</sup> 7

▲ \_ It is forbidden to store acid, alkali, salt and other substances together with the injector.

NOR CL

. 1997 - C

- 18 E

The unpacked fuel injector must be rust-proof during secondary storage.

## 5. Company Information



5.1. Company Introduction Chinese Name: 深圳市舒马特科技有限公司 English Name: Shenzhen Shumatt Technology Co., Ltd

**Mob Phone/WeChat:** +86-13410541523

HK Telephone: +852-67653519

Telephone: +86-755-23215133

Email: ruby@shumatt.com

Website: www.shumatt.net

Shenzhen Office: 11-12, Floor 14, Building 13, Qinchengda Building, Exit A, Honglang North Subway Station, Bao'an District, Shenzhen, China's Mainland

STRUMPT STRUMPT

SPERMENT

SAUDAT

Shenzhen Office: Room 428-430, Building B, Huafeng Zhigu Technology Industrial Park, Exit B, Fuyong Metro Station, Bao'an District, Shenzhen, China's Mainland

Hong Kong Office: Jianfa Street Industrial Zone, Tuen Mun, New Territories, Hong Kong, China

Mob/WhatsApp: +86 13410541523 Email : <u>ruby@shumatt.com</u> © 2022 Shenzhen Shumatt Technology Co., Ltd

After-sales Service Address: Please contact our salesmen to obtain and provide the corresponding product maintenance reasons (Reference: <u>1.10.0445110011</u> Injector Warranty Instructions )

1.18

No. Name		WeChat/WhatsApp	Email	Facebook	YouTube
1	Ruby	+86-13410541523	ruby@shumatt.com	Hison Li	Hison Li
2,500	lvy south	+86-18025299821	sales@shumatt.com	Ivy Shumatt	Shumatt IVY
3	Rebecca	+86-18025349821	sales01@shumatt.com	Rebecca SHUMATT	SHUMATT Rebecca
4	Janny	+86-18028749821	sales02@shumatt.com	Janny shumatt	Janny Shumatt
5	Sam	+86-13316859821	Sales8@shumatt.com	Shumatt Sam	Sam Shumatt
6	Natalie	+86- 18938945856	sales15@shumatt.com	Shumatt Natalie	Lin Natalie
7	Ada	+86-1342286353	sales5@shumatt.com	Shumatt Ada	Ada Shumatt
8	Hison Li	+86-18318811871	web@shumatt.com	Hison Li	Hison Li
9	Mecca	+86-18938948618	sales11@shumatt.com	Shumatt Mecca	Shumatt Mecca
10	Eric	+86 18319033618	sales3@shumatt.com		
11	Wayne ( Joaquín en español )	+86-13316959821	wayne@shumatt.com	shumattwayne	Wayne Shumatt
12	Sylvia	+86 18312499884	sales6@shumatt.com	Star Star	3 N
		Visit http://shumatt.com to ob	tain the latest information of sales-m	en	
		PS: Shumatt's sales-men's e	mails are all end with @shumatt.com		1 1

#### 6. Copyright Statement

an Ch

150

The copyright of any contents (including but not limited to parameters, data, text, charts, images, sounds or videos, etc.) provided in "0445110011 Injector CRI1-13 Technical File" belong to Shenzhen Shumatt Technology Co., Ltd. Without the prior written permission of Shenzhen Shumatt Technology Co., Ltd., you are not allowed to modify any contents in "0445110011 Injector CRI1-13 Technical File" in any way. At the same time, any conditions to spread, re-post, display the contents of "0445110011 Injector CRI1-13 Technical File" should indicate that the cited article is from Shenzhen Shumatt Technology Co., Ltd., Any actions failure to follow above conditions to use "0445110011 Injector CRI1-13 Technical File" will violate the "Copyright Law of the People's Republic of China" and other laws and regulations and the provisions of relevant international conventions.

 $S_{\rm eff}$ 

Mob/WhatsApp: +86 13410541523 Email:ruby@shumatt.com © 2022 Shenzhen Shumatt Technology Co., Ltd