





625C Series 28390393 Injector Control Valve Technical File

ADDATE ADDATE ADDATE ADDATE CONTENT ADDATE ADDATE

| -31 | Store . | - Barrer | a start and a start and a start | -90° | Sec. | -Store | Stor. | 300 | 200 | - Starten - | State - | - 90% |
|-----------------------|------------------------|--------------------|---|---------------------|------------------------|-------------|----------------------|---------------------------|-------------------|-------------|--|----------------------------|
| 625C S | eries 283 | 90393 Inj | jector Co | ntrol Valv | e Techni | cal File | | | | | | 3 |
| | 90393 Inj | | | | | | | | | | | |
| S ^{R0, 1} .: | 1.283903 | 393 Injec | tor Contr | ol Valve's | Basic In | formatio | n | Star- | Star. | 37.00 | - 98 ⁰⁰⁰ | 3 |
| 1.2 | 2.283903 | 893 Injec | tor Contr | ol Valve's | Matchir | ng Inform | ation | | | | | 3 |
| $\sim 10^{-1.3}$ | 3.283903 | 393 Injec | tor Contr | ol Valve's | Specific | ations an | d Dimen | sions | | | | 3 |
| 1.4 | 4.283903 | 393 Injec | tor Contr | ol Valve's | Quality | Control | Sar. | .30. | 30. | 301 | 360. | 3 |
| 1. | 5.283903 | 393 Injec | tor Contr | ol Valve's | Custom | ized Serv | ice | تصييبيا | | | (| 13 |
| St. 1.0 | 5.283903 | 393 Injec | tor Contr | ol Valve's | Packing | List | St. St. | Strain. | St. Store | A.S. | . 53 ³⁰⁰ . | 6 |
| 1.1 | 7.283903 | 193 Iniec | tor Contr | ol Valve's | Warrant | tv Instruc | tions | | | | | 7 |
| | 8.283903 | 393 Iniec | tor Contr | ol Valve's | Manufa | , cturer | | 1. | 10 ⁵¹ | a alla | n an the second se | |
| 2 2839 | 0393 Inje | ector Cor | ntrol Valv | e Technic | al Sunno | rt. | \$1° | 344 | See. | Sur. | 34 | 8 |
| | 1.283903 | | | | | | | | | | | |
| 31 ¹⁰⁷⁷ | 2.283903 | 893 Injec | tor Contr | ol Valve's | Installat | ion | -Stoller | and a start of the second | -State | S. S. | S. S. | 9 |
| | 3.283903 | | | | | | | | | | | |
| 3 2839 | 0393 Inje | ector Cor | trol Valv | e's Purch | ase and I | Delivery | t Obtain | | - 6 ²⁵ | - 68 | - A | 15 |
| 3.2037 | 1.283903 | | tor Contr | | Durchas | o Paymo | nt Torms | | 34 | 34 | 24 | 16 |
| | 2.283903 | - | | | | | | | | | | |
| all a | 3.283903 | 202 Injec | tor Contr | ol Valve's | Doclara | tion Pog | uromont | e al allanti | A Ser | A. Marine | S. | 16 |
| | | | | | | | | | | | | |
| 3.4 | 4.283903 5.283903 | | | of valves | s Shippin | g vvays | | | | 1.00 | | 10 |
| - CA - | 25.4 L | 1990 B | 2012 | 2011 | - 2020 | 1 2 8 W 1 1 | 200 B | - C24 - 1 | - CAL | 24.1 | 2012 | 1000 |
| | 6.283903 | - | | | | | | | | | | |
| (a) 100000 (a) | 7.283903 | - ST- | A 1002 | A 1997 | | A 1997 | A. 1997 | 10. TO 10. | - 5000° | A 500 | A 2007 | |
| | 0393 Inje | | | | | | | | | | | |
| 5.Comp | oany Infor 1. Compa | mation | | | | | | | Den 1 | | | |
| sh ⁰⁰⁵ . | 1. Compa | ny Introc | luction | 51 ⁰⁰⁰ | - 51 ⁰ -177 | -94-122 i | | | | | | 18 |
| 5., | 2. Sales-m | nen's Cor | itact info | rmation | | | | | | | | 19 |
| 6. Copy | right Stat | ement |) | | | | | | | |) | 19 |
| \$1°* | Str. | 35 | 97° | \$77 | \$77 | 20- | \$1°* | 24 | 34 | 37 | 1977 - | 247 |
| SPAURON | a sa | 5 | T SPEARAT | SPRINT | 5 | i set | l at | i set | | | 5 | ÷ |
| - Staller | SAMA | SHLOW | 3 and | States. | STRUMENT | SPECTRET | SPECTORY | SPUDAT | SAUDAT | SPACE | SPREAM | $\wp)^{(0)}$ |
| | | | | | | | | | | | | |
| Stone, | T SPLEIDT | SPREAM | SPERMIT | SPERMIT | 518,5591 | SHADAT | SPERAT | SHART | SHANN | SPASSAT | SHREEDST | 5 . 181 |
| 20.00 | -30 | -22 | Sec. | 35.00 | Sim | -Sto. | 210 | 21.0 | 201 | -Sil | 32.00 | $\otimes^{\mathbb{N}}$ |
| SINDS' | SPR. DON'T | SPARST | 5 513-5157 | SPRENT | SPREAM | Steront | SPURIST | SPARSA | SPATIST | 5 2 | 5 2 | 5 |
| - alister | St. Stor | - All and a second | Street. | -38-200°. | Stran. | -Strace. | al ^{ysor} . | SIN SOC. | Stran. | SPLEET | SPLEED | $\otimes^{\mathbb{Q}_{i}}$ |
| | | | - | | | | | | | - | | |
| SPUTES | SPR-SPR-ST | SPACES I | STRATISTY | SPARAT | STREET | Sterest | STREET | STATEST | SPARANT | SPRETURT | 5132051 | S |
| 31,00 | Stor. | Store. | Store. | - Store | - Star | ditter. | diller. | S244 | See. | See. | Store. | 48 |
| | | | 5 | | | | | | | | | |
| | | | | ctil ^{2,1} | | | | - 198 ²⁴ | | | | |

SHUMATT Shenzhen Shumatt Technology Co., Ltd

625C Series 28390393 Injector Control Valve Technical File

1. 28390393 Injector Control Valve's Introduction

1.1.28390393 Injector Control Valve's Basic Information

| Title | China Made New 28390393 Injector Control Valve |
|-------|--|
| SKU1 | G1N50028390393 |
| | |

1.2.28390393 Injector Control Valve's Matching Information

(1) Injector Control Valve's Application to Car Model

| Injector Part Number | Car Model | OE Number | OE Number | OE Number |
|----------------------|-------------|-----------|-------------|--------------|
| the Star Star | Then Then 3 | The The | dan Man Man | i The little |

(2) Injector Control Valve's Part Number Common Writing 28390393, 9308-625C, 9308Z625C

1.3.28390393 Injector Control Valve's Specifications and Dimensions

Injector Control Valve Size: 4cm*4 cm *3 cm

Injector Control Valve Box Size: 7 cm *5 cm *3 cm

Injector Control Valve Packing Size: 26 cm *10 cm

Injector Control Valve Net Weight: 0.03kg

Injector Control Valve Gross Weight: 0.05kg

Injector Control Valve Quality: China Made Brand New Injector Control Valve COLDER T

MOQ: 4 Pieces

1.4.28390393 Injector Control Valve's Quality Control

(1) Injector Control Valve Testing

All injector control valve spare parts are tested for electrical characteristics, accuracy, high temperature, low temperature, withstand voltage, leakage, durability, and various working conditions.

(2) Injector Control Valve Inspection

The factory inspection of the injector control valve is undergone full inspection, random inspection, and batch inspection three inspections. Different brands of test benches are used to test the same fuel injector control valve for a total of no less than three times for factory inspection, and injector control valve installation and test environment are progressed in dust-free workshop.

(3) Injector Control Valve Installation

MAR.

When assembling the valve body and valve core of the control valve, we strictly follow the standard technical indicators of the gap between the valve body and the valve core to assemble so that to ensure that each control valve meets the factory standard and use standard.

- Stall

1.5.28390393 Injector Control Valve's Customized Service

(1) Injector Control Valve's Customized Service: Meet the customized needs of OEM manufacturers for control valve core, control valve body, part number lettering, QR code engraving, control valve box, VCI anti-rust bag and label customized etc,.

Shenzhen Shumatt Technology Co., Ltd SHUMATT SHUMATT Custom Valve Core (white color with two grooves) Custom Valve Core (white color without coating) SHUMATT SHUMATT Custom Valve Core (black color with coating) Custom Valve Body (single groove) SHUMATT SHUMATT ⁵Custom Valve Body Part Number Engraving "Custom Valve Body (three grooves) SPERSON SPARA SALUTION SPARAT SPLEED SPERMENT STUTTER SI^{AJSE} $- \otimes^{(0)}$ STRUCTURE STR

Mob/WhatsApp: +86 13410541523 Email : <u>ruby@shumatt.com</u> © 2022 Shenzhen Shumatt Technology Co., Ltd

. and

Tel: +8675523215133 Website : www.shumatt.com

4/19

and a state of the state of the

HUMATT



The purchase of injector control valves are not less than 100 pieces.

The purchase of injector control valves engraving contents are not less than 100 pieces.

Customized products involve the need of specify logo, the OEM manufacturer needs to provide trademark authorization and the sample of logo image file.

• Once the customized injector control valve is sold, it cannot be returned or exchanged if there is no quality problems.

Mob/WhatsApp: +86 13410541523 Email : <u>ruby@shumatt.com</u> © 2022 Shenzhen Shumatt Technology Co., Ltd and the

Shenzhen Shumatt Technology Co., Ltd 1.6.28390393 Injector Control Valve's Packing List (1) Injector Control Valve Spare Parts List



bag to avoid personal injury.

Control valve fixture, control valve box are recyclable accessories that can be reused.

Mob/WhatsApp: +86 13410541523 Email : <u>ruby@shumatt.com</u> © 2022 Shenzhen Shumatt Technology Co., Ltd

VCI anti-rust bag is non-degradable materials, please dispose of them properly

after using

1.7.28390393 Injector Control Valve's Warranty Instructions

(1) Injector Control Valve Warranty Conditions and Instructions It is necessary to provide pictures, videos of injector control valve or test reports of injector control valve inspection equipment as evidence to feed back to the salesman.

Injector control valve abnormal conditions are properly explained such as: 1.Black smoke, 2. Engine shake, 3. Difficulty starting the engine, 4. Engine noise, 5. oil leakage etc.

Above problems also may cause by the incorrect installation of injector, if the problems are confirm to be product's problems after tested by Shumatt, it is within the warranty coverage.

(2) Injector Control Valve Warranty Coverage

After customers receive the 28390393 injector control valve within 15 days , if there is a performance failure and the product has no appearance damage, customer can choose to replace it or repair it;

If the 28390393 injector control valve has performance problems during the warranty period (3 months), and it is confirmed to be product's problems after being tested, you can contact our salesmen to replace the same model or a reworked product with the same performance for free;

If the injector control valve has obvious scratches, it can only be repaired and it will be returned as it is if the product is confirmed to be fault-free.

▲ Tips: For products not within warranty period, our company can provide paid maintenance services. For products after paid repaired, the same performance problem will have a free warranty period within 3 months from the date of repairing.

(3) Injector Control Valve Out of Warranty Coverage

The injector control valve is artificially damaged due to assembly errors during the process of assembling. The warranty period has expired.

Injector injector control valve failure caused by high temperature, high pressure, humidity, rain and snow, saline-alkali land, earthquake, and used in abnormal environment.

Injector injector control valve damage caused by man-made reasons (throwing, strong magnetic field magnetization, set fire).

Injector injector control valve failure or injector damage caused by non-injector injector control valve's design, technology, manufacturing, quality and other issues.

Injector injector control valve failure due to system pressure exceeding system approved pressure.

Injector injector control valve failure caused by impurities (water, lead, aluminum powder, iron powder, sulfide) in the system fuel exceeding the standard requirements.

Injector injector control valve failure caused by not installing according to the tightening torque specified in injector maintenance manual (the tightening torque is too large or too small).

Injector injector control valve failure caused by not following the installation angle specified in injector maintenance manual.

Injector injector control valve failure caused by not following the cleaning requirements specified in injector maintenance manual.

Injector injector control valve failure caused by failure to replace consumable parts as specified in injector maintenance manual.

1.8.28390393 Injector Control Valve's Manufacturer

Injector Control Valve's Manufacturer: Shenzhen Shumatt Technology Co., Ltd SALDAT SHARATT SPERME SPRETERTY


2.28390393 Injector Control Valve Technical Support

2.1.28390393 Injector Control Valve's Inspection

SPUDATI

311305 (1) Check and see if there is fray on the sealing surface of control valve and the control valve core.

st^{ale}

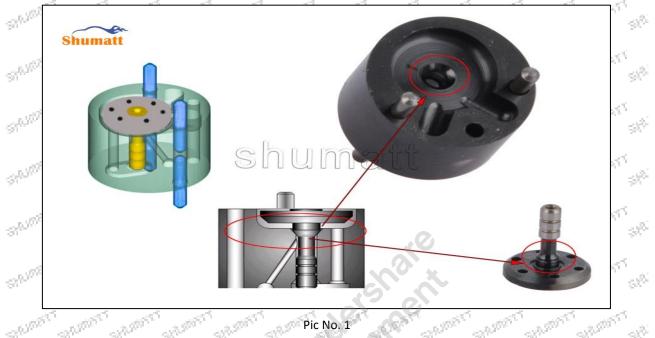

- (2) Check whether the armature stroke (CRT220) of the control valve is within the range of 30~70µm. The lift of the armature will affect the fuel injection quantity at each point. The greater the armature lift,
- $S^{0,0}$ the greater the fuel injection volume, if the armature stroke is out of range, please replace control valve in time.




Mob/WhatsApp: +86 13410541523 Email:ruby@shumatt.com © 2022 Shenzhen Shumatt Technology Co., Ltd


2.2.28390393 Injector Control Valve's Installation

- (1) Before install the orifice plate, clean it in an ultrasonic cleaning machine for 3-5 minutes so that to make the dirt, anti-rust oil oxide, paraffin base, naphthenic base, intermediate base, salt, lead naphthenate, zinc naphthenate, sodium petroleum sulfonate, barium petroleum sulfonate, calcium petroleum 38^{1,251} -21-⁵⁷² sulfonate, tallow diamine trioleate and rosin amine shedding fall off. $\mathcal{A}^{(0)}$
- Use compressed air to clean up the cleaning fluid attached to the surface of the cleaned orifice plate to (2) State and the meet the use standard. 98⁹⁹ $\mathbb{S}^{\mathbb{N}}$
- (3) Place the injector solenoid valve into the injector house, see as Pic No.1







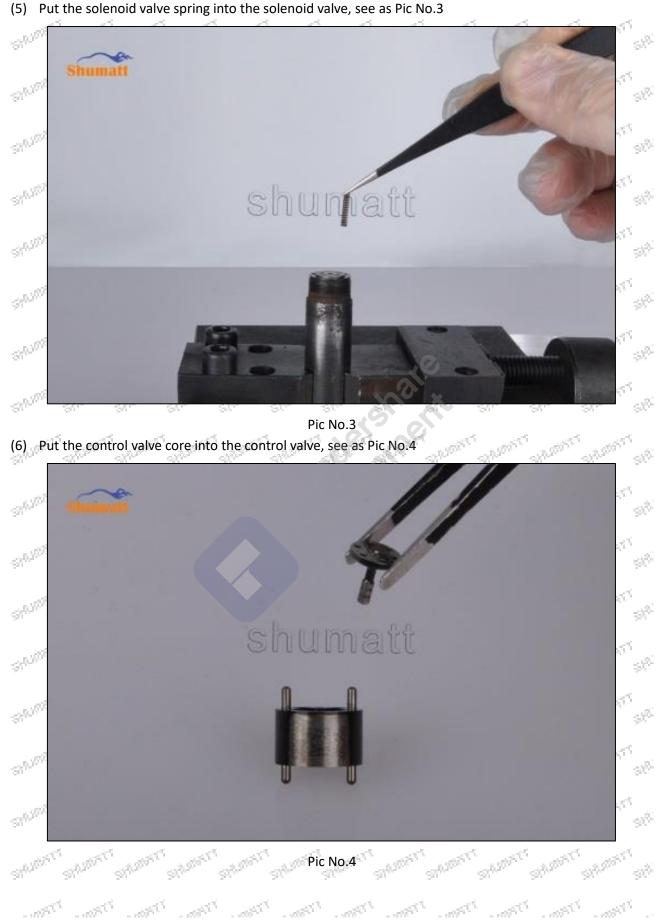



Shenzhen Shumatt Technology Co., Ltd SHUMATT (7) Use the injector stroke measuring tool (CRT220) to measure whether the gap between the control valve and the armature is in the range of 30~70µm, see as Pic No.5 178056 ALT BEER ARRES 19.20577 $\otimes^{(0)}$ Stol Shumatt $\otimes^{[0]}$ 67 sah^{ja} $\otimes^{(0)}$ 58^{8,58} $\otimes \tilde{\mathcal{C}}^{(i)}$ SALIN SAL st^{ade} 8^{40%} $\varphi_{i}^{(0)}$ st^{yte} $\otimes^{(0)}$ SPARST WING C SPLEED SPREAT 15000 Pic No.5 Pic No.5 (8) Install the control valve in the injector house, see as Pic No.6 SPERIOT $\otimes^{(0)}$ sahijî $\phi^{(i)}$ $S^{(n)^{(i)}}$ $\varphi_{i}^{(2)}$ sh^{yî} ϕ^{0} st^{all} shuma States $\otimes^{\mathbb{R}^{l}}$ -31^{9,50} $\otimes^{[0]}$ sah^{ga} $\otimes^{(i)}$

Mob/WhatsApp: +86 13410541523 Email : <u>ruby@shumatt.com</u> © 2022 Shenzhen Shumatt Technology Co., Ltd Tel: +8675523215133 Website : www.shumatt.com

11/19

SHUMFITT Shenzhen Shumatt Technology Co., Ltd

(9) Install the injector nozzle spacer on the control valve, see as Pic No.7



Mob/WhatsApp: +86 13410541523 Email : <u>ruby@shumatt.com</u> © 2022 Shenzhen Shumatt Technology Co., Ltd



(11) Put the nozzle needle valve into the nozzle, see as Pic No.9



Mob/WhatsApp: +86 13410541523 Email : <u>ruby@shumatt.com</u> © 2022 Shenzhen Shumatt Technology Co., Ltd Tel: +8675523215133 Website : www.shumatt.com

13 / 19





 $S^{0,j^{(j)}}$ $\mathcal{G}^{(0)}$ $S^{\mathbb{R}^{2^{\mathbb{N}}}}$ Shumatt $\varphi \hat{V}^{h}$ st^{adi} $\phi^{(0)}$ st^{hije} st^{all} $\otimes^{\mathbb{N}^{1}}$ 3^{6,06} $\otimes l^{(0)}$ $\mathcal{O}_{\mathcal{O}}$ sah^{ga} $\otimes^{(i)}$ sa^{hjik} . mart Pic No.12 THE THE STREET THE THE THE THE THE

Mob/WhatsApp: +86 13410541523 Email : <u>ruby@shumatt.com</u> © 2022 Shenzhen Shumatt Technology Co., Ltd



(15) Insulation test. Test whether the injector is insulated from the shell, use (500v, 10M or higher voltage) for testing, see as Pic No.13 SUDET! A.87877 -28-57



(a) LEAK TEST

Test Result

 $\mathcal{O}_{\mathcal{O}}$ 1.The oil return is not sealed: Leakage between control valve and armature.

May Lead To:

1.Leaky oil return may lead to large oil return volume, the nozzle oil leakage and can not build up pressure, which cause to injector failure working.

Solution:

Check the control valve's sealing condition or change control valve.

2.3.28390393 Injector Control Valve's Technical Support Obtaining Methods

(1) Injector Control Valve Technical File, visit <u>http://shumatt.com</u>to get the technical file.

(2) Injector Control Valve Technical Videos

Facebook: Visit https://www.facebook.com/hison.li to get the technical videos, constantly follow can get more information.

188 S

YouTube: Visit https://www.youtube.com/channel/UCByvYBx7VjV mAfxh Hu-aw to get the technical videos, constantly follow can get more information.

Shumatt: Visit http://shumatt.com to get the technical videos.

(3) Injector Control Valve Information Query Software

TruckBook Parts EPC APP, Android/Apple App Store download and install, visit http://shumatt.com to get -30^{.20} AND STR the download and installation tutorial

(4) Search injector control valve test data through TruckBook Parts EPC APP.

3.28390393 Injector Control Valve's Purchase and Delivery

Mob/WhatsApp: +86 13410541523 Email:ruby@shumatt.com © 2022 Shenzhen Shumatt Technology Co., Ltd · martin

SHUMATT Shenzhen Shumatt Technology Co., Ltd

3.1.28390393 Injector Control Valve's Purchase Payment Terms

Please contact our salesmen for specific payment information. Payment Terms: T/T, PayPal, Alipay, WeChat

3.2.28390393 Injector Control Valve's Main Sales Markets

Injector control valve main sales markets: Asia, Europe, North America, South America, Africa etc.

3.3.28390393 Injector Control Valve's Declaration Requirements

155 Shumatt can assist customers to provide the following documents for import customs clearance: contract, invoice, packing list, bill of lading, insurance policy, certificate of origin, etc.

19 C -

3.4.28390393 Injector Control Valve's Shipping Ways

Destination in China areas: SF Express, Debon Express, the corresponding logistics company can be provided SIN THE SING A.STORY C & TINKY according to customer requirements in special cases.

Destinations out of China's areas: DHL, UPS, FedEx, TNT air, ocean or other shipping methods required by SPACENT SHUDDATT customers. THE TOPY I SAMAT

3.5.28390393 Injector Control Valve's Lead time

Lead time: Send out within 3 - 7 working days after receiving payment (Except for special products and STUD! -Stall -Sth Star 3.⁹⁰ special cases). A.S.

NOS

______?²

3.6.28390393 Injector Control Valve's Logistics Time for Destination Out of China's Areas

DHL Logistics Time :

| Country or Region of Departure | Hong Kong, China | Other Countries or Regions of Asia | Australia and New Zealand | Europe | America | Other Countries |
|-----------------------------------|---------------------|---------------------------------------|------------------------------|--------|-----------|--------------------|
| China's Mainland | 7 Days | 7 Days | 8 Days | 8 Days | 8-12 Days | 7-10 Days |

UPS Logistics Time: Country or Region of Departure: China's Mainland

| Country of Destination | Estimated Arrival Time | Country of Destination | Estimated Arrival Time | Country of Destination | Estimated Arrival Time |
|---------------------------|---------------------------|------------------------|---------------------------|------------------------|---------------------------|
| Japan | 3 Days | UK | 5-7 Days | Egypt | 5-7 Days |
| Turkey | 5-7 Days | Singapore | 3 Days | Switzerland | 5-7 Days |
| Bahrain | 5-7 Days | Latvia | 7-10 Days | New Zealand | 7-10 Days |
| Sri Lanka | 5-7 Days | Thailand | 3 Days | Austria | 5-7 Days |
| Romania | 5-7 Days | Vietnam | 3-5 Days | Estonia Estonia | 5-7 Days |
| Malaysia | 3-5 Days | Israel | 5-7 Days | Mexico | 7-10 Days |
| France | 5-7 Days | America | 5-7 Days | United Arab Emirates | 5-7 Days |
| Italy | 5-7 Days | Netherlands | 5-7 Days | Bengal | 7-10 Days |
| Lebanon | 5-7 Days | Philippine | 3-5 Days | Greece | 7-10 Days |
| South Korea | 3 Days | Spain | 5-7 Days | Myanmar S | 5-7 Days |
| Canada | 5-7 Days | Germany | 5-7 Days | Saudi Arabia | 7-10 Days |
| Portugal | 5-7 Days | Australia | 5-7 Days | South Africa | 7-10 Days |
| Denmark | 5-7 Days | Belgium | 5-7 Days | Ukraine | 7-10 Days |
| India | 7-10 Days | Qatar | 7-10 Days | Poland | 5-7 Days |
| Indonesia | 3-5 Days | Morocco | 7-10 Days | Pakistan | 7-10 Days |
| Kuwait | 7-10 Days | the the the | al a | 1 d d . | d al |

The logistics time is for reference only, subjects are according to the actual arrival.

3.7.28390393 Injector Control Valve's Packing

Mob/WhatsApp: +86 13410541523 Email:ruby@shumatt.com © 2022 Shenzhen Shumatt Technology Co., Ltd

Domestic express packaging: Usually wrapped with waterproof scotch tape, such as picture No.1. **International express packaging:** Wrapped with waterproof yellow tape After wrapping the black protective film, such as picture No. 2.

Pallet Shipping: Use fumigation free and recycling trays that meet export requirements, and use white wrapping protective film to wrap and bind with cable ties for the outside, such as picture No. 4, Also, the products can be packaged according to customers' requirements.

- The packing tray is made of plastic and can be recycled.
- ▲ Transparent tape, yellow tape, black wrapping protective film, white wrapping protective film are non-degradable materials, please dispose of them properly.
- Minors are prohibited from using transparent tape, yellow tape, black wrapping protective film, and white wrapping protective film to avoid personal injury.



Pallet Shipping: Use pallet that meet export requirements, and use white wrapping protective film to wrap and bind with cable ties

4.28390393 Injector Control Valve's Storage Standard

Mob/WhatsApp: +86 13410541523 Email : <u>ruby@shumatt.com</u> © 2022 Shenzhen Shumatt Technology Co., Ltd

(1) Choose a suitable storage place

The warehouse and cargo yard where injector control valve is stored should be kept clean and dry, and away from the factory buildings that generate harmful gases and dust; do not mix with acid, alkali, salt and other substances; the storage place should have a good drainage system; the cargo yard should be flattened with gravel or furnace ash etc. to enhance the water permeability of the surface layer to keep the reservoir area dry.

(2) Strict requirements of warehousing

Strict inspections should be carried out when injector control valves are put into storage, the surface cleaning work should be done well to remove water traces, oil stains, ash and other dirt, remove the rust and do anti-rust treatment in time. The packed injector control valves must be protected from being damaged.

all the

(3) Keep the warehouse dry and preventing moisture

The relative humidity is usually below 70% for injector control valves placed in the room, and the corrosion of injector control valves is significantly reduced.

Injector control valves must be stored in the warehouse, and they are forbidden to store in the same warehouse with commodities with high water content.

(4) Stack Properly

5.Company Information

- A After the injector control valve is exposed in rain, the corrosion rate will increase significantly. The purpose of sealing is to isolate the injector control valve from rainwater and humid air, so the warehouse window should be checked in time to avoid rainwater entering the warehouse
- If injector control valve package is damaged, it should be repaired or replaced; when the package is damp, the packaging material should be dried; if the original anti-corrosion and oil applied at the factory is found to be damaged or dried up, it should be cleaned and re-applied oil in time.
 - It is forbidden to leave the injector control valve exposed in the air for a long time.
 - ▲ It is forbidden to store acid, alkali, salt and other substances together with the injector control valve.
- The unpacked injector control valve must be rust-proof during secondary storage.



Chinese Name: 深圳市舒马特科技有限公司

Mob/WhatsApp: +86 13410541523 Email : <u>ruby@shumatt.com</u> © 2022 Shenzhen Shumatt Technology Co., Ltd

SHUMATT Shenzhen Shumatt Technology Co., Ltd

English Name: Shenzhen Shumatt Technology Co., Ltd.

Mob Phone/WeChat: +86-13410541523

HK Telephone: +852-67653519

Telephone: +86-755-23215133

Email: ruby@shumatt.com

Website: www.shumatt.net

Shenzhen Office: 11-12, Floor 14, Building 13, Qinchengda Building, Exit A, Honglang North Subway Station, Bao'an District, Shenzhen, China's Mainland

Shenzhen Office: Room 428-430, Building B, Huafeng Zhigu Technology Industrial Park, Exit B, Fuyong Metro Station, Bao'an District, Shenzhen, China's Mainland

Hong Kong Office: Jianfa Street Industrial Zone, Tuen Mun, New Territories, Hong Kong, China **After-sales Service Address:** Please contact our salesmen to obtain and provide the corresponding product maintenance reasons (Reference: <u>1.7. 28390393 Injector Control Valve's Warranty Instructions.</u>)

| 5.2. Sales | -men's | Contact | Information | đ |
|------------|--------|----------|-------------|------|
| 0 | | 00110100 | | . W. |

| No. | Name | WeChat/ WhatsApp | Email | Facebook | YouTube |
|--------|---------------------------------|--------------------------------|---|--------------------|-----------------|
| 1 | Ruby | +86-13410541523 | ruby@shumatt.com | Hison Li | Hison Li |
| 2 | lvy | +86-18025309821 | sales@shumatt.com | lvy Shumatt | Shumatt IVY |
| 3.00 | Rebecca | +86-18025349821 | sales01@shumatt.com | Rebecca SHUMATT | SHUMATT Rebecca |
| 4 | Janny | +86-18028749821 | sales02@shumatt.com | Janny shumatt | Janny Shumatt |
| 5 | Sam | +86-13316859821 | Sales8@shumatt.com | Shumatt Sam | Sam Shumatt |
| 6 | Natalie | +86- 18938945856 | sales15@shumatt.com | Shumatt Natalie | Lin Natalie |
| 7 | Ada Shi | +86-1342286353 | sales5@shumatt.com | Shumatt Ada | Ada Shumatt |
| 8 | Hison Li | +86-18318811871 | web@shumatt.com | Hison Li | Hison Li |
| 9 | Mecca | +86-18938948618 | sales11@shumatt.com | Shumatt Mecca | Shumatt Mecca |
| 10 | Stric State | +86 18319033618 | sales3@shumatt.com | 34.50 St.200 | 37.20 St. |
| 11 | Wayne (Joaquín en español) | +86-13316959821 | wayne@shumatt.com | shumattwayne | Wayne Shumatt |
| 12,5,5 | Sylvia | +86 18312499884 | sales6@shumatt.com | 125 - R.C. | all all |
| 30.0 | 201. 201. | /isit http://www.shumatt.com t | o obtain the latest information of sale | smen | 201. 201. |

PS: Shumatt's sales-men's emails are all end with @shumatt.com

6. Copyright Statement

The copyright of any contents (including but not limited to parameters, data, text, charts, images, sound, videos, etc.) provided in "625C Series 28390393 Injector Control Valve Technical File" belong to Shenzhen Shumatt Technology Co., Ltd. Without the prior written permission of Shenzhen Shumatt Technology Co., Ltd. Without the prior written permission of Shenzhen Shumatt Technology Co., Ltd., you are not allowed to modify any contents in "625C Series 28390393 Injector Control Valve Technical File" in any way. At the same time, any conditions to spread, re-post, display the contents of "625C Series 28390393 Injector Control Valve Technical File" should indicate that the cited article is from Shenzhen Shumatt Technology Co., Ltd., Any actions failure to follow above conditions to use "625C Series 28390393 Injector Control Valve Technical File" will violate the "Copyright Law of the People's Republic of China" and other laws and regulations and the provisions of relevant international conventions.

Terms - Terms

Mob/WhatsApp: +86 13410541523 Email : <u>ruby@shumatt.com</u> © 2022 Shenzhen Shumatt Technology Co., Ltd