

093164-4750 Injector Nut Technical File

SKU: G1Y20931644330



093164-4750 Injector Nut Technical File**Content**

| | |
|---|----|
| 1. 093164-4750 Injector Nut Introduction | 2 |
| 1.1. 093164-4750 Injector Nut Basic Information | 2 |
| 1.2. 093164-4750 Injector Nut Common Part Number | 2 |
| 1.3. 093164-4750 Injector Nut Parameter | 2 |
| 1.4. 093164-4750 Injector Nut Specifications And Dimensions | 2 |
| 1.5. 093164-4750 Injector Nut Quality Control | 2 |
| 1.6. 093164-4750 Injector Nut Customized Service | 3 |
| 1.7. 093164-4750 Injector Nut Packing List and Package Size | 3 |
| 1.8. 093164-4750 Injector Nut Testing Standard and Certificate | 5 |
| 1.9. 093164-4750 Injector Nut Warranty Instructions | 5 |
| 1.10. 093164-4750 Injector Nut Manufacturer | 6 |
| 2. 093164-4750 Injector Nut Technical Support | 6 |
| 2.1. 093164-4750 Injector Nut Use location | 6 |
| 2.2. 093164-4750 Injector Nut Installation | 8 |
| 2.3. 093164-4750 Injector Nut Not Working Normally | 9 |
| 2.4. 093164-4750 Injector Nut Causes of Being Damaged | 9 |
| 2.5. 093164-4750 Injector Nut Technical Support Obtaining Methods | 10 |
| 2.6. 093164-4750 Injector Nut measuring tool | 10 |
| 2.7. 093164-4750 Injector Nut measuring Measurement steps | 11 |
| 3. 093164-4750 Injector Nut Purchase and Delivery | 12 |
| 3.1. 093164-4750 Injector Nut Purchase Payment Term | 12 |
| 3.2. 093164-4750 Injector Nut Main Sales Markets | 12 |
| 3.3. 093164-4750 Injector Nut Declaration Requirements | 13 |
| 3.4. 093164-4750 Injector Nut Shipping Ways | 13 |
| 3.5. 093164-4750 Injector Nut Lead Time | 13 |
| 3.6. 093164-4750 Injector Nut Logistics Time for Destination Out of China's Areas | 13 |
| 3.7. 093164-4750 Injector Nut Packing | 14 |
| 4. 093164-4750 Injector Nut Storage Standard | 15 |
| 5. Company Information | 16 |
| 5.1. Company Introduction | 16 |
| 5.2. Salesmen's Contact Information | 17 |
| 6. Copyright Statement | 17 |

093164-4750 Injector Nut Technical File**1. 093164-4750 Injector Nut Introduction****1.1. 093164-4750 Injector Nut Basic Information**

| Title | 093164-4750 Injector Nut | Quality |
|-------|--------------------------|----------------|
| SKU | G1Y20931644330 | China Made New |

1.2. 093164-4750 Injector Nut Common Part Number**(1) Injector Nut Exchange Information**

| Injector Nut Part Number | OE Number | OE Number |
|--------------------------|-------------|-----------|
| 095000-6353 | 095000-6593 | / |

(2) Injector Nut Application Information

| Oil Pump Part Number | Vehicle Brand | Engine Model | Cylinder | Voltage |
|----------------------|---------------|--------------|----------|---------|
| HINO | / | 0601 | / | / |
| HINO | / | 0607 | / | / |

(3) Injector Nut Common Writing

093164-4750

1.3. 093164-4750 Injector Nut ParameterAdaptation System: **Common Rail System**Injector Nut Series: **G2 Series**Injector Nut Type: **Common Rail Electromagnetic Injector Nut**Injector Nut Dimensions: **Φ21.3×47.9×M19*0.75****1.4. 093164-4750 Injector Nut Specifications And Dimensions**Injector Nut Size: **4cm*3cm*3cm**Injector Nut Net Weight: **20g**Injector Nut Gross Weight: **25g**Injector Nut Quality: **China Made New**Injector Nut Package Size: **16cm*10cm*5cm**Injector Nut Type: **High Pressure Common Rail Injector Nut**Injector Nut MOQ: **1 Pieces****1.5. 093164-4750 Injector Nut Quality Control****(1) Injector Nut Testing**

All injector nuts are tested for electrical characteristics, accuracy, high temperature, low temperature, withstand voltage, leakage, durability, and various working conditions.

(2) Injector Nut Assembling

Mob/Whatsapp: +86 13410541523

Email : ruby@shumatt.com

© 2025 Shenzhen Shumatt Technology Co., Ltd

Tel: +8675523215133

Website : www.shumatt.com

For the quality control of the Injector nut production and installation process, our company strictly follows the standard product installation data and product installation steps to install.

(3) Injector Nut Inspection

The factory inspection of the injector nut is undergone full inspection, random inspection, and batch inspection three inspections. Different brands of test benches are used to test the same injector nut for more than three times for factory inspection, and the injector nut installation testing environment are progressed in dust-free workshop.

1.6. 093164-4750 Injector Nut Customized Service

(1) Injector Nut Customized Service Coverage: Meet the customized needs of OEM manufacturers for shell lettering, logo engraving, injector nut internal packaging, injector nut external packaging and labels customized, etc.

| | |
|---|--|
|  |  |
| White Neutral Packaging Box | Color Customization: Gray, Black, White |

(2) Injector Nut Customized Service Requirements:

The quantity of customized injector nuts shall not be less than **10 pieces**.




The quantity of customized injector nuts packages shall not be less than **1000 pieces**.

Customized products involve the need of specify logo, the OEM manufacturer needs to provide trademark authorization and the sample of logo image file.

⚠ Once the customized injector nuts is sold, it cannot be returned or exchanged if there are no quality problems.

1.7. 093164-4750 Injector Nut Packing List and Package Size

(1) Injector Nut Spare Parts List

| No. | 1 | 2 | 3 |
|-------------|---|---|---|
| Image |  |  |  |
| Name | Injector Nut Assy | Injector Nut Height | Injector Nut Outer Diameter Dimensions |
| Description | | Height 41.5mm | Outer diameter size 19.1mm |
| No. | 4 | 5 | 6 |

| | | | |
|-------------|---|---|---|
| Image |  |  | |
| Name | Injector Nut Diameter Dimensions | Injector Nut lining | / |
| Description | Inner diameter M19*0.75 | Prevent bumping damage to the tight cap | / |

⚠ Minors are prohibited from using the injector nut assembly, O-rings, injector nut housing covers, oil return covers, VCI anti-rust bags, and bubble bags to avoid personal injury.

⚠ The injector nut housing cover and oil return cover are recyclable accessories and can be recycled.

⚠ VCI anti-rust bags and bubble bags are non-degradable materials. Please dispose of them properly after use.

⚠ The injector nut and the installation parts guide tube should be treated with appropriate sealing oil during installation.

(2) Injector Nut Box Size



| No. | Name | Injector Nut Packing Size (cm) |
|-----|------------------|--------------------------------|
| 1 | Injector Nut Box | 16*5*10 |

1.8. 093164-4750 Injector Nut Testing Standard and Certificate

Shumatt can provide the factory quality inspection test report of each injector nut to ensure that each injector nut delivered meets the engine performance indicators.

| BOTEN | | 测试报告 | | 4.05.2019 10:42:09 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---|-------|------------|----|--------------------|--|------|------|------|----|-----------|----|-----|---|------|----|-----|---|------|----|------------|---|-----|-------|------------|---|----|------|----------|---|----|------|----------|---|----|-----|---------|---|
| 承接企业: _____ 电话: _____ 地址: _____ 传真: _____ 检测人: _____ 客户地址: _____ 检测单位: _____ 电话: _____ 客户姓名: _____ 传真: _____ 检测描述: _____ 检测名称: 检测器 型号-零件号: _____ 检测时间: _____ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 检测结果 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 检测标准: C091002-0511 <table border="1"> <thead> <tr> <th>检测项目</th> <th>检测结果</th> <th>标准范围</th> <th>合格</th> </tr> </thead> <tbody> <tr> <td>LSAR TEST</td> <td>32</td> <td>4-5</td> <td>✓</td> </tr> <tr> <td>Back</td> <td>32</td> <td>75%</td> <td>✓</td> </tr> <tr> <td>WPRM</td> <td>32</td> <td>147.5±10.5</td> <td>✗</td> </tr> <tr> <td>Max</td> <td>231.5</td> <td>218.5±14.4</td> <td>✓</td> </tr> <tr> <td>TL</td> <td>28.4</td> <td>25.4±8.5</td> <td>✓</td> </tr> <tr> <td>LL</td> <td>14.1</td> <td>12.1±4.8</td> <td>✓</td> </tr> <tr> <td>VE</td> <td>5.2</td> <td>4.5±1.6</td> <td>✓</td> </tr> </tbody> </table> | | | | | | 检测项目 | 检测结果 | 标准范围 | 合格 | LSAR TEST | 32 | 4-5 | ✓ | Back | 32 | 75% | ✓ | WPRM | 32 | 147.5±10.5 | ✗ | Max | 231.5 | 218.5±14.4 | ✓ | TL | 28.4 | 25.4±8.5 | ✓ | LL | 14.1 | 12.1±4.8 | ✓ | VE | 5.2 | 4.5±1.6 | ✓ |
| 检测项目 | 检测结果 | 标准范围 | 合格 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| LSAR TEST | 32 | 4-5 | ✓ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Back | 32 | 75% | ✓ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| WPRM | 32 | 147.5±10.5 | ✗ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Max | 231.5 | 218.5±14.4 | ✓ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| TL | 28.4 | 25.4±8.5 | ✓ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| LL | 14.1 | 12.1±4.8 | ✓ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| VE | 5.2 | 4.5±1.6 | ✓ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 检测人: _____ 检测时间: _____ <input type="checkbox"/> 维修前 <input type="checkbox"/> 维修后 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

1.9. 093164-4750 Injector Nut Warranty Instructions

(1) Product Warranty Conditions and Instructions

It is necessary to provide pictures, videos, or test reports detected by the injector nut inspection equipment when the injector nut is abnormal during use as evidence to feed back to the salesman.

Abnormal conditions are properly explained such as: 1.Smoke, 2. Engine shake, 3. Difficulty starting the engine, 4. Engine noise, 5. oil leakage etc.

(2) Injector Nut Warranty Coverage

Within 15 days after customer receives the 093164-4750 injector nut, if there is a performance failure and the product has no appearance damage, customer can choose to replace it or repair it;

If the 093164-4750 injector nut has performance problems during the warranty period (6-12 months), and it is confirmed that it is product's problems after testing, you can contact our salesmen to replace the same model or a reworked product with the same performance for free;

If the injector nut house has obvious scratches, it can only be repaired and it will be returned as it is if the product is confirmed to be fault-free.

▲ Tips: For products not covered by warranty, our company can provide paid maintenance services. For products after paid repaired, the same performance problem will have a free warranty period within 3 months from the date of repairing.

(3) Injector Nut Out of Warranty Coverage

- ① The warranty period has expired.
- ② Injector nut failure caused by high temperature, high pressure, humidity, rain and snow, saline-alkali land, earthquake, and used in abnormal environment.
- ③ Customer disassembles or repairs the Injector nut personally resulting in damage to the Injector Nut.
- ④ Injector nut damage caused by man-made reasons (throwing, strong magnetic field magnetization, set fire).
- ⑤ Injector nut failure or Injector nut damage caused by non-Injector nut design, technology, manufacturing, quality, and other issues.
- ⑥ Injector nut failure due to system pressure exceeding system approved pressure.
- ⑦ Injector nut failure caused by system voltage exceeding approved voltage.
- ⑧ Injector nut failure caused by impurities (water, lead, aluminum powder, iron powder, sulfide) in the system fuel exceeding the standard requirements.
- ⑨ Injector nut failure caused by not installing according to the tightening torque specified in the vehicle engine maintenance manual (the tightening torque is too large or too small).
- ⑩ Injector nut failure caused by not following the installation angle specified in the vehicle engine maintenance manual.
- 11 Injector nut failure caused by not following the cleaning requirements specified in the vehicle engine maintenance manual.
- 12 Injector nut failure caused by failure to replace consumable parts as specified in the vehicle engine maintenance manual.
- 13 Injector nut failure caused by not complying with the intake system fit clearance and exhaust system fit clearance requirements specified in the vehicle engine maintenance manual.
- 14 Failure to replace the consumable parts and the fitting clearance of the oil inlet system pipeline and the Injector nut connection in accordance with the fuel intake system specified in the vehicle engine maintenance manual.

1.10. 093164-4750 Injector Nut Manufacturer

Injector Nut Manufacturer: Shenzhen Shumatt Technology Co., Ltd

2. 093164-4750 Injector Nut Technical Support

2.1. 093164-4750 Injector Nut Use location

Mob/Whatsapp: +86 13410541523

Email : ruby@shumatt.com

© 2025 Shenzhen Shumatt Technology Co., Ltd

Tel: +8675523215133

Website : www.shumatt.com

| NO. | Name |
|-----|--------------|
| A | Injector Nut |



- ⚠ The replacement of the Injector nut must strictly follow the electrical system, the approved pressure of the low-pressure fuel intake system, the approved pressure of the high-pressure fuel circuit system, and fuel system replacement consumables requirements (including the low-pressure fuel circuit system filter and the high-pressure fuel circuit) specified in the vehicle engine maintenance manual.
- ⚠ Replacement of wearing parts of the fuel system, cleaning requirements for the connection between the fuel system and the Injector nut, the fitting clearance of the Injector nut connection, the installation angle and tightening torque of the Injector nut, the fitting clearance of the intake system, and the fitting clearance of the exhaust system to ensure the service life of the engine and the normal operation of the Injector nut.
- ⚠ When installing the Injector nut on the engine, it is necessary to clean the engine block, cylinder head and other parts connected to the Injector nut, and ensure that there is no dust, carbon deposits, water, rust spots, etc.
- ⚠ When installing the Injector nut on the engine, please carefully check the components related to the installation of the Injector nut, such as the Injector nut pressure plate, screw, Injector nut rod and other accessories are not deformed, and install it in strict accordance with the operation steps of the engine maintenance manual.
- ⚠ It is forbidden to operate the bare Injector nut for a long time in an environment with serious dust pollution and corrosion to iron products.

⚠ It is forbidden to operate the bare Injector nut for a long time in a strong magnetic field environment.

2.2. 093164-4750 Injector Nut Installation

(1) 093164-4750 Injector Nut Installation Precautions:

⚠ The replacement of the Injector nut must strictly follow the electrical system, the approved pressure of the low-pressure fuel intake system, the approved pressure of the high-pressure fuel circuit system, and fuel system replacement consumables requirements (including the low-pressure fuel circuit system filter and the high-pressure fuel circuit) specified in the vehicle engine maintenance manual.

⚠ Replacement of wearing parts of the fuel system, cleaning requirements for the connection between the fuel system and the injector nut, the fitting clearance of the injector nut connection, the installation angle and tightening torque of the injector nut, the fitting clearance of the intake system, and the fitting clearance of the exhaust system to ensure the service life of the engine and the normal operation of the injector nut.

⚠ When installing the injector nut on the engine, it is necessary to clean the engine block, cylinder head and other parts connected to the injector nut, and ensure that there is no dust, carbon deposits, water, rust spots, etc.

⚠ When installing the injector nut on the engine, please carefully check the components related to the installation of the injector nut, such as the injector nut pressure plate, screw, injector nut rod and other accessories are not deformed, and install it in strict accordance with the operation steps of the engine maintenance manual.

⚠ It is forbidden to operate the bare injector nut for a long time in an environment with serious dust pollution and corrosion to iron products.

⚠ It is forbidden to operate the bare injector nut for a long time in a strong magnetic field environment.

(2) 093164-4750 Injector Nut Installation Precautions:

When Injector Nut cap of the fuel injector nozzle, the torque wrench and tightening torque (50Nm) specified in the fuel injector maintenance manual must be installed.



The tightening torque of the Nut tightening cap must be installed according to the tightening torque specified in the injector maintenance manual.

2.3. 093164-4750 Injector Nut Not Working Normally

- (1) There is air in the oil circuit of the engine fuel system.
- (2) Vehicle oil pump's oil supply system is not normal.
- (3) Engine common rail system oil leakage or pressure limiting valve damage.
- (4) There is a short circuit, cutting out and poor contact in the wiring harness connected to the injector nut of the vehicle.
- (5) The long-term placement of the injector nut causes the anti-rust oil to solidify, and the internal components are stuck or the oil holes are blocked.

⚠ Before installing, carefully check whether other components in the common rail system except the injector nut are damaged to prevent the injector nut from not working properly after being replaced.

2.4. 093164-4750 Injector Nut Causes of Being Damaged

- (1) Didn't operate properly according to engine maintenance manual during disassembly or installation, resulting in damage to the injector nut.
- (2) The fuel oil used for the vehicle does not meet the standard cause damage to the injector nut, such as: the water content in the fuel oil exceeds the standard, iron powder, aluminum powder, sulfide impurities exceed the standard, etc.
- (3) The engine is not regularly maintained according to the engine maintenance manual (please refer to the vehicle maintenance manual for the maintenance mileage). For example, failure to replace the lubricating oil of the engine system for a long time will cause abnormal wear of the engine, excessive exhaust gas volume or a large amount of carbon deposits inside the engine. The filter is not replaced during maintenance or the replaced filter cannot reach the original filter standard. all above reasons can cause damage to the injector nut.

- (4) The abrasion of the injector nut produces iron powder and aluminum powder enter the injector nut and cause damage to the injector nut.
- (5) The deformation and abrasion of fuel tank result in iron powder or aluminum powder entering the injector nut and causing damage to the injector nut.
- (6) The injector nut is damaged due to replacement or adjustment of the relevant parts of the injector nut. For example, the valve clearance does not meet the standard after the engine is repaired, the replacement or modification of the wiring harness connected to the injector nut fails to meet the original standard.
- (7) The engine is overheated and overloaded for a long-time working result in damage to the injector nut.
- (8) The injector nut will be damaged naturally at the end of its working life.
- (9) The injector nut is magnetized (injector nut parts' magnetic exceeded) causing the injector nut to not work properly.

⚠ Before replacing the injector nut, please check the engine parts carefully according to the engine maintenance manual to avoid the injector nut being damaged again after replacement.

2.5. 093164-4750 Injector Nut Technical Support Obtaining Methods

- (1) Injector nut technical file, visit <http://shumatt.com> to get the technical file.
- (2) Injector nut technical videos

YouTube: https://www.youtube.com/channel/UCByvYBx7VjV_mAfxh_Hu-aw to get the technical videos, constantly follow can get more information.


Shumatt: Visit <http://shumatt.com> to get the technical videos.

- (3) Injector nut information query software

TruckBook Parts EPC APP, Android/Apple App Store download and install, visit <http://shumatt.com> to get the download and installation tutorial

- (4) Search the fuel Injector nut test data through TruckBook Parts EPC APP.

2.6. 093164-4750 Injector Nut measuring tool

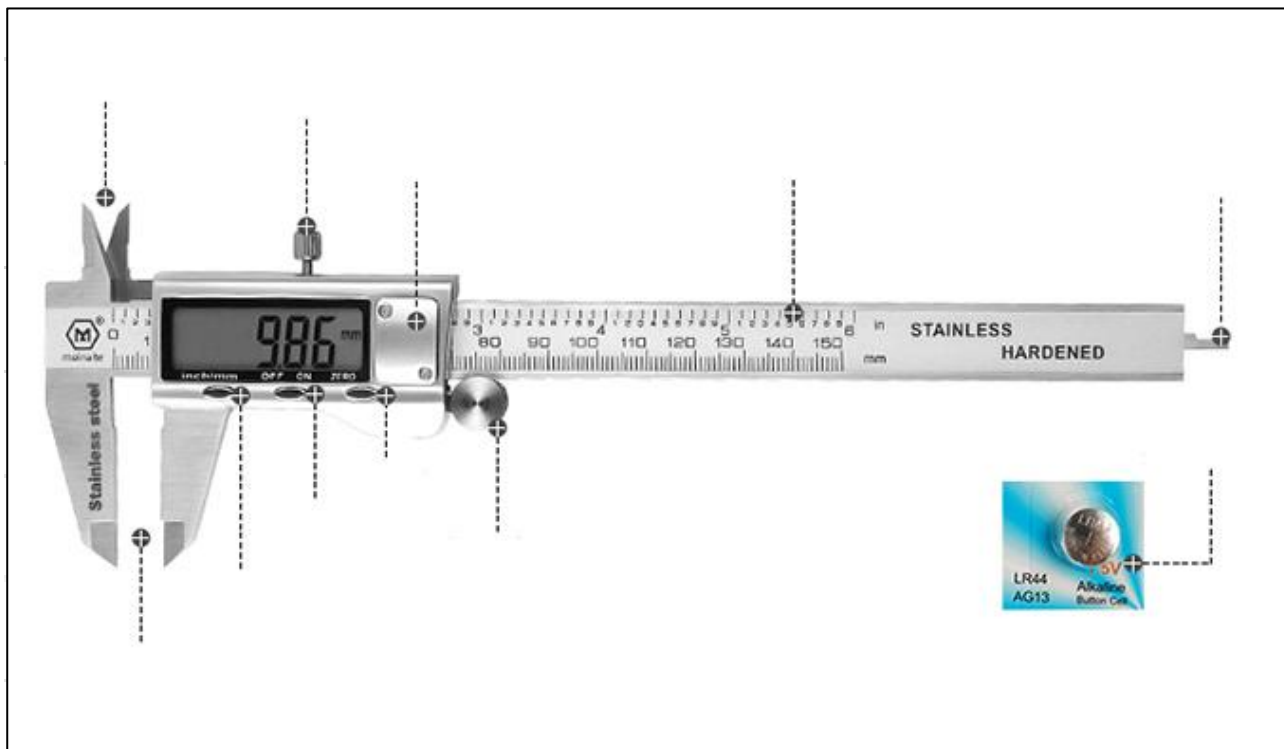

| | |
|----------------------------------|---------------------------------------|
| 1. Inner diameter measuring claw | 7. Inch/mm metric and inch conversion |
| 2. Limit screw | 8. OFF/ON switch key |
| 3. Battery installation place | 9. ZERO key |
| 4. Ruler body | 10. Push the roller |
| 5. Depth measurement | 11. Button battery |
| 6. Depth measurement | |

2.7. 093164-4750 Injector Nut measuring Measurement steps



| | |
|--|---|
| Pic 1 Caliper: CRT085 | Pic 2 Caliper: CRT085 |
| Step 1: Select the caliper: CRT085 (as shown in Pic 1) | Step 2: Turn on the caliper (OFF/ON) first, then reset the display (ZERO) to zero (Pic 2) |
| | ▲ The caliper must be adjusted to zero before measuring. |



Pic 2

Step 3: Measure the height of the 093164-4750 nozzle cap and place it in the position shown in the picture (Pic 3)



Pic 3

Step 4: Measure the outer diameter of the 093164-4750 nozzle cap and place it in the position shown in the picture (Pic 5)

▲The value must be 0. The value measured after the caliper is clamped on the oil nozzle cap shall prevail. It cannot be placed at an angle.

▲The value must be 0, and the value measured after the oil nozzle cap is clamped shall prevail. It cannot be placed tilted.



Pic. 4

Step 5: Measure the inner diameter of the 093164-4750 nozzle cap and place it in the position shown in the picture (Pic 5)

▲The value must be 0, and the value measured after the oil nozzle cap is clamped shall prevail. It cannot be placed tilted.



Pic 5

Step 6: Measure the hexagonal side-to-side diameter of the 093164-4750 grease fitting cap and place it in the position shown in the picture (Pic 6)

▲The value must be 0, and the value measured after the oil nozzle cap is clamped shall prevail. It cannot be placed tilted.

3. 093164-4750 Injector Nut Purchase and Delivery

3.1. 093164-4750 Injector Nut Purchase Payment Term

Payment Terms: T/T, PayPal, Alipay, WeChat

⚠ Please contact our salesmen for specific payment information.

3.2. 093164-4750 Injector Nut Main Sales Markets

Mob/Whatsapp: +86 13410541523

Email : ruby@shumatt.com

© 2025 Shenzhen Shumatt Technology Co., Ltd

Tel: +8675523215133

Website : www.shumatt.com

Injector Nut Main Sales Markets: Asia, Europe, North America, South America, Africa etc.

3.3. 093164-4750 Injector Nut Declaration Requirements

Shumatt can assist customers to provide the following documents for import customs clearance: contract, invoice, packing list, bill of lading, insurance policy, certificate of origin, etc.

3.4. 093164-4750 Injector Nut Shipping Ways

Destination in China Areas: SF Express, Debon Express, the corresponding logistics company can be provided according to customer requirements in special cases.

Destinations Out of China's Areas: DHL, UPS, FedEx, TNT air, ocean or other shipping methods required by customers.

3.5. 093164-4750 Injector Nut Lead Time

Lead Time: Send out within 3 – 7 working days after receiving payment (Except for special products and special cases) .

3.6. 093164-4750 Injector Nut Logistics Time for Destination Out of China's Areas

DHL Logistics Time:

| Country or Region of Departure | Hong Kong, China | Other Countries or Regions of Asia | Australia and New Zealand | Europe | America | Other Countries |
|--------------------------------|------------------|------------------------------------|---------------------------|--------|-----------|-----------------|
| China's Mainland | 7 Days | 7 Days | 8 Days | 8 Days | 8-12 Days | 7-10 Days |

UPS Logistics Time: Country or Region of Departure: China's Mainland

| Country of Destination | Estimated Arrival Time | Country of Destination | Estimated Arrival Time | Country of Destination | Estimated Arrival Time |
|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|
| Japan | 3 Days | UK | 5-7Days | Egypt | 5-7 Days |
| Turkey | 5-7 Days | Singapore | 3 Days | Switzerland | 5-7 Days |
| Bahrain | 5-7 Days | Latvia | 7-10 Days | New Zealand | 7-10 Days |
| Sri Lanka | 5-7 Days | Thailand | 3 Days | Austria | 5-7 Days |
| Romania | 5-7 Days | Vietnam | 3-5 Days | Estonia | 5-7 Days |
| Malaysia | 3-5 Days | Israel | 5-7 Days | Mexico | 7-10 Days |
| France | 5-7 Days | America | 5-7 Days | United Arab Emirates | 5-7 Days |
| Italy | 5-7 Days | Netherlands | 5-7 Days | Bengal | 7-10 Days |
| Lebanon | 5-7 Days | Philippine | 3-5 Days | Greece | 7-10 Days |
| South Korea | 3 Days | Spain | 5-7 Days | Myanmar | 5-7 Days |
| Canada | 5-7 Days | Germany | 5-7 Days | Saudi Arabia | 7-10 Days |
| Portugal | 5-7 Days | Australia | 5-7 Days | South Africa | 7-10 Days |
| Denmark | 5-7 Days | Belgium | 5-7 Days | Ukraine | 7-10 Days |
| India | 7-10 Days | Qatar | 7-10 Days | Poland | 5-7 Days |
| Indonesia | 3-5 Days | Morocco | 7-10 Days | Pakistan | 7-10 Days |
| Kuwait | 7-10 Days | / | / | / | / |

Mob/Whatsapp: +86 13410541523

Email : ruby@shumatt.com

© 2025 Shenzhen Shumatt Technology Co., Ltd

Tel: +8675523215133

Website : www.shumatt.com

⚠ The logistics time is for reference only and is subject to the actual arrival.

3.7. 093164-4750 Injector Nut Packing

Domestic Express Packaging: Usually wrapped in waterproof scotch tape, such as picture No. 1.

International Express Packaging: Wrapped with waterproof yellow tape After wrapping the black protective film, such as picture No. 2.

Pallet Shipping: Use fumigation free and recycling trays that meet export requirements, and use white wrapping protective film to wrap and bind with cable ties for the outside, such as picture No. 3, also, the products can be packaged according to customers' requirements.

⚠ The packing tray is made of plastic and can be recycled.

⚠ Transparent tape, yellow tape, black wrapping protective film, white wrapping protective film are non-degradable materials, please dispose of them properly.


⚠ Minors are prohibited from using transparent tape, yellow tape, black wrapping protective film, and white wrapping protective film to avoid personal injury.



Pic No. 1

Domestic express packaging:

Wrapped with Transparent tape

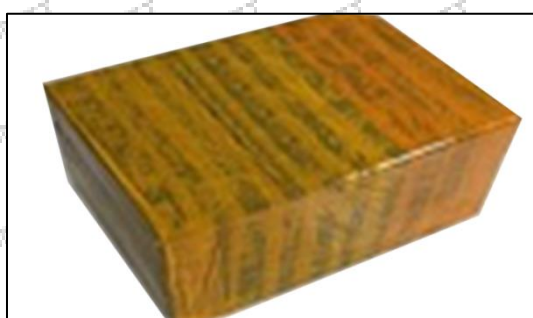

Pic No. 2

International express packaging:

Wrapped with yellow tape after wrapping black protective film



Pallet shipment: Use pallets that meet export requirements and wrap with white plastic wrap and tie.

4. 093164-4750 Injector Nut Storage Standard

(1) Choose a Suitable Storage Place

The warehouse and cargo yard where the injector nut is stored should be kept clean and dry, and away from the factory buildings that generate harmful gases and dust; do not mix with acids, alkali, salt, and other substances; the storage place should have a good drainage system; the cargo yard should be flattened with gravel or furnace ash etc. to enhance the water permeability of the surface layer to keep the reservoir area dry.

(2) Strict Requirements of Warehousing

Strict inspections should be carried out when the injector nuts are put into storage, the surface cleaning work should be done well to remove water traces, oil stains, ashes, and other dirt, remove the rust and do anti-rust treatment in time. Packaged injector nuts must be protected from damage.

(3) Keep The Warehouse Dry And Preventing Moisture

The relative humidity is usually below 70% for the injector nuts placed in the room, and the corrosion of the injector nuts is significantly reduced.

injector nuts must be stored in the warehouse, and they are forbidden to store in the same warehouse with commodities with high water content.

(4) Stack Properly

After the injector nut is exposed to rain, the corrosion rate will increase significantly. The purpose of sealing is to isolate the injector nut from rainwater and humid air, so the warehouse window should be checked in time to avoid rainwater entering the warehouse.

If the injector nut package is damaged, it should be repaired or replaced; when the package is damp, the packaging material should be dried; if the original anti-corrosion and oil applied at the factory is found to be damaged or dried up, it should be cleaned and re-applied oil in time.



It is forbidden to leave the injector nut exposed in the air for a long time.



It is forbidden to store acids, alkalis, salts, and other substances together with the injector nut.



The unpacked injector nut must be rust-proof during secondary storage.

5. Company Information



5.1. Company Introduction

Chinese Name: 深圳市舒马特科技有限公司

English Name: Shenzhen Shumatt Technology Co., Ltd


 **Mob Phone/WeChat:** +86-13410541523


 **HK Telephone:** +852-67653519

 **Telephone:** +86-755-23215133

 **Email:** ruby@shumatt.com

 **Website:** www.shumatt.com

 **Shenzhen Office:** 11-12, Floor 14, Building 13, Qinchengda Building, Exit A, Honglang North Subway Station, Bao'an District, Shenzhen, China's Mainland

 **Shenzhen Office:** Exit C, Qiao Touxu Metro Station, NO. 66 Chongqing Road, Fuhai Avenue, Bao'an District, Shenzhen, China Mainland

 **Hong Kong Office:** Jianfa Street Industrial Zone, Tuen Mun, New Territories, Hong Kong, China

Mob/Whatsapp: +86 13410541523

Email : ruby@shumatt.com

Tel: +8675523215133

Website : www.shumatt.com

© 2025 Shenzhen Shumatt Technology Co., Ltd

📍 **After-sales Service Address:** Please contact our salesmen to obtain and provide the corresponding product maintenance reasons (Reference: [1.9. 093164-4750 Injector Nut Warranty Instructions](#))

5.2. Salesmen's Contact Information

| No. | Name | WeChat/WhatsApp | Email |
|--|------------------------------|------------------|--|
| 1 | Ruby | +86-13410541523 | ruby@shumatt.com |
| 2 | Ivy | +86-18025299821 | sales@shumatt.com |
| 3 | Rebecca | +86-18025349821 | sales01@shumatt.com |
| 4 | Janny | +86-18028749821 | sales02@shumatt.com |
| 5 | Sam | +86-13316859821 | Sales8@shumatt.com |
| 6 | Natalie | +86- 18938945856 | sales15@shumatt.com |
| 7 | Ada | +86-1342286353 | sales5@shumatt.com |
| 8 | Hison Li | +86-18318811871 | web@shumatt.com |
| 9 | Mecca | +86-18938948618 | sales11@shumatt.com |
| 10 | Eric | +86 18319033618 | sales3@shumatt.com |
| 11 | Wayne (Joaquín en español) | +86-13316959821 | wayne@shumatt.com |
| 12 | Sylvia | +86 18312499884 | sales6@shumatt.com |
| Visit http://shumatt.com to obtain the latest information of salesmen | | | |
| PS: Shumatt's salesmen's emails are all end with @shumatt.com | | | |

6. Copyright Statement

The copyright of any contents (including but not limited to parameters, data, text, charts, images, sounds, or videos, etc.) provided in "*093164-4750 Injector Nut Technical File*" belong to Shenzhen Shumatt Technology Co., Ltd. Without the prior written permission of Shenzhen Shumatt Technology Co., Ltd., you are not allowed to modify any contents in "*093164-4750 Injector Nut Technical File*" in any way. At the same time, any conditions to spread, repost, display the contents of "*093164-4750 Injector Nut Technical File*" should indicate that the cited article is from Shenzhen Shumatt Technology Co., Ltd., Any actions failure to follow above conditions to use "*093164-4750 Injector Nut Technical File*" will violate the "Copyright Law of the People's Republic of China" and other laws and regulations and the provisions of relevant international conventions.