31MPP13-6 Differential Pressure Sensor Technical File

SKU: Y1L300031MPP136



31MPP13-6 Differential Pressure Sensor Technical File

Content

1. 31MPP13-6 Differential Pressure Sensor Introduction 2
1.1. 31MPP13-6 Differential Pressure Sensor Basic Information 2
1.2. 31MPP13-6 Differential Pressure Sensor Common Part Number 2
1.3. 31MPP13-6 Differential Pressure Sensor Application Information 2
1.4. 31MPP13-6 Differential Pressure Sensor Parameter 2
1.5. 31MPP13-6 Differential Pressure Sensor Quality Control 2
1.6. 31MPP13-6 Differential Pressure Sensor Customized Service 3
1.7. 31MPP13-6 Differential Pressure Sensor Packing List and Package Size 3
1.8. 31MPP13-6 Differential Pressure Sensor Warranty Instructions 3
1.9. 31MPP13-6 Differential Pressure Sensor Manufacturer 4
2. 31MPP13-6 Differential Pressure Sensor Technical Support 4
2.1. 31MPP13-6 Differential Pressure Sensor Cleaning 4
2.2. 31MPP13-6 Differential Pressure Sensor Causes of Being Damaged 5
2.3. 31MPP13-6 Differential Pressure Sensor Technical Support Obtaining Methods 5
3. 31MPP13-6 Differential Pressure Sensor Purchase and Delivery 6
3.1. 31MPP13-6 Differential Pressure Sensor Purchase Payment Term 6
3.2. 31MPP13-6 Differential Pressure Sensor Main Sales Markets 6
3.3. 31MPP13-6 Differential Pressure Sensor Declaration Requirements 6
3.4. 31MPP13-6 Differential Pressure Sensor Shipping Ways 6
3.5. 31MPP13-6 Differential Pressure Sensor Lead Time 6
3.6. 31MPP13-6 Differential Pressure Sensor Logistics Time for Destination Out of China's Areas 6
3.7. 31MPP13-6 Differential Pressure Sensor Packing 7
4. 31MPP13-6 Differential Pressure Sensor Storage Standard 7
5. Company Information 8
5.1. Company Introduction 9
5.2. Salesmen's Contact Information 10
6. Copyright Statement 10

Mob/Whatsapp: +86 13410541523
Tel: +8675523215133
Email : ruby@shumatt.com
Website : www.shumatt.com
© 2026 Shenzhen Shumatt Technology Co., Ltd

31MPP13-6 Differential Pressure Sensor Technical File

1. 31MPP13-6 Differential Pressure Sensor Introduction

1.1. 31MPP13-6 Differential Pressure Sensor Basic Information

Title	31MPP13-6 Differential Pressure Sensor	Quality
SKU	Y1L300031MPP136	Original New

1.2. 31MPP13-6 Differential Pressure Sensor Common Part Number

Differential Pressure Sensor Part Number
31MPP13-6

1.3. 31MPP13-6 Differential Pressure Sensor Application Information

(1) Differential Pressure Sensor Application Information

Part Number	OEM
31MPP13-6	A133611070

(2) Differential Pressure Sensor Common Writing

31MPP13-6

1.4. 31MPP13-6 Differential Pressure Sensor Parameter

Differential Pressure Sensor Size: /
Differential Pressure Sensor Net Weight: /
Differential Pressure Sensor Package Size : /
Differential Pressure Sensor Gross Weight: /
Differential Pressure Sensor Quality: Original New
Differential Pressure Sensor MOQ: 1 Pieces

1.5. 31MPP13-6 Differential Pressure Sensor Quality Control

(1) Differential Pressure Sensor Testing

All differential pressure sensor parts are tested for electrical characteristics, accuracy, high temperature, low temperature, pressure resistance, leakage, durability, and various working conditions.

(2) Differential Pressure Sensor Inspection

The differential pressure sensor factory inspection is tested three times: full inspection, random inspection, and batch inspection. The differential pressure sensor factory inspection will use different brands of test benches to test the same differential pressure sensor for a total of no less than three times. The differential pressure sensor installation and testing environment is completed in a dust-free workshop.

(3) Differential Pressure Sensor Assembling

During the assembly of the differential pressure sensor pin and housing, our company strictly adheres to the standard technical specifications for the clearance between the differential pressure sensor pin and

Mob/Whatsapp: +86 13410541523
Tel: +8675523215133
Email : ruby@shumatt.com
Website : www.shumatt.com
© 2026 Shenzhen Shumatt Technology Co., Ltd

housing to ensure that each differential pressure sensor meets both factory and usage standards.

1.6. 31MPP13-6 Differential Pressure Sensor Customized Service

(1) Differential Pressure Sensor Customized Service Coverage:

Meet the customized needs of OEM manufacturers for differential pressure sensor housings with engraving (logo, model, date, serial number), differential pressure sensors without engraving, differential pressure sensor barrels, and differential pressure sensor packaging boxes.

(2) Differential Pressure Sensor Customized Service Requirements:

Customized differential pressure sensor pins, with or without engraving, shall be sold in no less than 100 pieces.

The sales of customized differential pressure sensor products shall not be less than 2000-3000 pieces.

The packaging of customized differential pressure sensors shall not be less than 1000 pieces.

Customized products involve the need of specify logo, the OEM manufacturer needs to provide trademark authorization and the sample of logo image file.

⚠ Once the customized differential pressure sensor is sold, it cannot be returned or exchanged if there are no quality problems.

1.7. 31MPP13-6 Differential Pressure Sensor Packing List and Package Size

(1) Differential Pressure Sensor Spare Parts List

No.	1	2	3
Image			/
Name	Differential Pressure Sensor	Differential Pressure Sensor Packaging Box	/
Description	Differential pressure sensor part number: 31MPP13-6	Placement of differential pressure sensor and differential pressure sensor accessories	/

⚠ Minors are prohibited from using the differential pressure sensor assembly, and bubble bag to avoid personal injury.

⚠ The packaging box is made of non-degradable material. Please dispose of i properly after use.

1.8. 31MPP13-6 Differential Pressure Sensor Warranty Instructions

(1) Product Warranty Conditions and Instructions

It is necessary to provide pictures, videos, or test reports detected by the differential pressure sensor inspection equipment when the differential pressure sensor is abnormal during use as evidence to feed back to the salesman.

Mob/Whatsapp: +86 13410541523
Tel: +8675523215133
Email : ruby@shumatt.com
Website : www.shumatt.com
© 2026 Shenzhen Shumatt Technology Co., Ltd

Abnormal conditions are properly explained such as：1.Smoke, 2. Engine shake, 3. Difficulty starting the engine, 4. Engine noise, 5. Fuel leakage etc.

(2) Differential Pressure Sensor Warranty Coverage

Within 15 days after customer receives the 31MPP13-6 differential pressure sensor, if there is a performance failure and the product has no appearance damage, customer can choose to replace it or repair it;

If the 31MPP13-6 differential pressure sensor has performance problems during the warranty period (3 months), and it is confirmed that it is product's problems after testing, you can contact our salesmen to replace the same model or a reworked product with the same performance for free;

If the product is confirmed to be without fault, it will be returned as is.

(3) Differential Pressure Sensor Out of Warranty Coverage

① The warranty period has expired and is not covered by the warranty.

② Differential pressure sensor failure caused by high temperature, high pressure, humidity, rain and snow, saline-alkali land, earthquake, and abnormal environment.

③ Differential pressure sensor damage caused by human factors (throwing, strong magnetic field magnetization, arson).

④ Differential pressure sensor damage damage caused by non-differential pressure sensor damage design, technology, manufacturing, quality, and other issues.

⑤ Differential pressure sensor failure caused by system pressure exceeding the approved system pressure.

⑥ Impurities (water, lead, aluminum powder, iron powder, sulfide) in the system fuel exceed the standard requirements and cause differential pressure sensor failure.

⑦ Differential pressure sensor failure caused by not installing according to the tightening torque specified in the vehicle engine maintenance manual (tightening torque is too large or too small).

⑧ Differential pressure sensor failure caused by failure to follow the installation angle specified in the vehicle engine maintenance manual.

⑨ Differential pressure sensor failure caused by failure to comply with the cleaning requirements specified in the vehicle engine maintenance manual.

⑩ Differential pressure sensor failure caused by failure to replace wearing parts in accordance with the requirements specified in the vehicle engine maintenance manual.

1.9. 31MPP13-6 Differential Pressure Sensor Manufacturer

Differential Pressure Sensor Manufacturer: Shenzhen Shumatt Technology Co., Ltd

2. 31MPP13-6 Differential Pressure Sensor Technical Support

2.1. 31MPP13-6 Differential Pressure Sensor Cleaning

(1) Before installation, the differential pressure sensor should be cleaned in an ultrasonic cleaner for 3-5 minutes to remove stains, dust, powder, rust-preventive oil oxides, paraffin bases, naphthenic groups, intermediate groups, salts, lead naphthenate, zinc naphthenate, sodium petroleum sulfonate, barium petroleum sulfonate, calcium petroleum sulfonate, tallow diamine trioleate, and rosin amine from its surface.

(2) Use compressed air to remove the cleaning fluid adhering to the surface of the differential pressure

© 2026 Shenzhen Shumatt Technology Co., Ltd

sensor after cleaning, ensuring it meets the usage standards.

2.2. Causes of 31MPP13-6 Differential Pressure Sensor Being Damaged

(1) Differential pressure sensor malfunction caused by impurities in the fuel (water, lead, aluminum powder, iron powder, sulfides) exceeding standard requirements.

(2) Differential pressure sensors experience normal wear due to prolonged operation at high temperatures.

(3) Wear on the differential pressure sensor needle caused blockage of the oil orifice, resulting in insufficient fuel injection and malfunction of the fuel pump.

⚠ Wear and tear on the differential pressure sensor nozzle can cause the fuel pump to pump more fuel, resulting in black smoke from the vehicle and, in severe cases, malfunction of the fuel pump.

⚠ If the differential pressure sensor needle cannot move smoothly and becomes stuck, it may cause serious damage to the differential pressure sensor.

⚠ The differential pressure sensor spring rusted and broke, causing the vehicle to emit black smoke.

⚠ Wear on the differential pressure sensor spring adjusting shim reduces the sensor's opening pressure, causing the oil pump to pump more fuel, resulting in black smoke from the vehicle and, in severe cases, malfunctioning of the oil pump.

⚠ Wear on the differential pressure sensor needle valve lift adjustment shim causes the needle valve stroke to increase, leading to increased oil pump flow and resulting in black smoke from the vehicle. In severe cases, this can cause the oil pump to malfunction.

⚠ Wear on the differential pressure sensor needle valve lift adjustment shim causes the needle valve stroke to increase, leading to increased oil pump flow and resulting in black smoke from the vehicle. In severe cases, this can cause the oil pump to malfunction.

2.3. 31MPP13-6 Differential Pressure Sensor Technical Support Obtaining Methods

(1) Differential Pressure Sensor Technical File, visit http://shumatt.com to get the technical file.

(2) Differential Pressure Sensor Technical Videos

Facebook： Follow https://www.facebook.com/hison.lito get technical support videos, and stay tuned for more information.

YouTube： https://www.youtube.com/channel/UCByvYBx7VjV_mAfxh_Hu-aw to get the technical videos，constantly follow can get more information.

Shumatt: Visit http://shumatt.com to get the technical videos.

(3) Differential Pressure Sensor Information Query Software

TruckBook Parts EPC APP，Android/Apple App Store download and install，visit http://shumatt.com to get the download and installation tutorial

(4) Search the Differential Pressure Sensor Test Data through TruckBook Parts EPC APP.

Mob/Whatsapp: +86 13410541523
Tel: +8675523215133
Email : ruby@shumatt.com
Website : www.shumatt.com
© 2026 Shenzhen Shumatt Technology Co., Ltd

3. 31MPP13-6 Differential Pressure Sensor Purchase and Delivery

3.1. 31MPP13-6 Differential Pressure Sensor Purchase Payment Term

Payment Terms: T/T, PayPal, Alipay, WeChat

⚠ Please contact our salesmen for specific payment information.

3.2. 31MPP13-6 Differential Pressure Sensor Main Sales Markets

Differential Pressure Sensor Main Sales Markets: Asia, Europe, North America, South America, Africa etc.

3.3. 31MPP13-6 Differential Pressure Sensor Declaration Requirements

Shumatt can assist customers to provide the following documents for import customs clearance: contract, invoice, packing list, bill of lading, insurance policy, certificate of origin, etc.

3.4. 31MPP13-6 Differential Pressure Sensor Shipping Ways

Destination in China Areas: SF Express, Debon Express, the corresponding logistics company can be provided according to customer requirements in special cases.

Destinations Out of China's Areas: DHL, UPS, FedEx, TNT air, ocean or other shipping methods required by customers

3.5. 31MPP13-6 Differential Pressure Sensor Lead Time

Lead Time: Send out within 3 – 7 working days after receiving payment（Except for special products and special cases）.

3.6. 31MPP13-6 Differential Pressure Sensor Logistics Time for Destination Out of China's Areas

DHL Logistics Time:

Country or Region of Departure	Hong Kong, China	Other Countries or Regions of Asia	Australia and New Zealand	Europe	America	Other Countries
China's Mainland	7 Days	7 Days	8 Days	8 Days	8-12 Days	7-10 Days

UPS Logistics Time: Country or Region of Departure: China's Mainland

Country of Destination	Estimated Arrival Time	Country of Destination	Estimated Arrival Time	Country of Destination	Estimated Arrival Time
Japan	3 Days	UK	5-7Days	Egypt	5-7 Days
Turkey	5-7 Days	Singapore	3 Days	Switzerland	5-7 Days
Bahrain	5-7 Days	Latvia	7-10 Days	New Zealand	7-10 Days
Sri Lanka	5-7 Days	Thailand	3 Days	Austria	5-7 Days
Romania	5-7 Days	Vietnam	3-5 Days	Estonia	5-7 Days
Malaysia	3-5 Days	Israel	5-7 Days	Mexico	7-10 Days
France	5-7 Days	America	5-7 Days	United Arab Emirates	5-7 Days
Italy	5-7 Days	Netherlands	5-7 Days	Bengal	7-10 Days
Lebanon	5-7 Days	Philippine	3-5 Days	Greece	7-10 Days

Mob/Whatsapp: +86 13410541523
Tel: +8675523215133
Email : ruby@shumatt.com
Website : www.shumatt.com
© 2026 Shenzhen Shumatt Technology Co., Ltd

South Korea	3 Days	Spain	5-7 Days	Myanmar	5-7 Days
Canada	5-7 Days	Germany	5-7 Days	Saudi Arabia	7-10 Days
Portugal	5-7 Days	Australia	5-7 Days	South Africa	7-10 Days
Denmark	5-7 Days	Belgium	5-7 Days	Ukraine	7-10 Days
India	7-10 Days	Qatar	7-10 Days	Poland	5-7 Days
Indonesia	3-5 Days	Morocco	7-10 Days	Pakistan	7-10 Days
Kuwait	7-10 Days	/	/	/	/

⚠ The logistics time is for reference only and is subject to the actual arrival.

3.7. 31MPP13-6 Differential Pressure Sensor Packing

Domestic Express Packaging: Usually wrapped in waterproof scotch tape, such as picture No. 1.

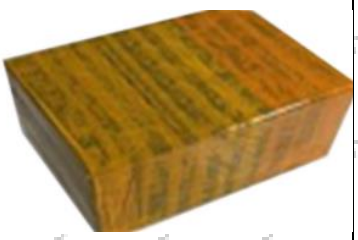
International Express Packaging: Wrapped with waterproof yellow tape After wrapping the black protective film, such as picture No. 2.

Pallet Shipping: Use fumigation free and recycling trays that meet export requirements, and use white wrapping protective film to wrap and bind with cable ties for the outside, such as picture No. 3,
also, the products can be packaged according to customers' requirements.

⚠ The packing tray is made of plastic and can be recycled.

⚠ Transparent tape, yellow tape, black wrapping protective film, white wrapping protective film are non-degradable materials, please dispose of them properly.

⚠ Minors are prohibited from using transparent tape, yellow tape, black wrapping protective film, and white wrapping protective film to avoid personal injury.

No.	1	2	3
Image			
Name	Domestic Express Packaging	International Express Packaging	Pallet Shipping
Description	Wrapped by transparent tape	Wrapped with yellow tape after wrapping black protective film	Use pallet that meet export requirements, and use white wrapping protective film to wrap and bind with cable ties

4. 31MPP13-6 Differential Pressure Sensor Storage Standard

© 2026 Shenzhen Shumatt Technology Co., Ltd

(1) Choose a Suitable Storage Place

The warehouse and cargo yard where the differential pressure sensor is stored should be kept clean and dry, and away from the factory buildings that generate harmful gases and dust; do not mix with acids, alkali, salt, and other substances; the storage place should have a good drainage system; the cargo yard should be flattened with gravel or furnace ash etc. to enhance the water permeability of the surface layer to keep the reservoir area dry.

(2) Strict Requirements of Warehousing

Strict inspections should be carried out when the differential pressure sensors are put into storage, the surface cleaning work should be done well to remove water traces, fuel stains, ashes, and other dirt, remove the rust and do anti-rust treatment in time. Packaged differential pressure sensors must be protected from damage.

(3) Keep The Warehouse Dry And Preventing Moisture

The relative humidity is usually below 70% for the differential pressure sensors placed in the room, and the corrosion of the differential pressure sensors is significantly reduced.

Differential pressure sensors must be stored in the warehouse, and they are forbidden to store in the same warehouse with commodities with high water content.

(4) Stack Properly

After the differential pressure sensor is exposed to rain, the corrosion rate will increase significantly. The purpose of sealing is to isolate the differential pressure sensor from rainwater and humid air, so the warehouse window should be checked in time to avoid rainwater entering the warehouse.

If the differential pressure sensor package is damaged, it should be repaired or replaced; when the package is damp, the packaging material should be dried; if the original anti-corrosion and fuel applied at the factory is found to be damaged or dried up, it should be cleaned and re-applied fuel in time.

⚠ It is forbidden to leave the differential pressure sensor exposed in the air for a long time.

⚠ It is forbidden to store acids, alkalis, salts, and other substances together with the differential pressure sensor.

⚠ The unpacked differential pressure sensor must be rust-proof during secondary storage.

⚠ After being unpacked, the differential pressure sensor must be treated with rust prevention measures when it is stored again.

5. Company Information

Mob/Whatsapp: +86 13410541523
Tel: +8675523215133
Email : ruby@shumatt.com
Website : www.shumatt.com
© 2026 Shenzhen Shumatt Technology Co., Ltd



5.1. Company Introduction

Chinese Name： 深圳市舒马特科技有限公司

English Name： Shenzhen Shumatt Technology Co., Ltd

Mob Phone/WeChat： +86-13410541523

HK Telephone： +852-67653519

Telephone： +86-755-23215133

Email： ruby@shumatt.com

Website： www.shumatt.com

Shenzhen Office： 11-12, Floor 14, Building 13, Qinchengda Building, Exit A, Honglang North Subway Station, Bao'an District, Shenzhen, China's Mainland

Shenzhen Office： Exit C, Qiao Touxi Metro Station, N0. 66 Chongqing Road, Fuhai Avenue, Bao'an District, Shenzhen, China Mainland

Hong Kong Office： Jianfa Street Industrial Zone, Tuen Mun, New Territories, Hong Kong, China

After-sales Service Address： Please contact our salesmen to obtain and provide the corresponding product maintenance reasons（Reference: **1.8. 31MPP13-6 Differential Pressure Sensor Warranty Instructions**）

© 2026 Shenzhen Shumatt Technology Co., Ltd

5.2. Salesmen's Contact Information

No.	Name	WeChat/WhatsApp	Email
1	Ruby	+86-13410541523	ruby@shumatt.com
2	Ivy	+86-18025299821	sales@shumatt.com
3	Rebecca	+86-18025349821	sales01@shumatt.com
4	Janny	+86-18028749821	sales02@shumatt.com
5	Sam	+86-13316859821	Sales8@shumatt.com
6	Natalie	+86- 18938945856	sales15@shumatt.com
7	Ada	+86-1342286353	sales5@shumatt.com
8	Hison Li	+86-18318811871	web@shumatt.com
9	Mecca	+86-18938948618	sales11@shumatt.com
10	Eric	+86 18319033618	sales3@shumatt.com
11	Wayne (Joaquín en español)	+86-13316959821	wayne@shumatt.com
12	Sylvia	+86 18312499884	sales6@shumatt.com
Visit http://shumatt.com to obtain the latest information of salesmen			
PS: Shumatt's sales men's emails are all end with **@shumatt.com**			

6. Copyright Statement

The copyright of any contents (including but not limited to parameters, data, text, charts, images, sounds, or videos, etc.) provided in *"31MPP13-6 Differential Pressure Sensor Technical File"* belong to Shenzhen Shumatt Technology Co., Ltd. Without the prior written permission of Shenzhen Shumatt Technology Co., Ltd., you are not allowed to modify any contents in *"31MPP13-6 Differential Pressure Sensor Technical File"* in any way. At the same time, any conditions to spread, repost, display the contents of *"31MPP13-6 Differential Pressure Sensor Technical File"* should indicate that the cited article is from Shenzhen Shumatt Technology Co., Ltd., Any actions failure to follow above conditions to use *"31MPP13-6 Differential Pressure Sensor Technical File"* will violate the *"Copyright Law of the People's Republic of China"* and other laws and regulations and the provisions of relevant international conventions.

© 2026 Shenzhen Shumatt Technology Co., Ltd