



SPURATE

0445120044 Injector CRIN1-14/16 Technical File

States	st ^{er}
1.0445120044 Injector's Introduction	2
1.1. 0445120044 Injector's Basic Information	2
1.1. 0445120044 Injector's Basic Information 1.2. 0445120044 Injector's Common Part Number	2
1.3.0445120044 Injector's Matching Information	2
1.4.0445120044 Injector's Parameter	
1.5.0445120044 Injector's Specifications and Dimensions	
1.6. 0445120044 Injector's Quality Control	5
1.6. 0445120044 Injector's Quality Control	6
1.8.0445120044 Injector's Packing List and Package Size	6
1.9.0445120044 Injector's Testing Standard and Certificate	
1 10 0445120044 Injector's Warranty Instructions	8
1.11.0445120044 Injector's Manufacturer	9
2.0445120044 Injector Technical Support	9
2.1.0445120044 Injector's Part Number Location	9
2.2.0445120044 Injector's Application Scenarios	9
2.3.0445120044 Injector's Installation	. 10
2.4. 0445120044 Injector 's Reasons for Not Working Normally	. 11
2.4. 0445120044 Injector 's Reasons for Not Working Normally 2.5. 0445120044 Injector 's Causes of Damage	. 11
2.6.0445120044 Injector's Technical Support Obtaining Methods	. 11
3.0445120044 Injector's Purchase and Delivery	. 12
3.1.0445120044 Injector's Purchase Payment Term	. 12
3.2.0445120044 Injector's Main Sales Markets	. 12
3.1.0445120044 Injector's Purchase Payment Term 3.2.0445120044 Injector's Main Sales Markets 3.3.0445120044 Injector's Declaration Requirements	. 12
3.4.0445120044 Injector's Shipping Ways	. 12
3.5.0445120044 Injector's Lead time	. 12
3.6.0445120044 Injector's Logistics Time for Destination Out of China's Areas	
3.7.0445120044 Injector's Packing	. 13
4.0445120044 Injector's Storage Standard	. 14
5. Company Information	. 15
5.1. Company Introduction	. 15
5.2. Sales-men's Contact Information	. 16
5.2. Sales-men's Contact Information 6. Copyright Statement	. 16
SATERIL	st ^{el}
SANDALL	stari

Mob/WhatsApp: +86 13410541523 Email : ruby@shumatt.com © 2022 Shenzhen Shumatt Technology Co., Ltd

and a state of the state of the

. mpr

Tel: +8675523215133 Website : www.shumatt.com

ATTACK STATE STATE STATES

0445120044 Injector CRIN1-14/16 Technical File

SALER

SPLER

STATE

1.0445120044 Injector's Introduction

AND CO Streen Streen - State - State 1.1. 0445120044 Injector's Basic Information

Title	China made new high quality diesel injector 0445120044 fuel injector CRIN1-14/16
SKU 1 🔗	G1W20445120044/ G2W20445120044
SKU 2	W20000B2B120044
1.2. 0445120044 In	njector's Common Part Number

1.2. 0445120044 Injector's Common Part Number

(1) Injector's Exchange Information

	- <u>a</u> <u>a</u> <u>a</u>	
Injector Part Number	Universal Part Number	Re-manufactured Part Number
0445120044	0445120024	0 986 435 527
	There There There	
المحالي المحالي الحالي		이는 가지는 것이 가지 않는 것이 같이 있다.

(2) Injector's Application Information

Injector Part Number	MAN Car Number							
0445120044	51 10100 6049		/	· /	· / ·	/		
0445120024	51 10100 6016	51 10100 6027	51 10100 6049	51 10100 6043	A.M. S	s.m.T. st		
0 986 435 527	51 10100 4043	51 10100 6043	51 10100 6027	51 10100 6049	51 10100 6016	51 10100 9049		
(3) Injector's Part Nu	mber Common Wri	ting	STAILOR TO STAILORT	SPATIST	SPLEIST	ALESSET SIL		

(3) Injector's Part Number Common Writing

0445120044, 0 445 120 044, 0445 120 044, 0445120 044, 0 445120044, 0 445120 044, 0445120024, 0 445 120 024, 0445 120 024, 0445120 024, 0 445120024, 0 445120 024, 0 986 435 527

1.3.0445120044 Injector's Matching Information

Vehical brand	Series	Car Model	Engine Model	Production date	Power KW	Horse power	Emission Standards	Manufa cturer	Emiss ions(L)	Cylinde r	Power Source V
MAN	హో హో TGA 18 t	TGA 18.480 F, FA	D 2876 LF12	2002/10- 2006/09	353	480 480	en si	5 5 STAT	12.8	6	24 5
MAN	TGA 18 t	TGA 18.480 FC, FK, FL	D 2876 LF12	2003/07- 2006/09	353	480	NUM SI	and the second	12.8	6	م علاق م
MAN	TGA 18 t	TGA 18.530	D 2876 LF13	2002/11- 2004/09	390	530 ^{(**}	NUTRICE SI	STORE S	12.8	6.000	24 ک ^{ری}
MAN	TGA 18 t	TGA 18.530 FC, FK, FL	D 2876 LF13	2002/10- 2006/09	390	530	ALTER ST	AND TO S	12.8	s. 6	ة ي
. and	. and	ai ^{dh} cai	A. Mark	·		. and	. and	and the			đ., .

Mob/WhatsApp: +86 13410541523 Email : ruby@shumatt.com © 2022 Shenzhen Shumatt Technology Co., Ltd

		5110		amate	reem	101067	00., 20	G			
MAN	TGA 26 t	TGA 26.480 DA	D 2876 LF12	2002/09- 2006/09	353	1 ⁴⁸⁰ -	Euro 3	NORTH S	12.8	S. 635	د چ
MAN	TGA 26 t	TGA 26.480 FD	D 2876 LF12	2003/06- 2006/09	353	480	Euro 3-ga	STATE S	12.8	3°6	ा ुर्ग्24
MAN	TGA 26 t	TGA 26.480 FN, FP, FV	D 2876 LF12	2003/05- 2006/09	353	480 5	Euro 3	STATE S	12.8	3 ² 6	24
MAN	TGA 26 t	TGA 26.480 FN, FP, FV	D 2876 LF12	2003/07- 2005/06	353	480	Euro 3	1977 - S	12.8	6 6	چې 24
MAN	TGA 26 t	TGA 26.530 DA	D 2876 LF13	2004/05- 2004/09	390	530	Euro 3	1997 - 5 1997 - 5	12.8	6	چې 24
MAN	TGA 26 t	TGA 26.530 FD	D 2876 LF13	2002/10- 2006/09	390	530	Euro 3	anna a	12.8	6	چې 24 مې
MAN	TGA 26 t	TGA 26.530 FN, FP, FV	D 2876 LF13	2002/09- 2005/06	390	530	Euro 3	NOT S	12.8	6 37- ⁰⁰¹	ج چې
MAN	TGA 26 t	TGA 26.530 FN, FP, FV	D 2876 LF13	2002/11- 2006/09	390 ¹¹	530 ¹¹	Furo 3	San S	12.8	S. 10.00	्र अपि
MAN	TGA 32 t	TGA 32.480 FFD	D 2876 LF12	2004/05- 2006/01	353	480	Euro 3	STATE S	12.8	SN ⁹⁶³⁵⁵	ં ્ર્ર. ²⁴
MAN	TGA 32 t	TGA 32.530 DA	D 2876 LF13	2004/05- 2004/09	390	530 S	Euro 3	Start's	12.8	576 ⁰⁰⁰¹	्र 24
MAN	TGA 33 t	TGA 33,480 DA	D 2876 LF12	2002/10- 2006/09	353	480	Euro 4	Starting St	12.8	6 6	24
MAN	TGA 33 t	TGA 33.480 FD-WW	D 2876 LF12	2003/06- 2009/03	353	480	Euro 4	1997 - 50 - 50 T	12.8	6 6	्र्स 24 र
MAN	TGA 33 t	TGA 33.480 FD-WW	D 2876 LF25	2006/07- 2009/03	353	480	Euro 4	STAN S	12.8	6 - M	24
MAN	TGA 33 t	TGA 33.480 FDA-WW	D 2876 LF12	2003/08- 2009/03	352	480	Euro 4	AND TO S	12.8	6	ో ర ²⁴
MAN	TGA 33 t	TGA 33.530 DF	D 2876 LF13	2002/10- 2006/09	390	530	Euro 4	AND TT S	12.8	6	24

Mob/WhatsApp: +86 13410541523 Email : <u>ruby@shumatt.com</u> © 2022 Shenzhen Shumatt Technology Co., Ltd

				iumatt	Com	101067	00., 20				
MAN	TGA 35 t	TGA 35.310 FFD	D 2876 LF13	2004/06- 2006/03	390	2 ⁵³⁰ -	Euro 4	NOUNT S	12.8	S1 ⁶⁵⁰⁵	د چر <mark>24</mark>
MAN	TGA 35 t	TGA 35.310 FFD	D 2876 LF13	2004/07- 2004/10	390	530 5	Euro 4-ga	STATE S	12.8	s≓6 ⁰⁰⁵	ा ुर्ग् <mark>र</mark> 24
MAN	TGA 35 t	TGA 35.310 FFD	D 2876 LF13	2004/07- 2004/09	390	530 S	Euro 4	STREET S	12.8	9 ⁰ 6	24
MAN	TGA 35 t	TGA 35.310 FFD	D 2876 LF13	2004/08- 2006/03	390	530	Euro 4	1200 C 5	12.8	578-977 6	24 24
MAN	TGA 35 t	TGA 35.480 FFD	D 2876 LF12	2003/07- 2006/03	352	480	Euro 4	ann i	12.8	6	्रा ^{के} 24 र
MAN	TGA 35.t	TGA 35.480 FFD	D 2876 LF12	2003/09- 2006/09	353	480 980 ⁷⁰⁷¹¹	57 SA	ann i a	12.8	. 6	24
MAN	TGA 35 t	TGA 35.530 FFD	D 2876 LF13	2004/06- 2006/03	390 - 1 2 ⁷³⁸ - 2	530	Euro 4	San S	12.8	6 37	्र 24 इ.स.
MAN	TGA 35 t	TGA 35.530 FFD	D 2876 LF13	2004/07- 2004/10	390	530 ⁻¹	Euro 4	Start's	12.8	51 ⁶ 505	5 € ²⁴
MAN	TGA 35 t	TGA 35.530 FFD	D 2876 LF13	2004/07- 2004/09	390	530	Euro 4	LEBRIT S	12.8	S. 6	् ्र ²⁴
MAN	TGA 35 t	TGA 35.530 FFD	D 2876 LF13	2004/08- 2006/03	390	530 S	Euro 4	State 5	12.8	6	24
MAN	TGA 37 t	TGA 37,480 VF	D 2876 LF12	2004/08- 2006/09	353	480	Euro 4	Service Services	12.8	676 6	⇒ ² 24
MAN	TGA 37 t	TGA 37.530 VF	D 2876 LF13	2003/06- 2006/09	390	530	Euro 4	1997 - 5 1997 - 5	12.8	6	्रा ^{र्ड} 24 ा
MAN	TGA 40 t	TGA 40.480 DF	D 2876 LF12	2004/10- 2006/03	353	480	Euro 4	1000 - 5 1000 - 5	12.8	6	چې 24 1
MAN	TGA 40 t	TGA 40.480 FD-WW	D 2876 LF12	2004/11- 2009/03	353 J	480 11	Euro 4	STATE OF	12.8	6	ू 24 ्रि
MAN	TGA 40 t	TGA 40.480 FD-WW	D 2876 LF25	2006/07- 2009/03	353	480	Euro 4	STATE S	12.8	6 STRATE	ि 24 ्र ^{्क}

Mob/WhatsApp: +86 13410541523 Email : <u>ruby@shumatt.com</u> © 2022 Shenzhen Shumatt Technology Co., Ltd

MAN	Stor IGA 41 t Stor	TGA 41.480 FFD	D 2876 LF12	2003/05- 2006/09	353	* ⁴⁸⁰ s	e ^{reuro 4}	STATE S	12.8	SH ⁸⁶⁰⁰⁹	5 \$ ²⁴
MAN	7GA 41 t	TGA 41.480 FFD-WW	D 2876 LF12	2003/06- 2009/03	353	10 ⁷⁴⁸⁰ 5	Euro 4 g	MONT'S	12.8	31 ⁶ 6	ं ुर्ग् <mark>2</mark> 4
MAN	TGA 41 t	TGA 41.480 FFD-WW	D 2876 LF25	2006/07- 2009/03	353	480 5	Euro 4	AND THE S	12.8	376 ⁰⁰⁵	24
MAN	TGA 41 t	TGA 41.530 FFD	D 2876 LF13	2003/07- 2004/09	390	530	Euro 4		12.8	6	24 24
Strates .	sh ^{an} sh	the second	de la composición de La composición de la c	de a	1997 - S	and a start of the	North St	5	4.50°	States -	S.
MAN	TGA 41 t	TGA 41.530 FFD	D 2876 LF13	2004/05- 2004/09	390	530	Euro 4		12.8	6	24

1.4.0445120044 Injector's Parameter

Adaptation System: Common Rail System Injector Series: 120 Series

Parameter Performance: CRIN1-14/16 Matching Accessories: Gasket F 00R J02 175 (7.73*14.36*1.49) Injector Type: Electromagnetic Injector Support System Maximum Pressure: 1,600

Vehicle Configuration Information: MAN

1.5.0445120044 Injector's Specifications and Dimensions

Injector Size: 21.5cm*4 cm *4 cm = 344cm³ (L*W*H Injector Net Weight: 0.55kg Gross Weight: 0.6kg Injector Quality: China Made Brand New Package Size: 28cm*7 cm *7 cm = 1372 cm³ Injector Type: Diesel Common Rail Injector MOQ: 4 Pieces

1.6. 0445120044 Injector's Quality Control

(1) Injector Testing

All injector spare parts are tested for electrical characteristics, accuracy, high temperature, low temperature, withstand voltage, leakage, durability, and various working conditions.

(2) Injector Assembling

And the quality control of the injector production and installation process, our company strictly follows the standard product installation data and product installation steps to install, such as injector stroke test, injector solenoid valve tightening torque, injector nozzle tightening torque,

(3) Injector Inspection

The factory inspection of the injector is undergone full inspection, random inspection, and batch

Mob/WhatsApp: +86 13410541523 Email : <u>ruby@shumatt.com</u> © 2022 Shenzhen Shumatt Technology Co., Ltd

SHUMATT Shenzhen Shumatt Technology Co., Ltd

inspection three inspections. Different brands of test benches are used to test the same fuel injector for a total of no less than three times for factory inspection, and the fuel injector installation testing environment are progressed in dust-free workshop.

100 D_{22} 100 100 55 25 1.7. 0445120044 Injector's Customized Service

(1) Injector's Customized Service: Meet the customized needs of OEM manufacturers for shell lettering, logo engraving, injector internal packaging, injector external packaging and labels customized, etc.

30. 30. 3.				41."		0	30.	34.0	. Sec.
	an an	SAN SA		6125 Series		35 35			144 141 (010) - 2001 (01) 1 ₁₁₁ - 2001
Injector nozzle engra	aving	Injector hous and QR	1	njector sole engra			Injector b	ox and lab	el
(2) Inin Andre Com	6 9 C	Section 1.	 100	10 C 10	- 1. C.	. 1. 20			с. . С

(2) Injector's Customized Service Requirements:

The purchased of customized injector are not less than 10 pieces.

Customized injector packages no less than 1000 pieces.

330⁸⁷ Customized products involve the need of specify logo, the OEM manufacturer needs to provide trademark authorization and the sample of logo image file. E.C. est. S.C. at N 18 C

A Once the customized fuel injector is sold, it cannot be returned or exchanged if there is no quality problems.

SPUBBLI 1.8.0445120044 Injector's Packing List and Package Size

(1) Injector Spare Parts List

No.	1	2	3
and			
States States			
Name Description	Fuel Injector Fuel injector part number: 0445120044	O-Ring Ensure to meet the standard of the sealing performance between the injector and the engine	Gasket Made of brass, used to ensure the tight fit between the injector cap end and the engine
No.	4 <u>-</u> -	× × 5 × ×	_ 6_ ~
Image			
Name	Nozzle Protective Cover Cap	Injector House Protective Cover Cap	Solenoid Valve Protective Cap
Description	Protect nozzle holes from being polluted and blocked	Protect oil inlet from being polluted and blocked	Protect the solenoid valve body and terminals from being damaged by external forces
No.	7	8	9
SAMANAN SAMAN Image SAMANAN SAMAN			
Name	VCI Anti-rust Bag	Bubble Bag	Injector Packing Box
Description	Prevent fuel injector from	Prevent the injector from being	Place injector and injector

Mob/WhatsApp: +86 13410541523 Email:ruby@shumatt.com © 2022 Shenzhen Shumatt Technology Co., Ltd Tel: +8675523215133 Website : www.shumatt.com

SPATIST SPATIST

damaged by external forces rusting accessories Minors are forbidden to use the fuel injector assembly, O-ring, gasket, nozzle protective cover, fuel injector house protective cover, solenoid valve protective cover, VCI anti-rust bag, and air bubble bag to avoid personal injury. $\mathcal{A}^{(n)}_{\mathcal{D}_{\mathcal{D}}}$ dh. 10


• O-ring and gasket are disposable installation accessories, and need to be replaced for $s \delta^{2\gamma}$ re-installation.

A The nozzle protective cover, the injector house protective cover, and the solenoid valve protective cover are recyclable accessories that can be reused.

VCI anti-rust bags and bubble bags are non-degradable materials, please dispose of them properly 91^{4,555} Share after using.

▲ The injector and the installation parts should be coated with appropriate sealing oil during SPASSATT STREET TO THE REAL SPERMENT SPARONTY installation.

(2) Injector Box Size

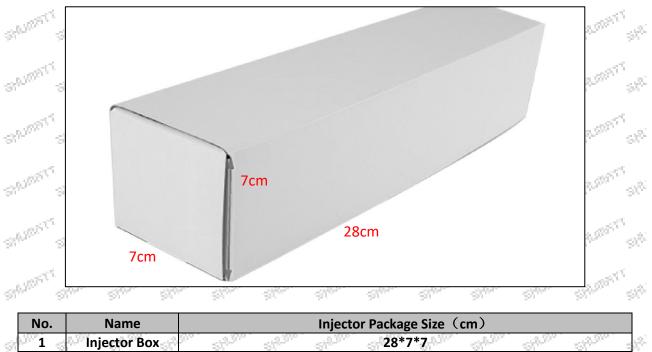

1.9.0445120044 Injector's Testing Standard and Certificate

STREE. MARY'S 17400 We can provide the factory quality inspection test report of each injector to ensure that each injector delivered meets the engine performance indicators.

- 18 Bar



Mob/WhatsApp: +86 13410541523 Email:ruby@shumatt.com © 2022 Shenzhen Shumatt Technology Co., Ltd

		测试	报告	4.05.2019	10:42:01
录伸企业:					
412:		284	t;		
()耳:		403	8人:		
WORK:					
tið.		127 H	9单位。		
倚阗:		W7	9姓名:		
秋季说道:					
3州名称:	ND HE OF				
<u>전</u> 등·종취등:					
20.044.01					
ize one: Ella:					
			结里		
	00000-6511		結果	1032155	
Kila:			結果 ^{Kitak Oth}	(1942 aug	
Ella A : Ilenia 179 : C Ilenia 1757 :	00000-6511	检测		100 žaug 100 žaug	~
EELA: EENAUU: C ISACUST: Bade	0000-6511 \$166581	检测 ******# 	REEKOED	48 8 4 2 7 5 1 6 30 8 4 7 1 6 30 8 4 7 1 6	* *
Ella A : Ilenia 179 : C Ilenia 1757 :	00:000-6511 10:000-6511 10:000-6511	检测 94%38	8528.083 43	30.84.4.8	~ ~ •
KELAR: EENERTY: C EENERTST: Fact: WEENE Haa:	2012002-6511 助年65米的 32 33	检测 ******# 	R588.083 65 757	48 8 4 2 7 5 1 6 30 8 4 7 1 6 30 8 4 7 1 6	
KELA: EENSIVE: C ESKETST: Fad: WEN:	(9500)-6511 略成時間 32 33 33	检测 990%28 	8688.08% 25 757 C3	414555 914555 914555	
KELAR: EENERTY: C EENERTST: Fact: WEENE Haa:	(9500)-6511 申収(2後前 34 35 35 315	检测 948%注题 	REAKORD 65 757 67 67	814215 814215	

SHUMATT

1.10.0445120044 Injector's Warranty Instructions

(1) . Product Warranty Conditions and Instructions

It is necessary to provide pictures, videos, or test reports detected by the injector inspection equipment when the injector is abnormal during use as evidence to feed back to the salesman. Abnormal conditions are properly explained such as: 1.Smoke, 2. Engine shake, 3. Difficulty starting the engine, 4. Engine noise, 5. oil leakage etc.

(2) . Injector Warranty Coverage

Within 15 days after customer receives the 0445120044 injector, if there is a performance failure and the product has no appearance damage, customer can choose to replace it or repair it;

If the 0445120044 injector has performance problems during the warranty period (3 months), and it is confirmed that it is product's problems after testing, you can contact our salesmen to replace the same model or a reworked product with the same performance for free;

If the injector house has obvious scratches, it can only be repaired and it will be returned as it is if the product is confirmed to be fault-free.

▲ Tips: For products not covered by warranty, our company can provide paid maintenance services. For products after paid repaired, the same performance problem will have a free warranty period within 3 months from the date of repairing.

(3) . Injector Out of Warranty Coverage

The warranty period has expired.

Injector failure caused by high temperature, high pressure, humidity, rain and snow, saline-alkali land, earthquake, and used in abnormal environment.

Customer disassembles or repairs the injector personally resulting in damage to the injector.

Injector damage caused by man-made reasons (throwing, strong magnetic field magnetization, set fire). Injector failure or injector damage caused by non-injector design, technology, manufacturing, quality and other issues.

Injector failure due to system pressure exceeding system approved pressure.

Injector failure caused by system voltage exceeding approved voltage.

Injector failure caused by impurities (water, lead, aluminum powder, iron powder, sulfide) in the system

Mob/WhatsApp: +86 13410541523 Email : <u>ruby@shumatt.com</u> © 2022 Shenzhen Shumatt Technology Co., Ltd

fuel exceeding the standard requirements.

Injector failure caused by not installing according to the tightening torque specified in the vehicle engine maintenance manual (the tightening torque is too large or too small).

Injector failure caused by not following the installation angle specified in the vehicle engine maintenance manual.

Injector failure caused by not following the cleaning requirements specified in the vehicle engine maintenance manual.

Injector failure caused by failure to replace consumable parts as specified in the vehicle engine maintenance manual.

Injector failure caused by not complying with the intake system fit clearance and exhaust system fit clearance requirements specified in the vehicle engine maintenance manual.

Failure to replace the consumable parts and the fitting clearance of the oil inlet system pipeline and the fuel injector connection in accordance with the fuel intake system specified in the vehicle engine maintenance manual.

1.11.0445120044 Injector's Manufacturer

Injector's manufacturer: Shenzhen Shumatt Technology Co., Ltd

2.0445120044 Injector Technical Support

2.1.0445120044 Injector's Part Number Location




	No.	Name
c\$		brand, logo, part number,
	Sar. 🖌 - Sar.	series number
	B	nozzle part number
ç\$	n at the at	the state state state at

2.2.0445120044 Injector's Application Scenarios

Common rail system is an oil supply method refers to the diesel oil from the fuel tank sucked out by the gear pump through the oil-water separator and the gear pump to diesel fine filter, high-pressure pump, common rail pipe, and fuel injector, all together with the closed-loop fuel supply system composed of sensors and ECU that completely separates the generation of injection pressure and the injection process from each other.



Mob/WhatsApp: +86 13410541523 Email : <u>ruby@shumatt.com</u> © 2022 Shenzhen Shumatt Technology Co., Ltd

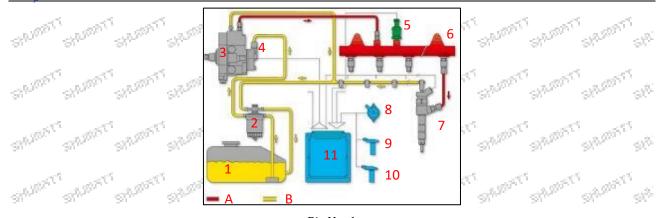

	1	25	Pic	: No. 1	h h h		at at
No.	Name	No.	Name	No.	Name	No.	Name
1	Tank	5	Common Rail Pressure Sensor	9	Engine Crankshaft Sensor	A	High Pressure Oil Circuit
\$ ^{10,00**}	Diesel Filter	6	Common Rail Pipe	10	Camshaft Sensor	в	Low Pressure Oil Circuit
3	High-Pressure Pump	് 7	Injector	11	ECU Electronic Control Unit	100	The The
4	- Fuel Gear Pump	8	Accelerator Pedal	all the second	all all all	an a	and all all

2.3.0445120044 Injector's Installation

SHUMATT

(1) .0445120044 Injector's Installation Precautions:

▲ The replacement of the fuel injector must strictly follow the electrical system, the approved pressure of the low-pressure fuel intake system, the approved pressure of the high-pressure fuel circuit system, and fuel system replacement consumables requirements (including the low-pressure fuel circuit system filter and the high-pressure fuel circuit) specified in the vehicle engine maintenance manual,

A Replacement of wearing parts of the fuel system, cleaning requirements for the connection between the fuel system and the injector, the fitting clearance of the fuel injector connection, the installation angle and tightening torque of the injector, the fitting clearance of the intake system, and the fitting clearance of the exhaust system to ensure the service life of the engine and the normal operation of the injector.

▲ When installing the fuel injector on the engine, it is necessary to clean the engine block, cylinder head and other parts connected to the fuel injector, and ensure that there is no dust, carbon deposits, water, rust spots, etc.

Before installing, check whether the fuel injector nozzle gasket has been replaced and installed on the fuel injector.

When installing the fuel injector, apply lubricant between the fuel injector, fuel nozzle sealing gasket and O-ring.

▲ Without replacing new gasket can lead to: deformation of the tight cap of nozzle, deformation of nozzle, deformation of nozzle orifice, oil leakage and air leakage, which will cause serious damage to the fuel injector and nozzle to break and cause damage to the engine.

When installing the injector on the engine, please carefully check the components related to the installation of the injector, such as the injector pressure plate, screw, injector rod and other accessories are not deformed, and install it in strict accordance with the operation steps of the engine maintenance manual.
It is forbidden to operate the bare injector for a long time in an environment with serious dust pollution and corrosion to iron products.

It is forbidden to operate the bare injector for a long time in a strong magnetic field environment.

2.4. 0445120044 Injector 's Reasons for Not Working Normally

(1) There is air in the oil circuit of the engine fuel system.

(2) Vehicle oil pump oil supply system is not normal.

(3) Engine common rail system oil leakage or pressure limiting valve damage.

(4) There is a short circuit, cutting out and poor contact in the wiring harness connected to the fuel injector of the vehicle.

(5) The long-term placement of the injector causes the anti-rust oil to solidify, and the internal components are stuck or the oil holes are blocked.

Before installing, carefully check whether other components in the common rail system except the fuel injector are damaged so as to prevent the fuel injector from not working properly after being replaced.

2.5. 0445120044 Injector 's Causes of Damage

(1) Didn't operate properly according to engine maintenance manual during disassembly or installation, resulting in damage to the injector. 100 C all -120 all's 1780

(2) The fuel oil used for the vehicle does not meet the standard cause damage to the injector, such as: the water content in the fuel oil exceeds the standard, iron powder, aluminum powder, sulfide impurities exceed REPET REFERE ALL REAL the standard, etc.

(3) The engine is not regularly maintained according to the engine maintenance manual (please refer to the vehicle maintenance manual for the maintenance mileage). For example, failure to replace the lubricating oil of the engine system for a long time will cause abnormal wear of the engine, excessive exhaust gas volume or a large amount of carbon deposits inside the engine. The filter is not replaced during maintenance or the replaced filter cannot reach the original filter standard. all above reasons can cause damage to the injector.

(4) The abrasion of the oil pump produces iron powder and aluminum powder enter the fuel injector and cause damage to the fuel injector. Stern Stern 100 1995 -100

(5) The deformation and abrasion of fuel tank result in iron powder or aluminum powder entering the fuel injector and causing damage to the fuel injector.

(6) The fuel injector is damaged due to replacement or adjustment of the relevant parts of the fuel injector. For example, the valve clearance does not meet the standard after the engine is repaired, the replacement or modification of the wiring harness connected to the injector fails to meet the original standard.

(7) The engine is overheated and overloaded for a long time working results in damage to the fuel injector. (8) The injector will be damaged naturally at the end of its working life.

(9) The injector is magnetized (injector parts' magnetic exceeded) causing the injector to not work properly. Before replacing the fuel injector, please check the engine parts carefully according to the engine maintenance manual to avoid the fuel injector being damaged again after replacement. $\mathcal{C}^{\mathbb{R}^{N}}$ -stor 38^{0,09} $\mathcal{A}^{\mathcal{A}}$ S^{0}

2.6.0445120044 Injector's Technical Support Obtaining Methods

(1) Injector Technical File, visit <u>http://shumatt.com</u> to get the technical file.

(2) Injector Technical Videos

 $e^{i \hat{U}_2}$ Facebook: Visit https://www.facebook.com/hison.li to get the technical videos, constantly follow can get more information.

YouTube: https://www.youtube.com/channel/UCByvYBx7VjV mAfxh Hu-aw to get the technical videos, constantly follow can get more information.

Shumatt: Visit http://shumatt.com to get the technical videos.

Mob/WhatsApp: +86 13410541523 Email:ruby@shumatt.com © 2022 Shenzhen Shumatt Technology Co., Ltd

(3) Injector Information Query Software

TruckBook Parts EPC APP, Android/Apple App Store download and install, visit http://shumatt.com to get the download and installation tutorial

(4) Search The fuel injector test data through TruckBook Parts EPC APP. $\mathbb{R}^{\mathbb{N}}$

3.0445120044 Injector's Purchase and Delivery

3.1.0445120044 Injector's Purchase Payment Term

Payment Terms: T/T, PayPal, Alipay, WeChat

Please contact our salesmen for specific payment information.

1000 . Then The 3.2.0445120044 Injector's Main Sales Markets

Injector main sales markets: Asia, Europe, North America, South America, Africa etc. 2.000

665

and water

n 90^{267, 2} a di ^{gan} 3.3.0445120044 Injector's Declaration Requirements

Shumatt can assist customers to provide the following documents for import customs clearance: : All contract, invoice, packing list, bill of lading, insurance policy, certificate of origin, etc.

3.4.0445120044 Injector's Shipping Ways

Destination in China areas: SF Express, Debon Express, the corresponding logistics company can be provided according to customer requirements in special cases.

179

Destinations out of China's areas: DHL, UPS, FedEx, TNT air, ocean or other shipping methods required by customers.

3.5.0445120044 Injector's Lead time

Lead time: Send out within 3 – 7 working days after receiving payment (Except for special products and special cases).

3.6.0445120044 Injector's Logistics Time for Destination Out of China's Areas

DHL Logistics Time :

15

Country or Region of Departure	Hong Kong, China	Other Countries or Regions of Asia	Australia and New Zealand	Europe	America	Other Countries
China's Mainland	7 Days	7 Days	8 Days	8 Days	8-12 Days	7-10 Days

UPS Logistics Time: Country or Region of Departure: China's Mainland

Country of Destination	Estimated Arrival Time	Country of Destination	Estimated Arrival Time	Country of Destination	Estimated Arrival Time
Japan	3 Days	UK	5-7Days	Egypt	5-7 Days
Turkey	5-7 Days	Singapore	3 Days	Switzerland	5-7 Days
Bahrain	5-7 Days	Latvia	7-10 Days	New Zealand	7-10 Days
Sri Lanka	5-7 Days	Thailand	3 Days	Austria	5-7 Days
Romania	5-7 Days	Vietnam	3-5 Days	Estonia	5-7 Days
Malaysia	3-5 Days	Israel	5-7 Days	Mexico	7-10 Days
France	5-7 Days	America	5-7 Days	United Arab Emirates	5-7 Days
Italy	5-7 Days	Netherlands	5-7 Days	Bengal	7-10 Days

Mob/WhatsApp: +86 13410541523 Email:ruby@shumatt.com © 2022 Shenzhen Shumatt Technology Co., Ltd

		enzhen Shumatt	Technolog	gy Co., Lla	
Lebanon	5-7 Days	Philippine	3-5 Days	Greece	7-10 Days
South Korea	3 Days	Spain	5-7 Days	Myanmar	5-7 Days
Canada	5-7 Days	Germany	5-7 Days	Saudi Arabia	7-10 Days
Portugal	5-7 Days	Australia	5-7 Days	South Africa	7-10 Days
Denmark	5-7 Days	Belgium	5-7 Days	Ukraine	7-10 Days
India	7-10 Days	Qatar	7-10 Days	Poland	5-7 Days
Indonesia	3-5 Days	Morocco	7-10 Days	Pakistan	7-10 Days
Kuwait	7-10 Days	Trans Trans Tra	Frank Press	t and and	12000

The logistics time is for reference only, subjects are according to the actual arrival.

3.7.0445120044 Injector's Packing

Domestic express packaging: Usually wrapped in waterproof scotch tape, such as picture No.2. **International express packaging:** Wrapped with waterproof yellow tape After wrapping the black protective film, such as picture No. 3.

Pallet Shipping: Use fumigation free and recycling trays that meet export requirements, and use white wrapping protective film to wrap and bind with cable ties for the outside, such as picture No. 4, also, the products can be packaged according to customers' requirements.

• The packing tray is made of plastic and can be recycled.

Transparent tape, yellow tape, black wrapping protective film, white wrapping protective film are non-degradable materials, please dispose of them properly.

Minors are prohibited from using transparent tape, yellow tape, black wrapping protective film, and white wrapping protective film to avoid personal injury.





Mob/WhatsApp: +86 13410541523 Email : <u>ruby@shumatt.com</u> © 2022 Shenzhen Shumatt Technology Co., Ltd



39.57 Pic No. 4 Pallet Shipping: Use pallet that meet export requirements, and use white wrapping protective film to wrap and bind with cable ties

4.0445120044 Injector's Storage Standard

(1) Choose a suitable storage place

The warehouse and cargo yard where the fuel injector is stored should be kept clean and dry, and away from the factory buildings that generate harmful gases and dust; do not mix with acids, alkalis, salts and other substances; the storage place should have a good drainage system; the cargo yard should be flattened with gravel or furnace ash etc. to enhance the water permeability of the surface layer to keep the reservoir area dry.

(2) Strict requirements of warehousing

Strict inspections should be carried out when the fuel injectors are put into storage, the surface cleaning work should be done well to remove water traces, oil stains, ash and other dirt, remove the rust and do antirust treatment in time. Packaged injectors must be protected from damage.

(3) Keep the warehouse dry and preventing moisture

The relative humidity is usually below 70% for the fuel injectors placed in the room, and the corrosion and h and the of the fuel injectors is significantly reduced. 1000 all's 65

Injectors must be stored in the warehouse, and they are forbidden to store in the same warehouse with commodities with high water content. SPREAT SHUMPY

(4) Stack Properly

After the injector is exposed to rain, the corrosion rate will increase significantly. The purpose of sealing is to isolate the injector from rainwater and humid air, so the warehouse window should be checked in time to avoid rainwater entering the warehouse - Sharr

If the fuel injector package is damaged, it should be repaired or replaced; when the package is damp, the packaging material should be dried; if the original anti-corrosion and oil applied at the factory is found to be damaged or dried up, it should be cleaned and re-applied oil in time.

It is forbidden to leave the injector exposed in the air for a long time. - 100⁰⁴⁷⁵

Mob/WhatsApp: +86 13410541523 Email:ruby@shumatt.com © 2022 Shenzhen Shumatt Technology Co., Ltd

1. 19 C. C.

A It is forbidden to store acids, alkalis, salts and other substances together with the injector.

NOR CL

. 1997 - C

. all 1

- The unpacked fuel injector must be rust-proof during secondary storage.
- 5. Company Information

- **Office Locations**
- Global Exhibitions

5.1. Company Introduction Chinese Name: 深圳市舒马特科技有限公司 English Name: Shenzhen Shumatt Technology Co., Ltd

Mob Phone/WeChat: +86-13410541523

HK Telephone: +852-67653519

Telephone: +86-755-23215133

Email: ruby@shumatt.com

Website: www.shumatt.net

• Shenzhen Office: 11-12, Floor 14, Building 13, Qinchengda Building, Exit A, Honglang North Subway Station, Bao'an District, Shenzhen, China's Mainland

STRUMPT'S RUPPT'

SPERMENT

SPAINS

Shenzhen Office: Room 428-430, Building B, Huafeng Zhigu Technology Industrial Park, Exit B, Fuyong Metro Station, Bao'an District, Shenzhen, China's Mainland

Hong Kong Office: Jianfa Street Industrial Zone, Tuen Mun, New Territories, Hong Kong, China

and and a state and a state of the state of the

Mob/WhatsApp: +86 13410541523 Email : <u>ruby@shumatt.com</u> © 2022 Shenzhen Shumatt Technology Co., Ltd

After-sales Service Address: Please contact our salesmen to obtain and provide the corresponding product maintenance reasons (Reference: 1.10. 0445120044 Injector Warranty Instructions)

No.	Name	Name WeChat/WhatsApp Email		Facebook	YouTube
1	Ruby	+86-13410541523	ruby@shumatt.com	Hison Li	Hison Li
2,5000	lvy south	+86-18025299821	sales@shumatt.com	Ivy Shumatt	Shumatt IVY
3	Rebecca	+86-18025349821	sales01@shumatt.com	Rebecca SHUMATT	SHUMATT Rebecc
4	Janny	+86-18028749821	sales02@shumatt.com	Janny shumatt	Janny Shumatt
.5	Sam	+86-13316859821	Sales8@shumatt.com	Shumatt Sam	Sam Shumatt
6	Natalie	+86- 18938945856	sales15@shumatt.com	Shumatt Natalie	Lin Natalie
7	Ada	+86-1342286353	sales5@shumatt.com	Shumatt Ada	Ada Shumatt
8	Hison Li	+86-18318811871	web@shumatt.com	Hison Li	Hison Li
9	Mecca	+86-18938948618	sales11@shumatt.com	Shumatt Mecca	Shumatt Mecca
10	Eric	+86 18319033618	sales3@shumatt.com		
11	Wayne (Joaquín en español)	+86-13316959821	wayne@shumatt.com	shumattwayne	Wayne Shumatt
12	Sylvia	+86 18312499884	sales6@shumatt.com	Star Star	18 - 18 - 18 - 18 - 18 - 18 - 18 - 18 -
		Visit http://shumatt.com to ob	tain the latest information of salesme	en	
	d d	PS: Shumatt's sales-men's e	mails are all end with @shumatt.com		a a

6. Copyright Statement

-50

al C

The copyright of any contents (including but not limited to parameters, data, text, charts, images, sounds or videos, etc.) provided in "0445120044 Injector CRIN1-14/16 Technical File" belong to Shenzhen Shumatt Technology Co., Ltd. Without the prior written permission of Shenzhen Shumatt Technology Co., Ltd., you are not allowed to modify any contents in "0445120044 Injector CRIN1-14/16 Technical File" in any way. At the same time, any conditions to spread, re-post, display the contents of "0445120044 Injector CRIN1-14/16 Technical File" should indicate that the cited article is from Shenzhen Shumatt Technology Co., Ltd., Any actions failure to follow above conditions to use "0445120044 Injector CRIN1-14/16 Technical File" will violate the "Copyright Law of the People's Republic of China" and other laws and regulations and the provisions of 12.50005 relevant international conventions. $\varphi^{(k)}$

Mob/WhatsApp: +86 13410541523 Email:ruby@shumatt.com © 2022 Shenzhen Shumatt Technology Co., Ltd