



SHUDDIT

0445120238 Injector CRIN1-14/16 Technical File

SPEEDER

 $S^{(0)}$

Stand Strand Strand Strand Strand Strand Strand	STATIST.	SPR. ERST.	SPR. STATES	al ^a
1.0445120238 Injector's Introduction				2
1.0445120238 Injector's Introduction 1.1. 0445120238 Injector's Basic Information				2
1.2. 0445120238 Injector's Commo bn Part Number	977 ·	37°**	98°°	2
1.3.0445120238 Injector's Matching Information				
1.4.0445120238 Injector's Parameter				3
				3
1.6. 0445120238 Injector's Quality Control 1.7. 0445120238 Injector's Customized Service	and the second second	and the second sec		4
1.8.0445120238 Injector's Packing List and Package Size	Stor. 1	57°°°	ster i	4
1.9.0445120238 Injector's Testing Standard and Certificate				5
1.10.0445120238 Injector's Warranty Instructions	39.5 ^{00°} .	di ^{gara} .	Aller .	6
2.0445120238 Injector Technical Support	and the second			7
1.11.0445120238 Injector's Manufacturer 2.0445120238 Injector Technical Support 2.1.0445120238 Injector's Part Number Location	31 ⁰⁰⁰	si	9 ⁷⁰ :	25
2.2.0445120238 Injector's Application Scenarios				7
2.3.0445120238 Injector's Installation	A. S. C. C.	an a	an a	8
2.4. 0445120238 Injector 's Reasons for Not Working Normally				9
2.5. 0445120238 Injector 's Causes of Damage		1. 18 C	1. 18 E	9
2.6.0445120238 Injector's Technical Support Obtaining Methods	877 ·	38°°°	9X	9
3.0445120238 Injector's Purchase and Delivery				10
3.0445120238 Injector's Purchase and Delivery 3.1.0445120238 Injector's Purchase Payment Term	att ^{starr} .	al and	de la compañía de la	10
3.2.0445120238 Injector's Main Sales Markets	and the second	and the second second		10
3.4.0445120238 Injector's Shipping Ways	977 ·	51°°	57°°	10
3.50445120238 Injector's Lead time				10
3.6.0445120238 Injector's Logistics Time for Destination Out of China's Ar				
4.0445120238 Injector's Storage Standard				12
5. Company Information	54 · · · ·	ST. :	97°	13
5.1: Company Introduction				13
5.2. Sales-men's Contact Information	al ^{an c}	an	g	14
6. Copyright Statement				14
SHARE	Strand.	SPLEIN .	SPECTOR .	st ^{iti}
SANDAL SHOWL SHOWL SHOWL SHOWL SHOWL SHOWL SHOWL SHOWL	Statistics.	374.2355	512.00777	st ^e
SALASTI S	ALCONT.	SPARINT'	SPLEISTY	şi ^{şi}
The film the time the time the trans the trans	. and		17600	

Mob/WhatsApp: +86 13410541523 Email : <u>ruby@shumatt.com</u> © 2022 Shenzhen Shumatt Technology Co., Ltd

0445120238 Injector CRIN1-14/16 Technical File

1.0445120238 Injector's Introduction

Street Street Street d^{2} 1.1. 0445120238 Injector's Basic Information

Start Start St	China made new high quality diesel injector 0445120238 fuel injector CRIN1-14/16
SKU ST	G1W20445120238
SKU	G1W20++5120250
SKU	The Day Day Day Day Day Day Day
يقير أستجمير أستجمير	ector's Commo hn Part Number

1.2. 0445120238 Injector's Commo bn Part Number

(1) Injector's Exchange Information **Injector Part Number Universal Part Number Re-manufactured Part Number** 0 986 435 505 0445120208/0445120114 0445120238 0445120032/0445120103

(2) Injector's Application Information

Injector Part Number	DODGE Car Number	CUMMINS Car Number
0445120238	5135790AD/5135790AB/05135790AC/R5135790AF/05135790AD/513579 0AC/05135790AB	5263316
0445120208	The The The The The View The The The	5254688
0445120114	5135790AD/05135790AD	4940051
0445120032		3964273/3968158/ 3972887
0445120103	Ster Ster Ster Ster Ster Ster Ster	4937700
0 986 435 505	5135790AD/05263316/R5135790AF/5135790AC/05135790AB/05135790 AC/05135790AD/5263316/5135790AB	5263316

(3) Injector Part Number's Common Writing

all¹ at 1 0445120238, 0 445 120 238, 0445 120 238, 0445120 238, 0 445120238, 0 445120 238, 0445120208, 0 445 120 208, 0445 120 208, 0445120 208, 0 445120208, 0 445120 208, 0445120114, 0 445 120 114, 0445 120 114, 0445120 114, 0 445120114, 0 445120 114, 0445120032, 0 445 120 032, 0445 120 032, 0445120 032, 0 445120032, 0 445120 032, 0445120103, 0 445 120 103, 0445 120 103, 0445120 103, 0 445120103, 0 445120 103, 0 986 435 505 alister aliste

Mob/WhatsApp: +86 13410541523 Email : ruby@shumatt.com © 2022 Shenzhen Shumatt Technology Co., Ltd

1.3.0445120238 Injector's Matching Information

Vehical brand	Series	Car Model	Engine Model	Production date	Power KW	Horse power	Emission Standards	Manufacturer	Emissions(L)	Cylinder	Power Source V
/ =	North Con	Strand S	ALENT SIL	and a second	STRATT	Station 1	States of States	Str. Stranger		1997 - 1995 1997 - 1997	
/		States S	ALES STR		SPERIOUS .	STRACTION S	th ^{allor} stall	States and			

1.4.0445120238 Injector's Parameter

Adaptation System: Common Rail System Injector Series: 120 Series Parameter Performance: CRIN1-14/16 Matching Accessories: Gasket (7.73*14.36*1.49) Injector Type: Electromagnetic Injector Support System Maximum Pressure: 1,600 Vehicle Configuration Information: CUMMINS/DODGE

1.5.0445120238 Injector's Specifications and Dimensions

ත්රි

Injector Size: 21.5cm*4 cm *4 cm = 344cm³ (L*W*H=V) Injector Net Weight: 0.55kg

Gross Weight: 0.6kg Injector Quality: China Made Brand New Package Size: 28cm*7 cm *7 cm = 1372 cm³

Injector Type: Diesel Common Rail Injector MOQ: 4 Pieces

18

1.6. 0445120238 Injector's Quality Control

(1) Injector Testing

All injector spare parts are tested for electrical characteristics, accuracy, high temperature, low temperature, withstand voltage, leakage, durability, and various working conditions.

(2) Injector Assembling

And the quality control of the injector production and installation process, our company strictly follows the standard product installation data and product installation steps to install, such as injector stroke test, injector solenoid value tightening torque, injector nozzle tightening torque,

(3) Injector Inspection

The factory inspection of the injector is undergone full inspection, random inspection, and batch inspection three inspections. Different brands of test benches are used to test the same fuel injector for a total of no less than three times for factory inspection, and the fuel injector installation testing environment are progressed in dust-free workshop.

1.7. 0445120238 Injector's Customized Service

(1) Injector's Customized Service: Meet the customized needs of OEM manufacturers for shell lettering, logo engraving, injector internal packaging, injector external packaging and labels customized, etc.



(2) Injector's Customized Service Requirements:

The purchased of customized injector are not less than 10 pieces. Customized injector packages no less than 1000 pieces.

Customized products involve the need of specify logo, the OEM manufacturer needs to provide trademark ston ston authorization and the sample of logo image file. $\mathcal{G}_{1}^{(2,2)}$ 30

A Once the customized fuel injector is sold, it cannot be returned or exchanged if there is no quality problems. SALOR -SALER

and a start and the .39⁸⁰ .39⁸⁰ 1.8.0445120238 Injector's Packing List and Package Size

	Spare Parts List		ñ	
<u>No.</u>		39.00		20°° - 20°3 - 20°
JAImage Martin		320		
Name	Fuel Injector	10	O-Ring	Gasket F 00R J01 086
Description	SA S	8	Ensure to meet the standard of the sealing	Made of brass, used to ensure t tight fit between the injector cap e
No. ⁵⁷	Calling and a second	d St	performance between the injector and the engine 5	and the engine
Image		y A		shift of the
and an	ő.		170	1
Name	Nozzle Protective Cover Cap	230	Injector House Protective Cover Cap	Solenoid Valve Protective Cap
Description	Protect nozzle holes from being polluted and blocked		Protect oil inlet from being polluted and blocked	Protect the solenoid valve body an terminals from being damaged by external forces
No.	AN 2017 AN 2	19.30	100 and 100 and 100	اللابق والنبي الأبلي
Mage Mail		2.57	57	s# 1
all all	0 	10	State and	
Name	VCI Anti-rust Bag	See.	Bubble Bag	Injector Packing Box
	Prevent fuel injector from		Prevent the injector from being damaged by external forces	Place injector and injector

(A) Interne Comme Dente List

Mob/WhatsApp: +86 13410541523 Email:ruby@shumatt.com © 2022 Shenzhen Shumatt Technology Co., Ltd

Tel: +8675523215133 Website : www.shumatt.com

avoid personal injury.


O-ring and gasket are disposable installation accessories, and need to be replaced for

re-installation.

SPLIDET SHUDET A The nozzle protective cover, the injector house protective cover, and the solenoid valve protective cover are recyclable accessories that can be reused. 18 C at C

2.5⁵⁹⁴

- -Ship ▲ VCI anti-rust bags and bubble bags are non-degradable materials, please dispose of them properly after using.
- A The injector and the installation parts should be coated with appropriate sealing oil during installation.

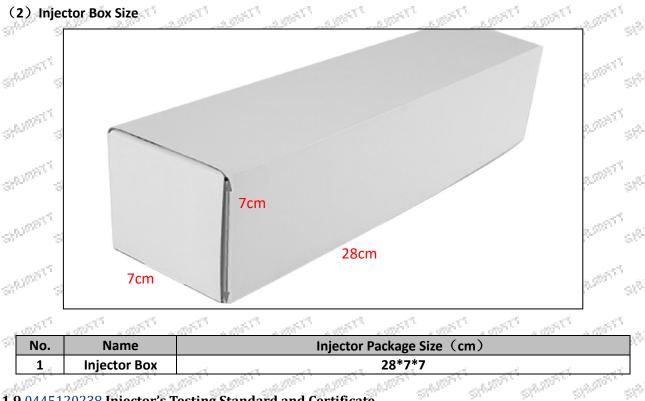

1.9.0445120238 Injector's Testing Standard and Certificate

We can provide the factory quality inspection test report of each injector to ensure that each injector delivered meets the engine performance indicators.



Mob/WhatsApp: +86 13410541523 Email : ruby@shumatt.com © 2022 Shenzhen Shumatt Technology Co., Ltd

		测试	报告	4.05.2019	10:42:01
录伸企业:					
412:		284	t;		
()耳:		403	8人:		
WORK:					
tið.		127 H	9单位。		
倚阗:		W7	9姓名:		
秋季说道:					
3州名称:	ND HE OF				
<u>전</u> 등·종취등:					
20.044.01					
ize one: Ella:					
			结里		
	00000-6511		結果	1032185	
Kila:			結果 ^{Kitak Oth}	(1942 aug	
Ella A : Ilenia 179 : C Ilenia 1757 :	00000-6511	检测		100 žaug 100 žaug	~
EELA: EENAUU: C ISACUST: Bade	0000-6511 \$166581	检测 ******# 	REEKOED	48 8 4 2 7 5 1 6 30 8 4 7 1 6 30 8 4 7 1 6	* *
Ella A : Ilenia 179 : C Ilenia 1757 :	00:000-6511 10:000-6511 10:000-6511	检测 94%38	8528.083 43	30.84.4.8	~ ~ •
KELAR: EENERTY: C EENERTST: Fact: WEENE Haa:	2012002-6511 助年65米的 32 33	检测 ******# 	R588.083 65 757	48 8 4 2 7 5 1 6 30 8 4 7 1 6 30 8 4 7 1 6	
KELA: EENERVI (EENETIST: Fad: WEEN	(9500)-6511 略成時間 32 33 33	检测 990%28 	8688.08% 25 757 C3	414555 914555 914555	
KELAR: EENERTY: C EENERTST: Fact: WEENE Haa:	(9500)-6511 申収(2後前 34 35 35 315	检测 948%注题 	REAKORD 65 757 67 67	814215 814215	

SHUMATT

1.10.0445120238 Injector's Warranty Instructions

(1) . Product Warranty Conditions and Instructions

It is necessary to provide pictures, videos, or test reports detected by the injector inspection equipment when the injector is abnormal during use as evidence to feed back to the salesman. Abnormal conditions are properly explained such as: 1.Smoke, 2. Engine shake, 3. Difficulty starting the engine, 4. Engine noise, 5. oil leakage etc.

(2) . Injector Warranty Coverage

Within 15 days after customer receives the 0445120238 injector, if there is a performance failure and the product has no appearance damage, customer can choose to replace it or repair it;

If the 0445120238 injector has performance problems during the warranty period (3 months), and it is confirmed that it is product's problems after testing, you can contact our salesmen to replace the same model or a reworked product with the same performance for free;

If the injector house has obvious scratches, it can only be repaired and it will be returned as it is if the product is confirmed to be fault-free.

▲ Tips: For products not covered by warranty, our company can provide paid maintenance services. For products after paid repaired, the same performance problem will have a free warranty period within 3 months from the date of repairing.

(3) . Injector Out of Warranty Coverage

The warranty period has expired.

Injector failure caused by high temperature, high pressure, humidity, rain and snow, saline-alkali land, earthquake, and used in abnormal environment.

Customer disassembles or repairs the injector personally resulting in damage to the injector.

Injector damage caused by man-made reasons (throwing, strong magnetic field magnetization, set fire). Injector failure or injector damage caused by non-injector design, technology, manufacturing, quality and other issues.

Injector failure due to system pressure exceeding system approved pressure.

Injector failure caused by system voltage exceeding approved voltage.

Injector failure caused by impurities (water, lead, aluminum powder, iron powder, sulfide) in the system

Mob/WhatsApp: +86 13410541523 Email : <u>ruby@shumatt.com</u> © 2022 Shenzhen Shumatt Technology Co., Ltd

fuel exceeding the standard requirements.

Injector failure caused by not installing according to the tightening torque specified in the vehicle engine maintenance manual (the tightening torque is too large or too small).

Injector failure caused by not following the installation angle specified in the vehicle engine maintenance manual.

Injector failure caused by not following the cleaning requirements specified in the vehicle engine maintenance manual.

Injector failure caused by failure to replace consumable parts as specified in the vehicle engine maintenance manual.

Injector failure caused by not complying with the intake system fit clearance and exhaust system fit clearance requirements specified in the vehicle engine maintenance manual.


Failure to replace the consumable parts and the fitting clearance of the oil inlet system pipeline and the fuel injector connection in accordance with the fuel intake system specified in the vehicle engine maintenance manual.

1.11.0445120238 Injector's Manufacturer

Injector's manufacturer: Shenzhen Shumatt Technology Co., Ltd

2.0445120238 Injector Technical Support

2.1.0445120238 Injector's Part Number Location






No.	Name					
The second second	brand, logo, part number,					
Sur. + Su.	series number					
B	nozzle part number					
the state of	P AP AP AP A					

2.2.0445120238 Injector's Application Scenarios

Common rail system is an oil supply method refers to the diesel oil from the fuel tank sucked out by the gear pump through the oil-water separator and the gear pump to diesel fine filter, high-pressure pump, common rail pipe, and fuel injector, all together with the closed-loop fuel supply system composed of sensors and ECU that completely separates the generation of injection pressure and the injection process from each other.



Mob/WhatsApp: +86 13410541523 Email : <u>ruby@shumatt.com</u> © 2022 Shenzhen Shumatt Technology Co., Ltd

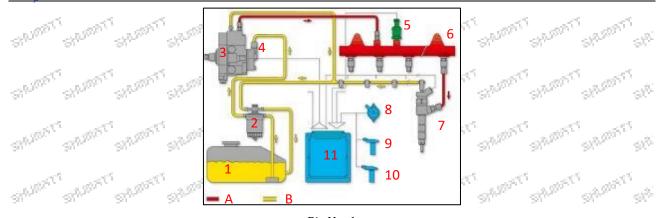

	1	25	Pic	: No. 1	h h h		at at
No.	Name	No.	Name	No.	Name	No.	Name
1	Tank	5	Common Rail Pressure Sensor	9	Engine Crankshaft Sensor	A	High Pressure Oil Circuit
\$ ^{10,00**}	Diesel Filter	6	Common Rail Pipe	10	Camshaft Sensor	в	Low Pressure Oil Circuit
3	High-Pressure Pump	് 7	Injector	11	ECU Electronic Control Unit	100	The The
4	- Fuel Gear Pump	8	Accelerator Pedal	all the second	and all all	an a	en all all

2.3.0445120238 Injector's Installation

SHUMATT

(1) .0445120238 Injector's Installation Precautions:

▲ The replacement of the fuel injector must strictly follow the electrical system, the approved pressure of the low-pressure fuel intake system, the approved pressure of the high-pressure fuel circuit system, and fuel system replacement consumables requirements (including the low-pressure fuel circuit system filter and the high-pressure fuel circuit) specified in the vehicle engine maintenance manual,

A Replacement of wearing parts of the fuel system, cleaning requirements for the connection between the fuel system and the injector, the fitting clearance of the fuel injector connection, the installation angle and tightening torque of the injector, the fitting clearance of the intake system, and the fitting clearance of the exhaust system to ensure the service life of the engine and the normal operation of the injector.

▲ When installing the fuel injector on the engine, it is necessary to clean the engine block, cylinder head and other parts connected to the fuel injector, and ensure that there is no dust, carbon deposits, water, rust spots, etc.

Before installing, check whether the fuel injector nozzle gasket has been replaced and installed on the fuel injector.

When installing the fuel injector, apply lubricant between the fuel injector, fuel nozzle sealing gasket and O-ring.

▲ Without replacing new gasket can lead to: deformation of the tight cap of nozzle, deformation of nozzle, deformation of nozzle orifice, oil leakage and air leakage, which will cause serious damage to the fuel injector and nozzle to break and cause damage to the engine.

When installing the injector on the engine, please carefully check the components related to the installation of the injector, such as the injector pressure plate, screw, injector rod and other accessories are not deformed, and install it in strict accordance with the operation steps of the engine maintenance manual.
It is forbidden to operate the bare injector for a long time in an environment with serious dust pollution and corrosion to iron products.

It is forbidden to operate the bare injector for a long time in a strong magnetic field environment.

2.4. 0445120238 Injector 's Reasons for Not Working Normally

(1) There is air in the oil circuit of the engine fuel system.

(2) Vehicle oil pump oil supply system is not normal.

(3) Engine common rail system oil leakage or pressure limiting valve damage.

(4) There is a short circuit, cutting out and poor contact in the wiring harness connected to the fuel injector of the vehicle.

(5) The long-term placement of the injector causes the anti-rust oil to solidify, and the internal components are stuck or the oil holes are blocked.

▲ Before installing, carefully check whether other components in the common rail system except the fuel injector are damaged so as to prevent the fuel injector from not working properly after being replaced.

2.5. 0445120238 Injector 's Causes of Damage

(1) Didn't operate properly according to engine maintenance manual during disassembly or installation, resulting in damage to the injector .

(2) The fuel oil used for the vehicle does not meet the standard cause damage to the injector, such as: the water content in the fuel oil exceeds the standard, iron powder, aluminum powder, sulfide impurities exceed the standard, etc.

(3) The engine is not regularly maintained according to the engine maintenance manual (please refer to the vehicle maintenance manual for the maintenance mileage). For example, failure to replace the lubricating oil of the engine system for a long time will cause abnormal wear of the engine, excessive exhaust gas volume or a large amount of carbon deposits inside the engine. The filter is not replaced during maintenance or the replaced filter cannot reach the original filter standard. all above reasons can cause damage to the injector.

(4) The abrasion of the oil pump produces iron powder and aluminum powder enter the fuel injector and cause damage to the fuel injector.

(5) The deformation and abrasion of fuel tank result in iron powder or aluminum powder entering the fuel injector and causing damage to the fuel injector.

(6) The fuel injector is damaged due to replacement or adjustment of the relevant parts of the fuel injector. For example, the valve clearance does not meet the standard after the engine is repaired, the replacement or modification of the wiring harness connected to the injector fails to meet the original standard.

(7) The engine is overheated and overloaded for a long time working results in damage to the fuel injector.
(8) The injector will be damaged naturally at the end of its working life.

(9) The injector is magnetized (injector parts' magnetic exceeded) causing the injector to not work properly.
A Before replacing the fuel injector, please check the engine parts carefully according to the engine maintenance manual to avoid the fuel injector being damaged again after replacement.

2.6.0445120238 Injector's Technical Support Obtaining Methods

(1) Injector Technical File, visit <u>http://shumatt.com</u> to get the technical file.

(2) Injector Technical Videos

Facebook: Visit <u>https://www.facebook.com/hison.li</u> to get the technical videos, constantly follow can get more information.

YouTube: <u>https://www.youtube.com/channel/UCByvYBx7VjV_mAfxh_Hu-aw</u> to get the technical videos, constantly follow can get more information.

Shumatt: Visit <u>http://shumatt.com</u> to get the technical videos.

Mob/WhatsApp: +86 13410541523 Email : <u>ruby@shumatt.com</u> © 2022 Shenzhen Shumatt Technology Co., Ltd Tel: +8675523215133 Website : www.shumatt.com

cÓ.

(3) Injector Information Query Software

TruckBook Parts EPC APP, Android/Apple App Store download and install, visit http://shumatt.com to get the download and installation tutorial

(4) Search The fuel injector test data through TruckBook Parts EPC APP. $\mathbb{S}^{\mathbb{N}}$

3.0445120238 Injector's Purchase and Delivery

3.1.0445120238 Injector's Purchase Payment Term

Payment Terms: T/T, PayPal, Alipay, WeChat

Please contact our salesmen for specific payment information.

The Then The

. Then The 3.2.0445120238 Injector's Main Sales Markets

Injector main sales markets: Asia, Europe, North America, South America, Africa etc.

2.50 51.7 2.595 n de la caracteria **3.3.**0445120238 Injector's Declaration Requirements

Shumatt can assist customers to provide the following documents for import customs clearance: : All contract, invoice, packing list, bill of lading, insurance policy, certificate of origin, etc.

3.4.0445120238 Injector's Shipping Ways

173 Destination in China areas: SF Express, Debon Express, the corresponding logistics company can be provided according to customer requirements in special cases.

Destinations out of China's areas: DHL, UPS, FedEx, TNT air, ocean or other shipping methods required by customers.

3.50445120238 Injector's Lead time

Lead time: Send out within 3 – 7 working days after receiving payment (Except for special products and special cases).

3.6.0445120238 Injector's Logistics Time for Destination Out of China's Areas

DHL Logistics Time :

at 14

Country or Region of Departure	Hong Kong, China	Other Countries or Regions of Asia	Australia and New Zealand	Europe	America	Other Countries
China's Mainland	7 Days	7 Days	8 Days	8 Days	8-12 Days	7-10 Days

UPS Logistics Time: Country or Region of Departure: China's Mainland

Country of Destination	Estimated Arrival Time	Country of Destination	Estimated Arrival Time	Country of Destination	Estimated Arrival Time
Japan	3 Days	UK	5-7Days	Egypt	5-7 Days
Turkey	5-7 Days	Singapore	3 Days	Switzerland	5-7 Days
Bahrain	5-7 Days	Latvia	7-10 Days	New Zealand	7-10 Days
Sri Lanka	5-7 Days	Thailand	3 Days	Austria	5-7 Days
Romania	5-7 Days	Vietnam	3-5 Days	Estonia	5-7 Days
Malaysia	3-5 Days	Israel	5-7 Days	Mexico	7-10 Days
France	5-7 Days	America	5-7 Days	United Arab Emirates	5-7 Days
Italy	5-7 Days	Netherlands	5-7 Days	Bengal	7-10 Days

Mob/WhatsApp: +86 13410541523 Email:ruby@shumatt.com © 2022 Shenzhen Shumatt Technology Co., Ltd

<u> </u>		enznen Snumatt	Technolog	gy Co., Lta	
Lebanon	5-7 Days	Philippine	3-5 Days	Greece	7-10 Days
South Korea	3 Days	Spain	5-7 Days	Myanmar St	5-7 Days
Canada	5-7 Days	Germany	5-7 Days	Saudi Arabia	7-10 Days
Portugal	5-7 Days	Australia	5-7 Days	South Africa	7-10 Days
Denmark	5-7 Days	Belgium	5-7 Days	Ukraine	7-10 Days
India	7-10 Days	Qatar	7-10 Days	Poland	5-7 Days
Indonesia	3-5 Days	Morocco	7-10 Days	Pakistan	7-10 Days
Kuwait	7-10 Days	The The The	S. 3.	1 . at . at .	Se. 35
The logistics tim	ne is for referer	nce only , subjects are a	according to th	e actual arrival.	9 ^{1,9} 9

3.7.0445120238 Injector's Packing

Domestic express packaging: Usually wrapped in waterproof scotch tape, such as picture No.2. International express packaging: Wrapped with waterproof yellow tape After wrapping the black protective film, such as picture No. 3.

Pallet Shipping: Use fumigation free and recycling trays that meet export requirements, and use white wrapping protective film to wrap and bind with cable ties for the outside, such as picture No. 4, also, the products can be packaged according to customers' requirements.

The packing tray is made of plastic and can be recycled.

Transparent tape, yellow tape, black wrapping protective film, white wrapping protective film are non-degradable materials, please dispose of them properly.

Minors are prohibited from using transparent tape, yellow tape, black wrapping protective film, and white wrapping protective film to avoid personal injury.



Mob/WhatsApp: +86 13410541523 Email:ruby@shumatt.com © 2022 Shenzhen Shumatt Technology Co., Ltd



39.57 Pic No. 4 Pallet Shipping: Use pallet that meet export requirements, and use white wrapping protective film to wrap and bind with cable ties

4.0445120238 Injector's Storage Standard

(1) Choose a suitable storage place

The warehouse and cargo yard where the fuel injector is stored should be kept clean and dry, and away from the factory buildings that generate harmful gases and dust; do not mix with acids, alkalis, salts and other substances; the storage place should have a good drainage system; the cargo yard should be flattened with gravel or furnace ash etc. to enhance the water permeability of the surface layer to keep the reservoir area dry.

(2) Strict requirements of warehousing

Strict inspections should be carried out when the fuel injectors are put into storage, the surface cleaning work should be done well to remove water traces, oil stains, ash and other dirt, remove the rust and do antirust treatment in time. Packaged injectors must be protected from damage.

(3) Keep the warehouse dry and preventing moisture

The relative humidity is usually below 70% for the fuel injectors placed in the room, and the corrosion and h and the of the fuel injectors is significantly reduced. 1000 all's 65

Injectors must be stored in the warehouse, and they are forbidden to store in the same warehouse with commodities with high water content. SPREAT SHUMPY

(4) Stack Properly

After the injector is exposed to rain, the corrosion rate will increase significantly. The purpose of sealing is to isolate the injector from rainwater and humid air, so the warehouse window should be checked in time to avoid rainwater entering the warehouse - Sharr

If the fuel injector package is damaged, it should be repaired or replaced; when the package is damp, the packaging material should be dried; if the original anti-corrosion and oil applied at the factory is found to be damaged or dried up, it should be cleaned and re-applied oil in time.

It is forbidden to leave the injector exposed in the air for a long time. - 100⁰⁴⁷⁵

Mob/WhatsApp: +86 13410541523 Email:ruby@shumatt.com © 2022 Shenzhen Shumatt Technology Co., Ltd

. 19⁵⁵

A It is forbidden to store acids, alkalis, salts and other substances together with the injector.

NOR CL

. 1997 - C

. all 1

- The unpacked fuel injector must be rust-proof during secondary storage.
- 5. Company Information

- **Office Locations**
- Global Exhibitions

5.1. Company Introduction Chinese Name: 深圳市舒马特科技有限公司 English Name: Shenzhen Shumatt Technology Co., Ltd

Mob Phone/WeChat: +86-13410541523

HK Telephone: +852-67653519

Telephone: +86-755-23215133

Email: ruby@shumatt.com

Website: www.shumatt.net

• Shenzhen Office: 11-12, Floor 14, Building 13, Qinchengda Building, Exit A, Honglang North Subway Station, Bao'an District, Shenzhen, China's Mainland

STRUMPT'S RUPPT'

SPERMENT

SPLICE

Shenzhen Office: Room 428-430, Building B, Huafeng Zhigu Technology Industrial Park, Exit B, Fuyong Metro Station, Bao'an District, Shenzhen, China's Mainland

Hong Kong Office: Jianfa Street Industrial Zone, Tuen Mun, New Territories, Hong Kong, China

Mob/WhatsApp: +86 13410541523 Email : <u>ruby@shumatt.com</u> © 2022 Shenzhen Shumatt Technology Co., Ltd

After-sales Service Address: Please contact our salesmen to obtain and provide the corresponding product maintenance reasons (Reference: 1.10.0445120238 Injector Warranty Instructions)

No.	Name	WeChat/WhatsApp	Email	Facebook	YouTube
1	Ruby	+86-13410541523	ruby@shumatt.com	Hison Li	Hison Li
2,1000	lvy soo	+86-18025299821	sales@shumatt.com	Ivy Shumatt	Shumatt IVY
3	Rebecca	+86-18025349821	sales01@shumatt.com	Rebecca SHUMATT	SHUMATT Rebecca
4	Janny	+86-18028749821	sales02@shumatt.com	Janny shumatt	Janny Shumatt
5	Sam	+86-13316859821	Sales8@shumatt.com	Shumatt Sam	Sam Shumatt
6	Natalie	+86- 18938945856	sales15@shumatt.com	Shumatt Natalie	Lin Natalie
7	Ada	+86-1342286353	sales5@shumatt.com	Shumatt Ada	Ada Shumatt
8	Hison Li	+86-18318811871	web@shumatt.com	Hison Li	Hison Li
9	Mecca	+86-18938948618	sales11@shumatt.com	Shumatt Mecca	Shumatt Mecca
10	Eric	+86 18319033618	sales3@shumatt.com		
11	Wayne (Joaquín en español)	+86-13316959821	wayne@shumatt.com	shumattwayne	Wayne Shumatt
12	Sylvia	+86 18312499884	sales6@shumatt.com	Star Stor	1. S.
		Visit http://shumatt.com to ob	tain the latest information of salesme	en	
		PS: Shumatt's sales-men's er	mails are all end with @shumatt.com		d

6. Copyright Statement

-50

and Co

The copyright of any contents (including but not limited to parameters, data, text, charts, images, sounds or videos, etc.) provided in "0445120238 Injector CRIN1-14/16 Technical File" belong to Shenzhen Shumatt Technology Co., Ltd. Without the prior written permission of Shenzhen Shumatt Technology Co., Ltd., you are not allowed to modify any contents in "0445120238 Injector CRIN1-14/16 Technical File" in any way. At the same time, any conditions to spread, re-post, display the contents of "0445120238 Injector CRIN1-14/16 Technical File" should indicate that the cited article is from Shenzhen Shumatt Technology Co., Ltd., Any actions failure to follow above conditions to use "0445120238 Injector CRIN1-14/16 Technical File" will violate the "Copyright Law of the People's Republic of China" and other laws and regulations and the provisions of relevant international conventions. $\varphi^{(k)}$

Mob/WhatsApp: +86 13410541523 Email:ruby@shumatt.com © 2022 Shenzhen Shumatt Technology Co., Ltd